



Connected Collection

Mannington
COMMERCIAL



Cover: Social Modular - Synergy 15213
Installation - Vertical Ashlar
Above: Profile Modular - Collective 42207
Installation - Horizontal Brick Ashlar



Offline Loop Modular - Collective 42207
Installation - Vertical Ashlar



Offline Modular - Collective 42207
Installation - Vertical Ashlar



Online Modular - Synergy 15213
Installation - Horizontal Brick Ashlar



Media Modular - Collective 42207
Installation - Horizontal Brick Ashlar

Connected Collection Accent Colors


With the Connected Collection, you can select a custom accent stripe color for both the Media Modular and Social Modular styles. Choose from 30 Antron® Lumena™ yarn colors in brights and neutrals to perfectly coordinate your carpet with any design palette.

Custom accent stripe requires 500 yd² minimum.

| | | | | | |
|---|---|---|--|---|---|
|  |  |  |  |  |  |
| Chablis 486 | Bean Sprout 297 | Raw Silk 278 | Warm Pewter 276 | Silver 170 | Granite 152 |
|  |  |  |  |  |  |
| Pigeon 144 | Brownstone 203 | Peppercorn 130 | Obsidian 114 | Dark Rosewood 341 | Majestic Purple 852 |
|  |  |  |  |  |  |
| Autumn Glory 381 | Cayenne 391 | Raspberry 333 | Dress Blues 738 | Blue Velvet 770 | Slate Blue 753 |
|  |  |  |  |  |  |
| Atlantis 693 | Tungsten 625 | Blackened Teal 731 | Saguaro 516 | Jungle Green 527 | Chartreuse 484 |
|  |  |  |  |  |  |
| Bold Gold 490 | Medallion 487 | Firecracker 401 | Copperplate 424 | Spice 465 | Gold 470 |

Proven by Third-Party Testing

All of our carpet products are third-party tested and proven to exceed industry standards in appearance retention, texture retention, fire safety factors and static generation, and our modular carpet exceeds industry standards in dimensional stability—so you can be sure that the carpet you specify will perform for years to come.

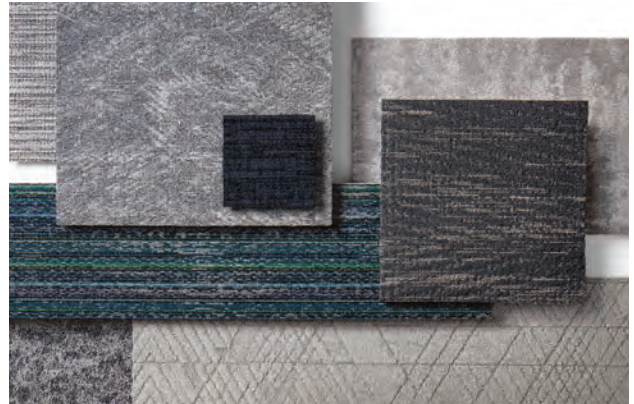

Easier to Maintain

- > All the carpet fiber we use delivers greater resilience against matting and resists abrasive wear, keeping the carpet looking better.
- > XGUARD® Stain Resistant Technology provides long-term stain resistance for our space dye products.
- > ColorSafe® Bleach Resistant Technology resists color fade-out from bleach spills for our space dye products.
- > Moisture-barrier backings are built to withstand aggressive wet cleanings.

Backing Advantages

- > Infinity® 2 Modular backing provides exceptional performance with a moisture barrier.
- > Infinity® 2 Modular backing offers superior tuft bind and dimensional stability with a limited lifetime warranty.

Sustainable Solutions

- > All of our carpets have EPDs and HPDs.
- > Infinity® 2 Modular backing is CRI Green Label Plus Certified and NSF/ANSI 140 Gold Certified
- > Infinity® 2 Modular backing contains recycled content

3.5 TARR


- > Connected Collection carpet was specifically designed with a 3.5 TARR rating for use in severe environments with rigorous foot traffic situations such as public areas, lobbies and dining facilities as well as transportation service areas such as airports. The TARR on our carpets is tested and verified by an independent lab.



Antron® type 6,6 nylon is engineered with stain and soil protection and offers long-lasting texture retention. Antron® fiber is designed for a more effective, longer-lasting clean, helping to reduce your total cost of ownership and contributing to a cleaner facility.


Better Shape, Better Performance

Antron® fiber has a sturdy, 4-hole hollow filament shape that makes it more resistant to crushing and matting than type 6 nylon fiber.





Antron® Fiber
4-hole hollow filament

< 1.5 MR (Modification Ratio)




Common Type 6 Nylon
trilobal filament

+ 2 MR (Modification Ratio)




Soil Resistance

Unlike a typical type 6 nylon fiber, the unique shape and low modification ratio of Antron® fiber does not provide anywhere for dirt to collect. This ensures better soil release during vacuuming and hot water extraction. Between cleanings, the 4-hole hollow filament structure also diffuses light, reducing the appearance of soil and helping the carpet look cleaner.



Antron® Fiber
4-hole hollow filament



Common Type 6 Nylon
trilobal filament

XGUARD® Stain Resistance

Carpets with Mannington Commercial's proprietary XGUARD® stain resistant technology offer the highest level of performance in permanent stain resistance. Protection against common stains as well as ease of maintenance result in long-term appearance retention and extend the life of the carpet.

ColorSafe® Bleach Resistance

Mannington Commercial's ColorSafe® bleach resistant technology works from within the fiber to protect carpets against bleach and maintain colorfastness. Carpets with ColorSafe® are protected from occasional spills and drips of diluted disinfecting bleach solution, ensuring that colors remain bright and that the carpet can withstand the toughest cleaning conditions.

Connected Collection

| Style | Media (Modular) | Offline (Modular) | Offline Loop (Modular) |
|--------------------------------------|--|------------------------------|--|
| Construction | Tip-sheared Patterned Loop | Tip-sheared Patterned Loop | Patterned Loop |
| Face Fiber | Type 6,6 Nylon | Type 6,6 Nylon | |
| Dye Method | Solution | Solution | Type 6,6 Nylon |
| Gauge | 5/64 (50.39 per 10 cm) | 5/64 (50.39 per 10 cm) | Solution |
| Stitches Per Inch | 9.66 (38.03 per 10 cm) 6,468 | 9.66 (38.03 per 10 cm) 6,545 | 5/64 (50.39 per 10 cm) |
| Density | (240.34 kg/m³) | (243.20 kg/m³) | 9.66 (38.03 per 10 cm) |
| Pile Thickness | 0.128" (3.25 mm) | 0.121" (3.07 mm) | 6.655 (247.29 kg/m³) |
| Weight | 23 oz/yd² (780 g/m²) | 22 oz/yd² (746 g/m²) | 0.119" (3.02 mm) |
| Backing Type | Infinity® 2 Modular | Infinity® 2 Modular | 22 oz/yd² (746 g/m²) |
| Size | 24" x 24" (60.96 x 60.96 cm) | 24" x 24" (60.96 x 60.96 cm) | Infinity® 2 Modular |
| Colors | 16 | 16 | 24" x 24" (60.96 x 60.96 cm) |
| Packaging | 8 yd² / 18 Tiles | 8 yd² / 18 Tiles | 16 |
| Adhesive | Infinity 2 Adhesive | Infinity 2 Adhesive | 8 yd² / 18 Tiles |
| Installation Method | Horizontal Brick Ashlar | Vertical Ashlar | Infinity 2 Adhesive Vertical Ashlar |
| Testing | | | |
| Dimensional Stability (Aachen Test) | Passes | | |
| Electrostatic Propensity (AATCC 134) | Less than 3.0 kV | | |
| Flooring Radiant Panel (ASTM E648) | Passes - Class 1; ≥ 0.45 watts/cm² | | |
| Smoke Density (ASTM E662) | Passes - ≤ 450 | | |
| Methenamine Pill Test (ASTM D2859) | Passes | | |
| Hexapod (ASTM D5252) TARR | 3.5 | | |
| Environmental Data | | | |
| NSF/ANSI 140 Certification | Infinity® 2 Modular - Gold | | |
| Recycled Content | Contains recycled content | | |
| Indoor Air Quality | CRI Green Label Plus Certified | | |
| Product Declarations | EPD, HPD | | |
| LEED Scoreboard | May contribute to LEED credits: LEED 2009: MRc5 Regional Materials; IEQ4.1 Low Emitting Adhesives; IEQ4.3 Low Emitting Materials - Flooring LEED v4: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials | | |
| mindful MATERIALS | Visit mM Origin website, mindfulmaterials.origin.build, for current transparency information | | |
| Manufacturing | Calhoun, GA (USA) - ISO 14001 Registered | | |
| Warranty | | | |
| | Limited Lifetime Wear & Backing Warranty Limited 15-Year XGUARD® Stain Resistant Warranty Limited 15-Year ColorSafe® Bleach Resistant Warranty | | |

- Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance.
- Protective chair pads are recommended under office chairs with roller casters to preserve appearance and avoid premature wear.
- As with all quality carpets, slight variation in color may occur from dye lot to dye lot.
- Backing or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance.
- This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.
- The inherent characteristics of geometric linear patterns can result in double-dark or double-light lines at the seam and to some extent pattern run-off or bias. This is not a manufacturing defect, and as such, should be considered when selecting a modular carpet installation method.
- Cut piles, cut and loops and tip-sheared constructions are not recommended for heavy commercial traffic, corridors or through channeled traffic. Please contact your Mannington Commercial representative for information regarding these constructions and your specific end use application.
- Please make your final selection from an actual swatch. To order samples, go to manningtoncommercial.com or call 800.241.2262 ext. 6913.

Connected Collection

| Style | Online (Modular) | Profile (Modular) | Social (Modular) |
|--------------------------------------|--|---|---|
| Construction | Tip-sheared Patterned Loop | Tip-sheared Patterned Loop | Tip-sheared Patterned Loop |
| Face Fiber | Type 6,6 Nylon | Type 6,6 Nylon | Type 6,6 Nylon |
| Dye Method | Solution | Solution | Solution |
| Gauge | 5/64 (50.39 per 10 cm) | 5/64 (50.39 per 10 cm) | 5/64 (50.39 per 10 cm) |
| Stitches Per Inch | 9.66 (38.03 per 10 cm) 6,468 | 9.66 (38.03 per 10 cm) 6,786 | 9.66 (38.03 per 10 cm) 6,545 |
| Density | (240.34 kg/m³) | (252.15 kg/m³) | (243.20 kg/m³) |
| Pile Thickness | 0.128" (3.25 mm) | 0.122" (3.10 mm) | 0.121" (3.07 mm) |
| Weight | 23 oz/yd² (780 g/m²) | 23 oz/yd² (780 g/m²) | 22 oz/yd² (746 g/m²) |
| Backing Type | Infinity® 2 Modular | Infinity® 2 Modular | Infinity® 2 Modular |
| Size | 24" x 24" (60.96 x 60.96 cm) | 24" x 24" (60.96 x 60.96 cm) | 24" x 24" (60.96 x 60.96 cm) |
| Colors | 16 | 16 | 16 |
| Pattern Repeat | N/A | N/A | N/A |
| Packaging | 8 yd² / 18 Tiles | 8 yd² / 18 Tiles | 8 yd² / 18 Tiles |
| Adhesive | Infinity 2 Adhesive | Infinity 2 Adhesive | Infinity 2 Adhesive |
| Installation Method | Horizontal Brick Ashlar | Horizontal Brick Ashlar and Vertical Ashlar | Horizontal Brick Ashlar and Vertical Ashlar |
| Testing | | | |
| Dimensional Stability (Aachen Test) | Passes | | |
| Electrostatic Propensity (AATCC 134) | Less than 3.0 kV | | |
| Flooring Radiant Panel (ASTM E648) | Passes - Class 1; ≥ 0.45 watts/cm² | | |
| Smoke Density (ASTM E662) | Passes - ≤ 450 | | |
| Methenamine Pill Test (ASTM D2859) | Passes | | |
| Hexapod (ASTM D5252) TARR | 3.5 | | |
| Environmental Data | | | |
| NSF/ANSI 140 Certification | Infinity® 2 Modular - Gold | | |
| Recycled Content | Contains recycled content | | |
| Indoor Air Quality | CRI Green Label Plus Certified | | |
| Product Declarations | EPD, HPD | | |
| LEED Scoreboard | May contribute to LEED credits: LEED 2009: MRc5 Regional Materials; IEQ4.1 Low Emitting Adhesives; IEQ4.3 Low Emitting Materials - Flooring LEED v4: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials | | |
| mindful MATERIALS | Visit mM Origin website, mindfulmaterials.origin.build, for current transparency information | | |
| Manufacturing | Calhoun, GA (USA) - ISO 14001 Registered | | |
| Warranty | | | |
| | Limited Lifetime Wear & Backing Warranty Limited 15-Year XGUARD® Stain Resistant Warranty Limited 15-Year ColorSafe® Bleach Resistant Warranty | | |

- Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance.
- Protective chair pads are recommended under office chairs with roller casters to preserve appearance and avoid premature wear.
- As with all quality carpets, slight variation in color may occur from dye lot to dye lot.
- Backing or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance.
- This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.
- The inherent characteristics of geometric linear patterns can result in double-dark or double-light lines at the seam and to some extent pattern run-off or bias. This is not a manufacturing defect, and as such, should be considered when selecting a modular carpet installation method.
- Cut piles, cut and loops and tip-sheared constructions are not recommended for heavy commercial traffic, corridors or through channeled traffic. Please contact your Mannington Commercial representative for information regarding these constructions and your specific end use application.
- Please make your final selection from an actual swatch. To order samples, go to manningtoncommercial.com or call 800.241.2262 ext. 6913.