



Urban Patina Collection &
Urban Grid Collection

Mannington
COMMERCIAL



Multiple collections with simplified pricing
(each collection = one price).

No moisture testing required. See installation
instructions for complete details.

Guaranteed shipping.

Stunning selection, crafted for any space.

**For more information, contact your Mannington
representative or call us at 800-241-2262.**

UP TO

500

SQUARE
YARDS OF
ENTRYWAY
SYSTEMS

UP TO

1,000

SQUARE
YARDS OF
MODULAR
CARPET

GUARANTEED SHIPPING

5

DAYS ON MODULAR CARPET

1

DAY ON ENTRYWAY SYSTEMS

Broadloom products available with normal lead times only.



Cover: Urban Patina Collection Span (Modular) - Crosstown 11212
Installation - Horizontal Brick Ashlar
Above: Urban Patina Collection Span (Modular) - Region 84218
Installation - Horizontal Brick Ashlar



Urban Patina Collection Span (Modular) - District 13219
Installation - Horizontal Brick Ashlar



Urban Patina Collection Elevation (Modular) - Metro 14215
Installation - Horizontal Brick Ashlar



Urban Patina Collection Elevation (Modular) - Province 82214
Installation - Horizontal Brick Ashlar



Urban Patina Collection Elevation (Modular) - Ward 35216
Installation - Horizontal Brick Ashlar



Urban Grid Collection Scaffold (Modular) - Grosstown 11212
Installation - Horizontal Brick Ashlar




Urban Grid Collection Scaffold (Broadloom) - Region 84218



Urban Grid Collection Mesh (Modular) - Crosstown 11212
Installation - Horizontal Brick Ashlar



With industry-leading fiber systems and superior manufacturing, our carpets look better and last up to 75% longer than any other carpet in the marketplace.

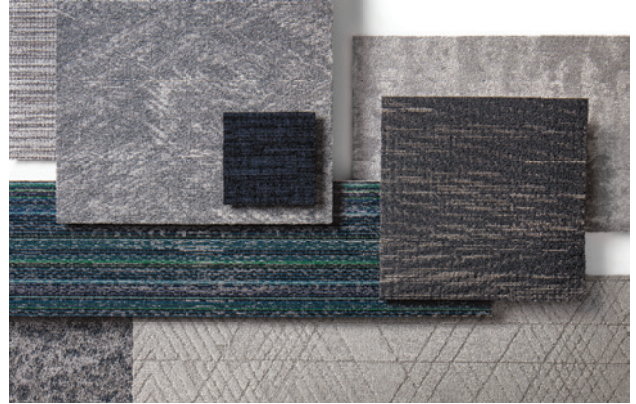

Proven by Third-Party Testing

Every carpet we make at Mannington Commercial is third-party tested and proven to exceed industry standards in appearance retention, texture retention, fire safety factors and static generation, and our modular carpet exceeds industry standards in dimensional stability – so you can be sure that the carpet you specify will perform for years to come.

Easier to Maintain

- > **XGUARD® Stain Resistant Technology** provides long-term stain resistance for our space dye products.
- > **ColorSafe® Bleach Resistant Technology** resists color fade-out from bleach spills for our space dye products.
- > **Moisture-barrier backings** are built to withstand aggressive wet cleanings.

Backing Advantages

- > **Infinity® 2 Modular** backing provides exceptional performance with a moisture barrier.
- > **UltraBac® RE** broadloom backing offers strong performance and excellent environmental benefits.
- > **Integra® HP** is a high-performance broadloom backing with an impermeable moisture barrier, featuring a limited lifetime wick-back warranty.

Sustainable Solutions

- > Supported with EPDs and HPDs.
- > **Infinity® 2 Modular** and **Integra® HP** broadloom backings are NSF/ANSI 140 Gold Certified and contain recycled content.
- > **UltraBac® RE** broadloom backing is NSF/ANSI 140 Platinum Certified and contains a minimum of 10% post-consumer recycled content.
- > **ECONYL®** type 6 solution-dyed nylon is 100% regenerated from pre- and post-consumer waste.

3.5 TARR

- > Mannington Commercial carpets are made with a minimum 3.5 TARR (Texture Appearance Retention Rating), meaning any carpet you specify will be able to withstand severe traffic. The 3.5 TARR on our carpets is tested and verified by an independent lab.



**ECONYL® Regenerated Nylon:
No waste. No new resources.
Just endless possibilities.**

Made from waste, ECONYL® is infinitely recyclable and can unleash endless possibilities. It's all part of the ECONYL® brand vision to make the world a better place by pioneering closed loop regeneration processes and delivering sustainable products.

ECONYL® reduces the amount of global waste by collecting both pre and post-consumer waste, including

spent carpet, fishing nets, fabrics and industrial plastic components, and regenerating this waste into new nylon that has the same quality as virgin products. For every 10,000 tons of ECONYL® raw material, we are able to save 70,000 barrels of crude oil and avoid 57,000 tons of CO₂ emissions. And, best of all, ECONYL® is engineered so it can be entirely regenerated again, and again—pushing ever closer to Aquafil's ultimate goal of a fiber made from 100% post-consumer waste, while maintaining ultimate standards in performance and quality.



Reclamation Process



State-of-the-Art Extrusion Operation



Reclaimed Fishing Nets

No Moisture Testing Required*

Solutions crafted for high-moisture conditions. Defeat moisture issues with carpet backings that do not require moisture testing*.

We have solutions for broadloom and modular carpet to make moisture worries evaporate. From backing options to adhesives to a dry installation system, explore solutions that defeat moisture concerns while enhancing the performance of your floor.

	Infinity 2 Pressure Sensitive Adhesive	XpressStep™ Spray Adhesive	FreLock Tabs	Integra-2 Adhesive	Ultra Adhesive
Infinity® 2 Modular Backing	✓	✓	✓		
Infinity® 2 MG Modular Backing	✓	✓	✓		
Infinity® 2 MG Cushion Modular Backing	✓	✓			
Integra® HP Broadloom Backing				✓	
UltraBac® RE Broadloom Backing					✓

* Assumes intact vapor barrier, no standing water or stained concrete, no hydrostatic pressure, and for our broadloom backings (Integra® HP and UltraBac® RE) pH levels must never exceed 10. Please refer to our installation instructions for further details.

Urban Grid Collection

Style	Mesh (Broadloom)	Mesh (Modular)
Construction	Textured Patterned Loop	Textured Patterned Loop
Face Fiber	ECONYL® 100% Regenerated Type 6 Nylon	ECONYL® 100% Regenerated Type 6 Nylon
Dye Method	Solution	Solution
Gauge	5/64 (50.39 per 10 cm)	5/64 (50.39 per 10 cm)
Stitches Per Inch	10.33 (40.67 per 10 cm)	9 (35.43per 10 cm)
Density	5,538 (205.78 kg/m³)	5,305 (197.12 kg/m³)
Pile Thickness	0.104" (2.64 mm)	0.095" (2.41 mm)
Weight	16 oz/yd² (542 g/m²)	14 oz/yd² (475 g/m²)
Backing Type	UltraBac® RE, Integra® HP	Infinity® 2 Modular
Sizes	12'6" (3.81 m)	18" x 36" (45.72 x 91.44 cm)
Colors	8	8
Pattern Repeat	Random Pattern Match	N/A
Packaging	N/A	8 yd² / 16 tiles
Adhesive	Ultra Adhesive Integra-2 Adhesive	Infinity 2 Adhesive
Installation Method	N/A	Horizontal Brick Ashlar
Testing		
Dimensional Stability (Aachen Test)	Passes	
Electrostatic Propensity (AATCC 134)	Less than 3.0 kV	
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; ≥ 0.45 watts/cm²	
Smoke Density (ASTM E662)	Passes - ≤ 450	
Methenamine Pill Test (ASTM D2859)	Passes	
Hexapod (ASTM D5252) TARR	3.5-Severe	
Environmental Data		
NSF / ANSI-140 Certification	UltraBac® RE - Platinum, Integra® HP - Gold, Infinity® 2 Modular - Gold	
Recycled Content	Contains recycled content	
Indoor Air Quality	CRI Green Label Plus Certified	
Product Declarations	EPD, HPD	
Carbon Offset	Carbon Offset 105% (Cradle to Gate (A1-A3); 13.87kg CO2e/yd²)	
LEED Scoreboard	LEED 2009: MRc5 Regional Materials; IEQ4.1 Low Emitting Adhesives; IEQ4.3 Low Emitting Materials - Flooring LEED v4: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials	
mindful MATERIALS	Visit mM Origin website, mindfulmaterials.origin.build, for current transparency information	
Manufacturing	Calhoun, GA (USA) - ISO 14001 Certified	
Warranty		
	Limited Lifetime Wear & Backing Limited 15-Year XGUARD® Stain Resistant Limited 15-Year ColorSafe® Bleach Resistant	

- Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance.
- Protective chair pads are recommended under office chairs with roller casters to preserve appearance and avoid premature wear.
- As with all quality carpets, slight variation in color may occur from dye lot to dye lot.
- Backing or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance.
- This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.
- The inherent characteristics of geometric linear patterns can result in double-dark or double-light lines at the seam and to some extent pattern run-off or bias. This is not a manufacturing defect, and as such, should be considered when selecting a modular carpet installation method.
- Please make your final selection from an actual swatch. To order samples, go to manningtoncommercial.com or call 800.241.2262 ext. 6913.

Urban Grid Collection

Style	Scaffold (Broadloom)	Scaffold (Modular)
Construction	Textured Patterned Loop	Textured Patterned Loop
Face Fiber	ECONYL® 100% Regenerated Type 6 Nylon	ECONYL® 100% Regenerated Type 6 Nylon
Dye Method	Solution	Solution
Gauge	5/64 (50.39 per 10 cm)	5/64 (50.39 per 10 cm)
Stitches Per Inch	10.66 (41.97 per 10 cm)	9.33 (36.73 per 10 cm)
Density	5,538 (205.78 kg/m³)	5,305 (197.12 kg/m³)
Pile Thickness	0.104" (2.64 mm)	0.095" (2.41 mm)
Weight	16 oz/yd² (542 g/m²)	14 oz/yd² (475 g/m²)
Backing Type	UltraBac® RE, Integra® HP	Infinity® 2 Modular
Sizes	12'6" (3.81 m)	18" x 36" (45.72 x 91.44 cm)
Colors	8	8
Pattern Repeat	Random Pattern Match	N/A
Packaging	N/A	8 yd² / 16 tiles
Adhesive	Ultra Adhesive Integra-2 Adhesive	Infinity 2 Adhesive
Installation Method	N/A	Horizontal Brick Ashlar
Testing		
Dimensional Stability (Aachen Test)	Passes	
Electrostatic Propensity (AATCC 134)	Less than 3.0 kV	
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; ≥ 0.45 watts/cm²	
Smoke Density (ASTM E662)	Passes - ≤ 450	
Methenamine Pill Test (ASTM D2859)	Passes	
Hexapod (ASTM D5252) TARR	3.5	
Environmental Data		
NSF/ANSI 140 Certification	Infinity® 2 Modular - Gold	
Recycled Content	Contains recycled content	
Indoor Air Quality	CRI Green Label Plus Certified	
Product Declarations	EPD, HPD	
Carbon Offset	Carbon Offset 105% (Cradle to Gate (A1-A3); 13.87kg CO2e/yd²)	
LEED Scoreboard	LEED 2009: MRc5 Regional Materials; IEQ4.1 Low Emitting Adhesives; IEQ4.3 Low Emitting Materials - Flooring LEED v4: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials	
mindful MATERIALS	Visit mM Origin website, mindfulmaterials.origin.build, for current transparency information	
Manufacturing	Calhoun, GA (USA) - ISO 14001 EMS & ISO 9001 QMS Certified	
Warranty		
	Limited Lifetime Wear & Backing Limited 15 Year XGUARD® Stain Resistant Limited 15 Year ColorSafe® Bleach Resistant	

- Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance.
- Protective chair pads are recommended under office chairs with roller casters to preserve appearance and avoid premature wear.
- As with all quality carpets, slight variation in color may occur from dye lot to dye lot.
- Backing or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance.
- This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.
- The inherent characteristics of geometric linear patterns can result in double-dark or double-light lines at the seam and to some extent pattern run-off or bias. This is not a manufacturing defect, and as such, should be considered when selecting a modular carpet installation method.
- Please make your final selection from an actual swatch. To order samples, go to manningtoncommercial.com or call 800.241.2262 ext. 6913.

Urban Patina Collection

Style	Elevation (Modular)	Span (Modular)
Construction	Textured Patterned Loop	Textured Patterned Loop
Face Fiber	ECONYL® 100% Regenerated Type 6 Nylon	ECONYL® 100% Regenerated Type 6 Nylon
Dye Method	Solution	Solution
Gauge	5/64 (50.39 per 10 cm)	5/64 (50.39 per 10 cm)
Stitches Per Inch	916 (36.06 per 10 cm)	8.83 (34.76 per 10 cm)
Density	5,538 (205.78 kg/m³)	5,538 (205.78 kg/m³)
Pile Thickness	0.091" (2.31 mm)	0.091" (2.31 mm)
Weight	14 oz/yd² (475 g/m²)	14 oz/yd² (542 g/m²)
Backing Type	Infinity® 2 Modular	Infinity® 2 Modular
Sizes	18" x 36" (45.72 x 91.44 cm)	18" x 36" (45.72 x 91.44 cm)
Colors	8	8
Packaging	8 yd² / 16 tiles	8 yd² / 16 tiles
Adhesive	Infinity 2 Adhesive	Infinity 2 Adhesive
Installation Method	Horizontal Brick Ashlar, Monolithic, Vertical Ashlar	Horizontal Brick Ashlar, Monolithic, Vertical Ashlar
Testing		
Dimensional Stability (Aachen Test)	Passes	
Electrostatic Propensity (AATCC 134)	Less than 3.0 kV	
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; ≥ 0.45 watts/cm²	
Smoke Density (ASTM E662)	Passes - ≤ 450	
Methenamine Pill Test (ASTM D2859)	Passes	
Hexapod (ASTM D5252) TARR	3.5	
Environmental Data		
NSF/ANSI 140 Certification	Infinity® 2 Modular - Gold	
Recycled Content	Contains recycled content	
Indoor Air Quality	CRI Green Label Plus Certified	
Product Declarations	EPD, HPD	
Carbon Offset	Carbon Offset 105% (Cradle to Gate (A1-A3); 13.87kg CO2e/yd²)	
LEED Scoreboard	LEED 2009: MRc5 Regional Materials; IEQ4.1 Low Emitting Adhesives; IEQ4.3 Low Emitting Materials - Flooring LEED v4: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials	
mindful MATERIALS	Visit mM Origin website, mindfulmaterials.origin.build, for current transparency information	
Manufacturing	Calhoun, GA (USA) - ISO 14001 EMS & ISO 9001 QMS Certified	
Warranty		
	Limited Lifetime Wear & Backing	
	Limited 15 Year XGUARD® Stain Resistant	
	Limited 15 Year ColorSafe® Bleach Resistant	

- Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance.
- Protective chair pads are recommended under office chairs with roller casters to preserve appearance and avoid premature wear.
- As with all quality carpets, slight variation in color may occur from dye lot to dye lot.
- Backing or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance.
- This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.
- The inherent characteristics of geometric linear patterns can result in double-dark or double-light lines at the seam and to some extent pattern run-off or bias. This is not a manufacturing defect, and as such, should be considered when selecting a modular carpet installation method.
- Please make your final selection from an actual swatch. To order samples, go to manningtoncommercial.com or call 800.241.2262 ext. 6913.