

MUTE 4258-16 FOR ARENA 82X0

PROJECT PROJÉT

SPEC TYPE

NOTES




ADAPTER FINISH FINI DE L'ADAPTATEUR




BLKE

WHE

SHADE FINISH FINI ABAT-JOUR

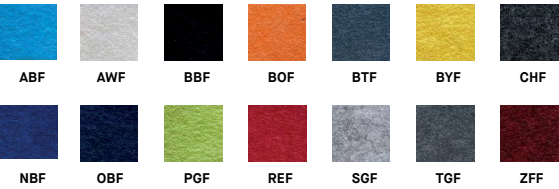

ADDITIONAL PREMIUM COLORS AVAILABLE - SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

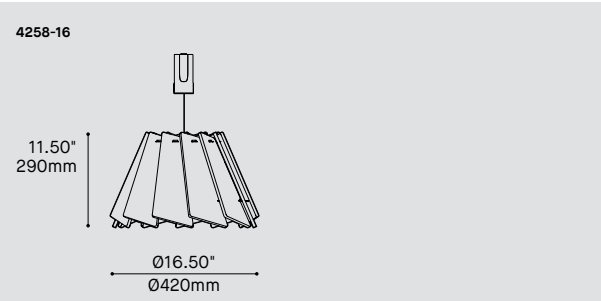


ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE		CODE		
MODEL		MODÈLE		4258-16		
4258-16		MUTE 16"				
LIGHT SOURCE		SOURCE LUMINEUSE		LEDA		
LEDA		SPECIAL OUTPUT FOR ARENA, 11.2W * TOTAL DC LOAD OF INSTALLED LIGHT SOURCES MUST NOT EXCEED 90W OR 180W DEPENDING ON THE SELECTED OPTION				
COLOR TEMPERATURE		TEMPÉRATURE DE COULEUR				
27*		2700K				
30		3000K				
35		3500K				
40		4000K				
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE						
COLOR RENDERING INDEX		INDICE DE RENDU DE COULEUR (IRC)				
80		80+ CRI				
90*		90+ CRI				
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE						
CABLE LENGTH		LONGUEUR DE CÂBLE				
24		24" CABLE (STD LENGTH)				
**		CUSTOM CABLE LENGTH (PLEASE SPECIFY)				
MOUNTING		MONTAGE		TAA		
TAA		ARENA ADAPTOR (2782)				
ADAPTER FINISH		FINI ADAPTATEUR				
BLKE		BLACK FINE TEXTURED				
WHE		WHITE FINE TEXTURED				
POWER CORD FINISH		FINI ADAPTATEUR				
BLK		BLACK POWER CORD				
WH		WHITE POWER CORD				
SHADE FINISH		FINI ABAT-JOUR				
ABF		AZURE BLUE FELT	BYF	BANANA YELLOW FELT	REF	RED FELT
AWF		ARCTIC WHITE FELT	CHF	CHARCOAL FELT	SGF	SILVER GRAY FELT
BBF		BASIC BLACK FELT	NBF	NAVY BLUE FELT	TGF	TITANIUM GRAY FELT
BOF		BLOOD ORANGE FELT	OBF	OCEAN BLUE FELT	ZFF	ZINFANDEL FELT
BTF		BATTLESHIP GRAY FELT	PGF	PEAR GREEN FELT		
PREMIUM*		PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE				
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE						
DIFFUSER FINISH		FINI DIFFUSEUR		WH		
WH		WHITE				

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:	Mute is a soft, colorful and sound absorbing downlight pendant composed of twelve felt acoustic panels surrounding a custom LED light source. Precision cut chrome top cover plate. The custom CNC cut felt panels are made from recycled PET bottles and are recyclable. Available in 30 colors.
INSTALLATION:	Magnetically positioned anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment. The adapter has a hook for extra safety. Clip-on acoustic panels.
LIGHT SOURCE:	Custom LED light source distributing a uniform and direct light.
ADAPTER:	Custom designed aluminum base offered in white or black architectural grade finish.
CERTIFIED:	c-CSA-us
CONCEPTION:	Ce luminaire chaleureux et coloré est composé de douze panneaux acoustiques feutrés encerclant une source DEL. Plaque chromée découpée avec précision
INSTALLATION:	Positionné magnétiquement n'importe où sur l'ARENA pour faciliter l'installation ou la reconfiguration de l'éclairage sur site. L'adaptateur est muni d'un crochet pour une double sécurité. Panneaux acoustiques se fixant rapidement et sans outils autour du noyau central.
SOURCE LUMINEUSE:	Mute est composée d'un module lumineux DEL fait sur mesure.
ADAPTATEUR:	Base en aluminium conçu sur mesure offert avec une finition noire ou blanche de grade architectural.
CERTIFIÉ:	c-CSA-us

ARENA - ADAPTER TAA

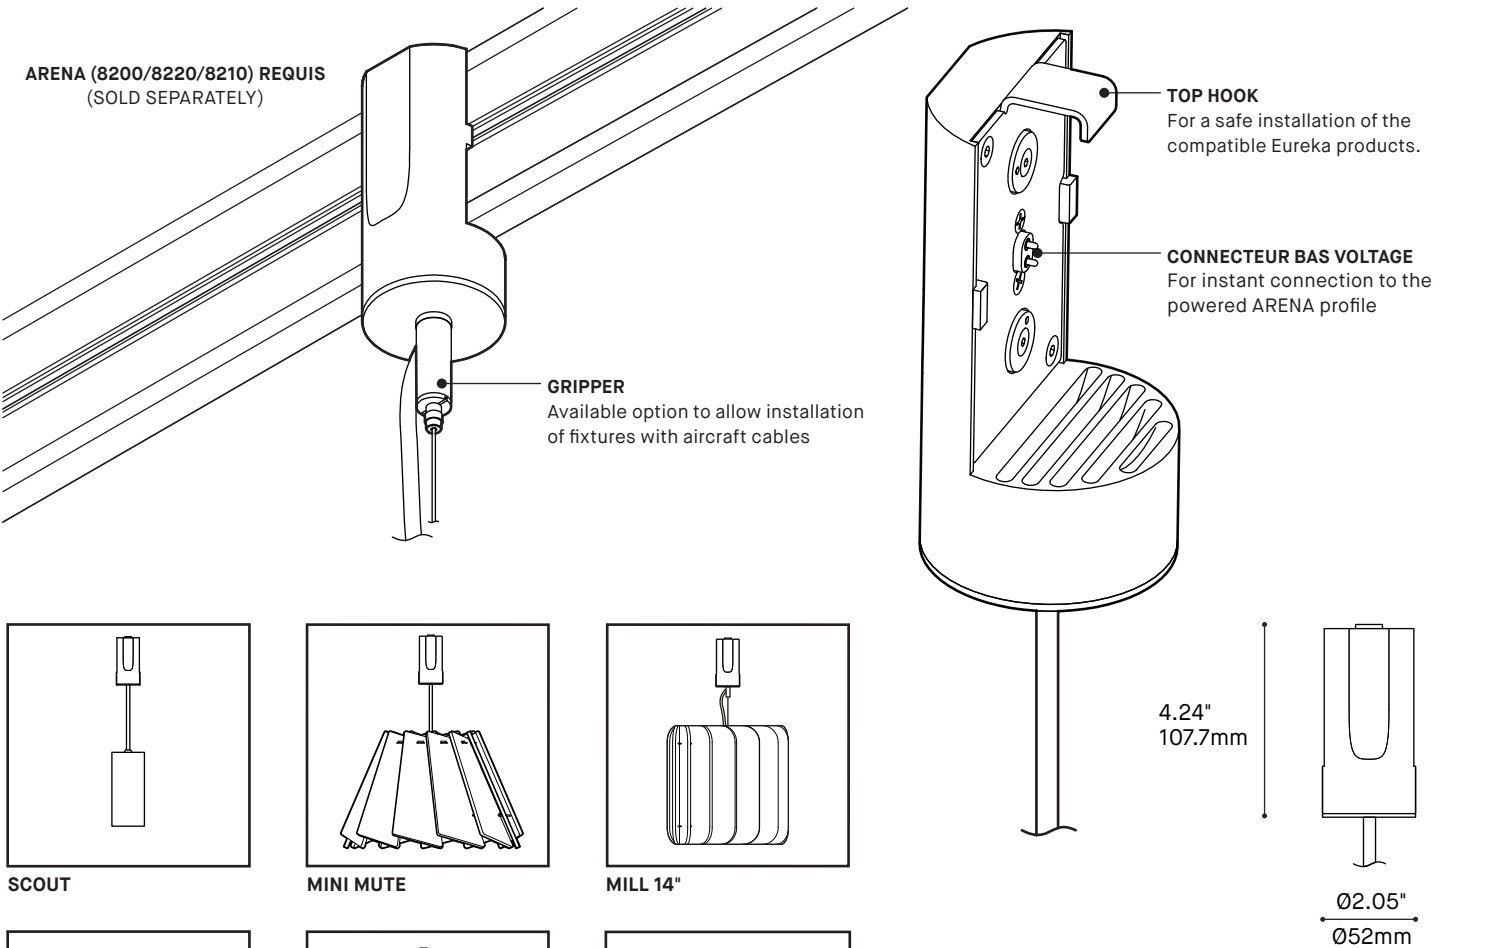


EVEN MORE POSSIBILITIES
This adapter allows multiple Eureka luminaires to be magnetically positioned anywhere on all ARENA structures. For easy installation or on-site reconfiguration of the lighting environment. Cable length is not field adjustable and must be specified to desired length.

PRODUCT SPECIFICATIONS	SCOUT 4048/4049-XX	MINI MUTE 4258-16	MILL 4277D-14	BLOOM 4269-XX	CELESTE 4010-CEL1	MIKA 3230-8
PERFORMANCE						
SYSTEM WATTAGE	7.8 W DC	11.2 W DC	7.8 W DC	8 W DC	8.9 W DC	8 W DC
DELIVERED LUMENS (4000K)	855 LM	707 LM	593 LM	605 TO 797 LM	534 LM	806 LM
EFFICACY	109.6 LM/W	63 LM/W	76 LM/W	75.6 TO 99.6 LM/W	60 LM/W	100.75 LM/W
OTHER INFORMATION						
WEIGHT	MAX 6.05 LBS / 2.65 KG	5.83 LBS / 2.65 KG	11.3 LBS / 4.9 KG	MAX 9.75 LBS / 4.43KG	2.2 LBS / 1 KG	2.2 LBS / 1 KG
L70 (LUMEN MAINTENANCE)	63,000 HRS	60,000 HRS	63,600 HRS	55,000 HRS	60,000 HRS	55,000 HRS
WELL & LEED STANDARD REQUIREMENTS	(SEE SPECIFIC PRODUCT SPEC SHEET)					


EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
80+	4000K	1.00
80+	3500K	0.98
80+	3000K	0.94
80+	2700K	0.91
90+	4000K	0.88
90+	3500K	0.85
90+	3000K	0.81
90+	2700K	0.77

LIGHT DISTRIBUTIONAV

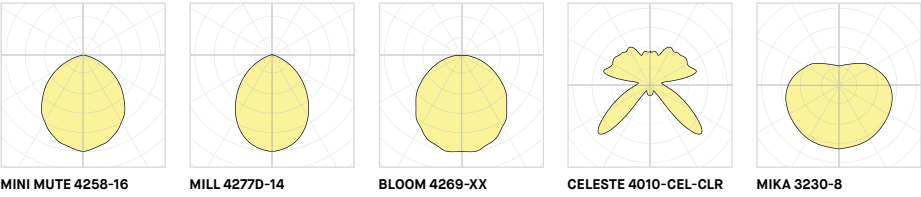

ARENA - ADAPTATEUR TAA

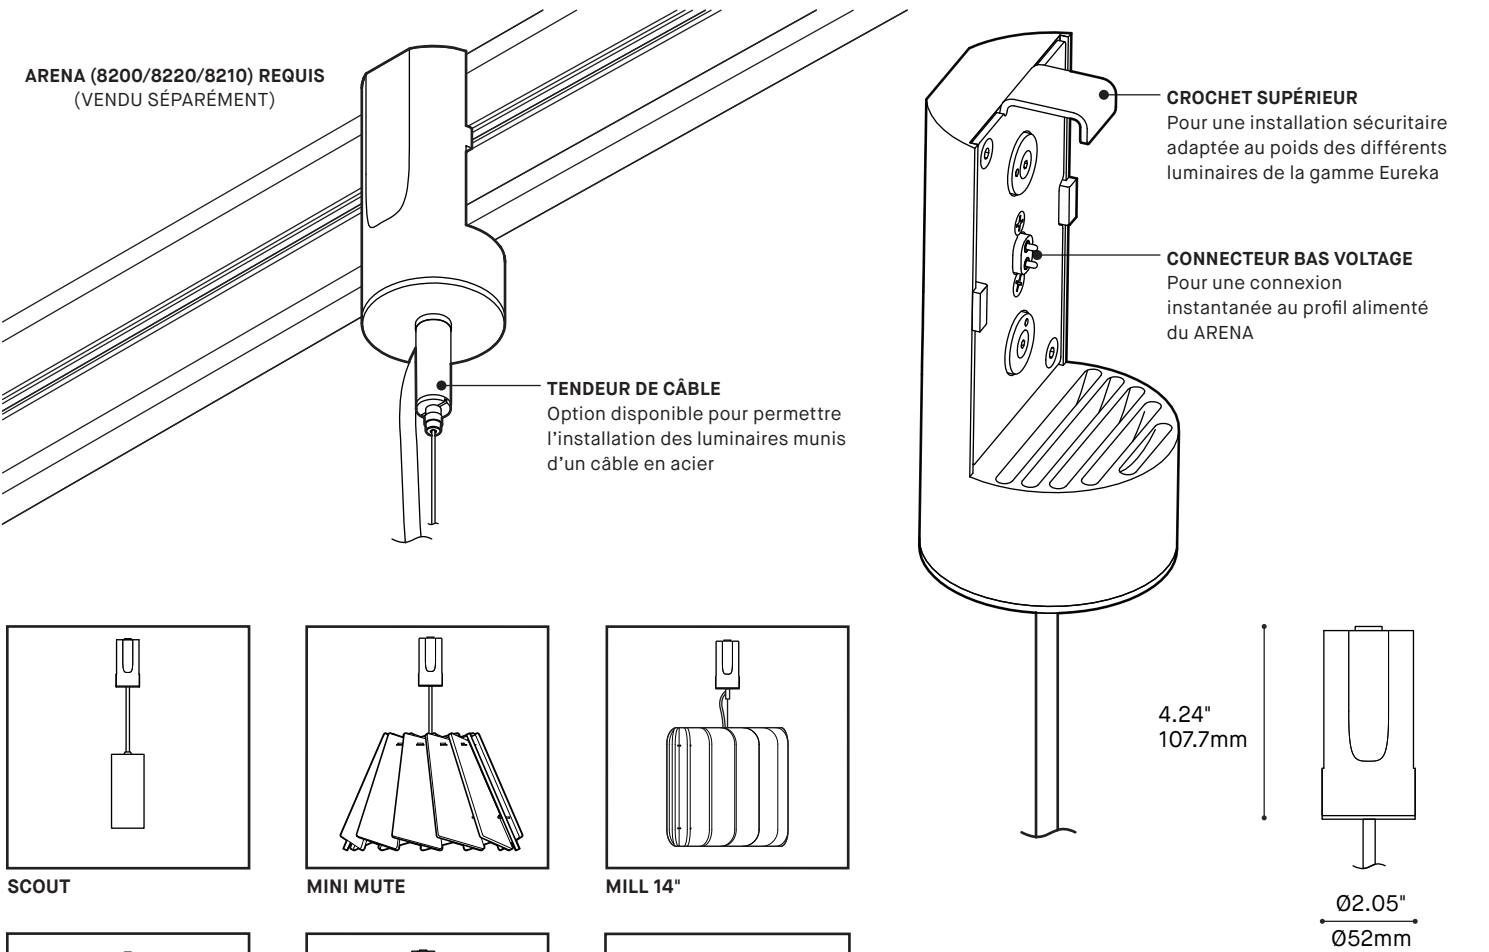


ENCORE PLUS DE POSSIBILITÉS
Grâce à cet adaptateur, de nombreux luminaires Eureka peuvent être positionnés magnétiquement n'importe où sur les différentes structures ARENA.
Pour une installation facile ou une reconfiguration de l'éclairage sur site.
La longueur du câble n'est pas ajustable, la longueur souhaitée doit être spécifiée.

SPECIFICATION SPRODUIT	SCOUT 4048/4049-XX	MINI MUTE 4258-16	MILL 4277D-14	BLOOM 4269-XX	CELESTE 4010-CEL1	MIKA 3230-8
PERFORMANCE						
PUISSANCE TOTALE	7.8 W DC	11.2 W DC	7.8 W DC	8 W DC	8.9 W DC	8 W DC
LUMENS RÉELS (4000K)	855 LM	707 LM	593 LM	605 TO 797 LM	534 LM	806 LM
EFFICACITÉ	109.6 LM/W	63 LM/W	76 LM/W	75.6 TO 99.6 LM/W	60 LM/W	100.75 LM/W
AUTRES INFORMATIONS						
POIDS	MAX 6.05 LBS / 2.65 KG	5.83 LBS / 2.65 KG	11.3 LBS / 4.9 KG	MAX 9.75 LBS / 4.43KG	2.2 LBS / 1 KG	2.2 LBS / 1 KG
L70 (LUMEN MAINTENANCE)	63,000 HRS	60,000 HRS	63,600 HRS	55,000 HRS	60,000 HRS	55,000 HRS
CRITÈRES DE CERTIFICATION WELL & LEED (VOIR FICHE TECHNIQUE DU PRODUIT)						

FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
80+	4000K	1.00
80+	3500K	0.98
80+	3000K	0.94
80+	2700K	0.91
90+	4000K	0.88
90+	3500K	0.85
90+	3000K	0.81
90+	2700K	0.77

DISTRIBUTION LUMINEUSE

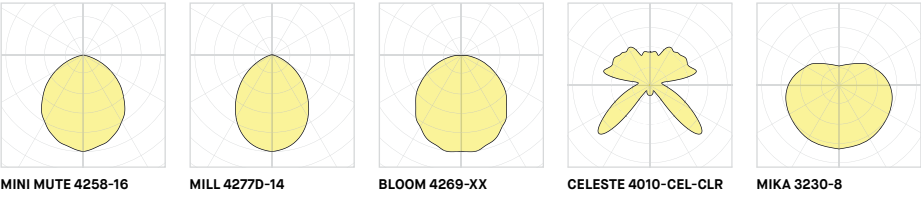

US


5 ans de garantie

Visitez notre site Web pour les termes et conditions.

Configure Arena in two easy steps


1

Choose your **Arena** options



2

Configure **light sources** and
accessories as needed

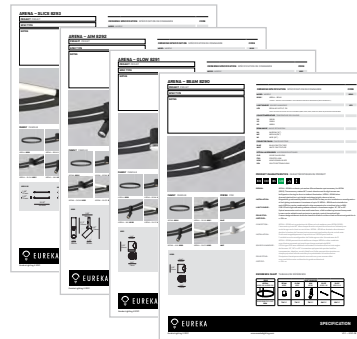

Our Arena-Ring favorites



1 × ARENA 54"
6 × ARENA – AIM
LUMEN OUTPUT TOTAL - 3936lm



1 × ARENA 54"
12 × ARENA – BEAM
LUMEN OUTPUT TOTAL - 10 656lm



1 × ARENA 54"
12 × ARENA – GLOW
LUMEN OUTPUT TOTAL - 11 244lm



1 × ARENA 54"
4 × ARENA – SLICE ROUND 54"
LUMEN OUTPUT TOTAL - 7072lm



1 × ARENA 54"
2 × ARENA – SLICE ROUND 54"
6 × ARENA – AIM
LUMEN OUTPUT TOTAL - 7472lm



1 × ARENA 54"
2 × ARENA – SLICE ROUND 54"
2 × ARENA – GLOW
LUMEN OUTPUT TOTAL - 5410lm

Our Arena-Square & Rectangle favorites



1 × ARENA – SQUARE 36X36"
4 × ARENA – AIM
2 × ARENA – SLICE SQUARE 36"
LUMEN OUTPUT TOTAL - 3780lm DIRECT / 1156lm INDIRECT



1 × ARENA – SQUARE 36X36"
4 × ARENA – BALL
6 × ARENA – BEAM
LUMEN OUTPUT TOTAL - 8040lm



1 × ARENA – SQUARE 36X36"
6 × ARENA – GLOW
4 × ARENA – ACOUSTIC 40"
LUMEN OUTPUT TOTAL - 5622lm



1 × ARENA – RECTANGLE 36X54"
4 × ARENA – SLICE SQUARE 54"
LUMEN OUTPUT TOTAL - 3458lm DIRECT / 3458lm INDIRECT



1 × ARENA – RECTANGLE 36X54"
8 × ARENA – CONE
LUMEN OUTPUT TOTAL - 6981lm



1 × ARENA – SQUARE 54X96"
6 × ARENA – SLICE SQUARE 54"
12 × ARENA – ACOUSTIC 58"
LUMEN OUTPUT TOTAL - 10 374lm

Our Arena-Straight favorites



1 × ARENA – STRAIGHT 54"
8 × ARENA – BALL
LUMEN OUTPUT TOTAL - 5424lm



1 × ARENA – STRAIGHT 54"
5 × ARENA – CONE
LUMEN OUTPUT TOTAL - 3390lm



1 × ARENA – STRAIGHT 54"
6 × ARENA – AIM
10 × ARENA – ACOUSTIC 40"
LUMEN OUTPUT TOTAL - 3936lm



1 × ARENA – STRAIGHT 54"
8 × ARENA – GLOW
LUMEN OUTPUT TOTAL - 7496lm






2 × ARENA – STRAIGHT 96"
6 × ARENA – SLICE SQUARE 54"
LUMEN OUTPUT TOTAL - 5187lm DIRECT / 5187lm INDIRECT



1 × ARENA – STRAIGHT 54" / 4 × ARENA – ACOUSTIC 40"
6 × ARENA – BEAM / 4 × ARENA – ACOUSTIC 58"
LUMEN OUTPUT TOTAL - 5328lm

Arena Mapping



MIXING LIGHT SOURCES IS POSSIBLE AND RECOMMENDED. TO HELP YOU DO SO, SUBSTRACT THE DC LOAD OF EACH LIGHT SOURCE FROM THE MAXIMUM DC LOAD OF ARENA.
DO NOT EXCEED MAXIMUM WEIGHT PER SIDE

LUMINAIRE	ARENA RING	ARENA SQUARE	ARENA SQUARE	ARENA STRAIGHT	ARENA STRAIGHT
	8200	8220	8220	8210	8210
FRAME CONFIGURATION					
MAXIMUM TOTAL DC LOAD OF ACCESSORY	90W DC	90W DC	180W (90W DC PER 2 SIDES)	90W DC	180W (90W DC PER SIDE)
MAXIMUM TOTAL WEIGHT OF ACCESSORY	25 LBS	25 LBS / SIDE	25 LBS / SIDE	25 LBS / SECTION	25 LBS / SECTION
CONFIGURATION SIZE	8200-36 8200-54	8220-36X36 8220-36X54 8220-54X54 8220-36X96 8220-54X96 8220-96X96		8210-36 (1 SECTION) 8210-54 (1 SECTION) 8210-70 (2 SECTIONS) 8210-96 (1 SECTION) 8210-158 (3 SECTIONS) 8210-190 (2 SECTIONS)	

ACCESSORIES HEAD	BEAM	GLOW	AIM	CONE	BALL
	8290	8291	8292	8294	8295
LIGHT SOURCES					
DC LOAD	7W DC	7W DC	7.7W DC	12.9W DC	9.3W DC
WEIGHT LBS	0.62 LBS	0.70 LBS	0.61 LBS	0.88 LBS	0.48 LBS

ACCESSORIES SLICE	SLICE-ROUND 8293 (ONLY FOR 8200)		SLICE-SQUARE 8296	
	8293-36	8293-54	8296-36	8296-54
LIGHT SOURCES				
DC LOAD	6W DC	9W DC	7.5W DC	11.2W DC
WEIGHT LBS	1.24 LBS	1.65 LBS	1.24 LBS	1.65 LBS

ACCESSORIES ADAPTER	MILL 14"	SCOUT Ø2.75"	SCOUT Ø4"	MIKA 8"	BLOOM	MINI MUTE	CELESTE
	4277D-14	4048-XX	4049-XX	4230-8	4269-XX	4258-16	4010-CEL1
LIGHT SOURCES							
DC LOAD	7.8W DC	7.8W DC	7.8W DC	8W DC	8W DC	11.2W DC	8.9W DC
WEIGHT LBS	11.3 LBS	MAX 4.32 LBS	MAX 6.05 LBS	2.40 LBS	MAX 9.75 LBS	5.83 LBS	2.20 LBS

ACCESSORIES ACOUSTIC	ACOUSTIC BAFFLE FOR ARENA SQUARE		ACOUSTIC BAFFLE FOR ARENA STRAIGHT	
	8297-40	8297-58	8298-40	8298-58
ACOUSTIC CONFIGURATION				
WEIGHT LBS	1.38 LBS / PANEL	1.63 LBS / PANEL	1.38 LBS / PANEL	1.63 LBS / PANEL
CONFIGURATION USE FOR ARENA	8220-36X36 8220-36X54 8220-36X96	8220-54X54 8220-36X54 8220-54X96	8210-XX	8210-XX

*WE RESERVE THE RIGHT TO MODIFY ANY INFORMATION AT ANY TIME.

ARENA 8200

PROJECT PROJÉT
SPEC TYPE
NOTES



FAMILY FAMILLE



ARENA - BEAM 8290



ARENA - GLOW 8291

FINISH FINI



BLKE



ARENA - SLICE 8293





ARENA - AIM 8292



WHE

MOUNTING OPTIONS OPTIONS DE MONTAGE

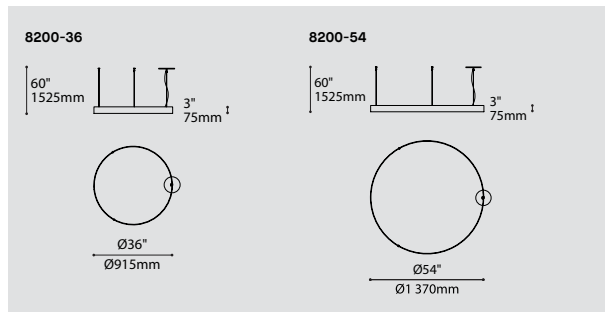

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE

8200-36 ARENA 36"
8200-54 ARENA 54"

MAXIMUM DC LOAD PUISSANCE MAXIMALE DC

90W 90 WATT DC

TOTAL DC LOAD OF INSTALLED LIGHT SOURCES (8290, 8291, 8292, 8293-36, 8293-54) MUST NOT EXCEED 90W.

RING
ARENA 8200-36 & 8200-54
MAXIMUM DC LOAD 90W

LIGHT SOURCES				
BEAM 8290	GLOW 8291	AIM 8292	SLICE 8293-36	SLICE 8293-54
7W DC	7W DC	7W DC	6W DC	9W DC

VOLTAGE VOLTAGE

120V 120 VOLT
277V 277 VOLT

CONTROL OPTION OPTION DE CONTRÔLE

DV 0-10V DIMMING (120V-277V)
NLTAIR2* NLIGHT AIR CONTROL GEN 2
NLIGHT* NLIGHT WIRED CONTROL

LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT
*NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAA & 39NLWA AS BELOW FOR NLIGHT).
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.

DRIVER POSITION POSITION DE L'ALIMENTATION

RDP * RECESSED DRIVER
* 3981C IS REQUIRED

CABLE CÂBLE

AC AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE

CABLE LENGTH LONGUEUR DE CÂBLE

60 60" AIRCRAFT CABLE (STD LENGTH)
** CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

MOUNTING MONTAGE

RC1 ROUND CANOPY ON JBOX FOR RECESSED DRIVERS 0.5" (2475C)
RC2 ROUND SURFACE SCREWLESS CANOPY 1.87" (2475I)
RC3 ROUND SURFACE SCREWLESS CANOPY FOR REMOTE DRIVER BOX 0.50" (2471C)
* PAIR WITH ACCESSORY 3981G

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

IF NO OPTION IS SELECTED, AN OFF-CENTERED ROUND CANOPY WITH STRAIGHT AIRCRAFT CABLES IS STANDARD

RCC CENTERED ROUND CANOPY - STRAIGHT AIRCRAFT CABLES

CANOPY FINISH FINI PAVILLON

BLKE BLACK FINE TEXTURE
WHE WHITE FINE TEXTURE

POWER CORD FINISH FINI CÂBLE D'ALIMENTATION

BLK BLACK POWER CORD
WH WHITE POWER CORD
CLR CLEAR POWER CORD

RING FINISH FINI DE L'ANNEAU

BLKE BLACK FINE TEXTURE
WHE WHITE FINE TEXTURE

ACCESSORY ACCESSOIRE

3981C JUNCTION BOX FOR RECESSED DRIVER OPTION SQ1 OR RC1
3981G REMOTE DRIVER BOX FOR MOUNTING RC3
39NLAA* NLIGHT AIR GEN 2 REMOTE CONTROLLER
39NLWA* NLIGHT WIRED REMOTE CONTROLLER
* FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.




SPECIFICATION

ARENA 8200-XX

EVOLVING LIGHT

ARENA is the circular base profile that supports and powers a variety of compatible lightsources which can be combined and positioned as desired.


The ARENA will accommodate a choice of lightsources which can be customized in quantity, position, orientation and combinations to provide users with a tailored solution for their space.

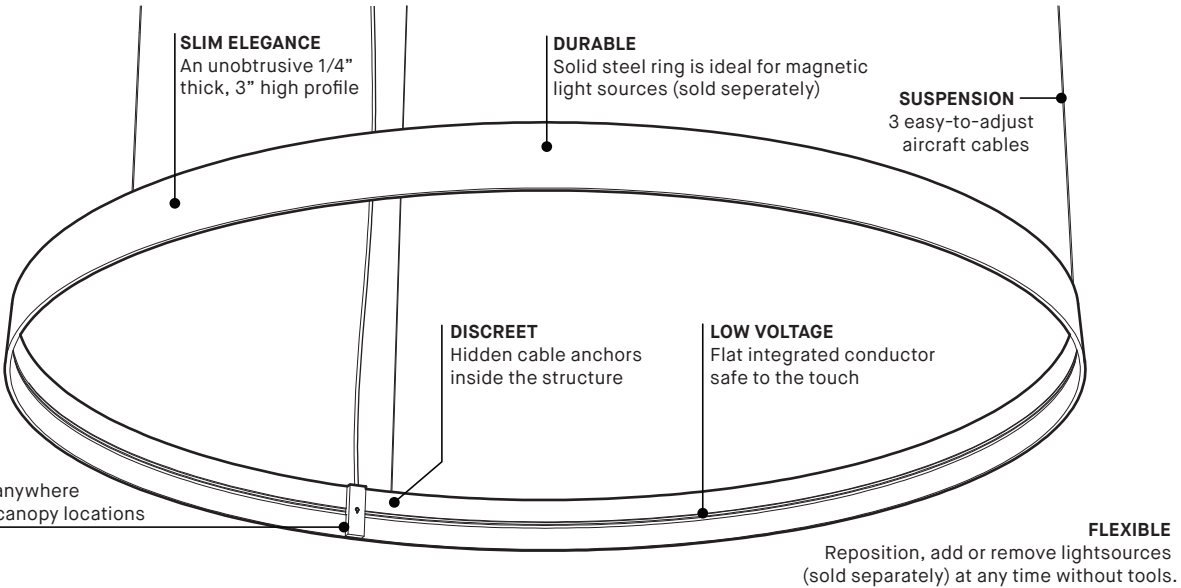

RELOCATE


Easily relocated power feed to anywhere around the ring for flexibility in canopy locations

SIZES




2 sizes allow multiple combinations for a variety of spaces

CANOPY POSITION



Standard (fixed location)
Centered with mounting point




RCC (flexible location)
Independant from the mounting point

CANOPY TYPE



STANDARD CANOPY 9.4"X1.88"
Mounting on a 4" standard j-box






LOW PROFILE CANOPY 9.4"X0.25"
Mounting on Eureka box 3981C (sold separately, can be shipped and installed in advance)
Recessed driver for discreet installation
Min. 3.5" inside ceiling clearance required

LIGHT SOURCES :

Several light source accessories are available for ARENA. They are sold separately in the quantity and type desired. Different types can be combined

Please refer to their individual product pages for more information



PRODUCT SPECIFICATION	8200-36	8200-54
PERFORMANCE		
MAXIMUM DC LOAD	90 W	90 W
LIGHT SOURCES (SOLD SEPERATELY)	REFER TO 8290, 8291, 8292, 8293	REFER TO 8290, 8291, 8292, 8293
OTHER INFORMATION		
LUMINAIRE'S WEIGHT	24 LBS / 11 KG (MAX. 35 LBS / 16 KG WITH 12 LIGHT SOURCES)	40 LBS / 18 KG (MAX. 52 LBS / 24 KG WITH 12 LIGHT SOURCES)



Visit our website for warranty terms and conditions.

ARENA 8200-XX

LUMIÈRE ÉVOLUTIVE

ARENA est la base circulaire qui supporte et alimente une variété de sources lumineuses compatibles pouvant être combinées et positionnées selon vos désirs

ARENA accommodera un choix de sources lumineuses pouvant être personnalisées en quantité, position, orientation et combinaison afin de permettre à l'utilisateur une solution adaptée à l'espace

RELOCALISEZ

Source d'alimentation amovible pouvant être relocalisée sur l'anneau afin d'accommoder la localisation du pavillon

MINCE ET ÉLÉGANT

Un profil discret de 1/4" par 3" de hauteur

DURABLE

L'anneau d'acier est idéal pour accueillir les sources lumineuses magnétiques (vendues séparément)

SUSPENSION

3 câbles d'acier facile à ajuster

DISCRET

La fixation des câbles est dissimulée dans la structure


BAS VOLTAGE

Le conducteur plat intégré est sécuritaire au toucher

FLEXIBLE


Repositionnez, ajoutez ou retirez des sources lumineuses (vendues séparément) en tout temps et sans outils.

TAILLES



2 tailles
Permettent une multitude de combinaisons pour une variété d'espaces.

POSITION DU PAVILLON



Standard

(location fixe)
Centré avec un point de montage

RCC


(location flexible)
Indépendant du point de montage

TYPE DE PAVILLON



PAVILLON STANDARD 9.4"X1.88"

Installation sur une boîte de jonction 4" standard




PAVILLON BAS PROFILE 9.4"X0.25"

Installation sur une boîte Eureka 3981C (vendue séparément, peut être livrée séparément pour une installation en avance)
Jeu de 3.5" minimum dans le plafond requis

SOURCES LUMINEUSES :

Plusieurs accessoires lumineux sont disponibles pour ARENA. Vendues séparément dans la quantité et le type désiré. Les modèles peuvent être combinés


Se référer aux pages individuelles des produits pour plus d'information




ARENA-BEAM 8290



ARENA-GLOW 8291



ARENA-AIM 8292



ARENA-SLICE 8293

SPÉCIFICATION PRODUIT

8200-36

8200-54

PERFORMANCE

PUISSANCE MAXIMALE DC

90 W

90 W

SOURCES LUMINEUSES

VOIR 8290, 8291, 8292,

VOIR 8290, 8291, 8292,

(VENDUES SÉPARÉMENT)

8293

8293

AUTRES INFORMATION

POIDS DU LUMINAIRE

24 LBS / 11 KG

40 LBS / 18 KG

(MAX. 35 LBS / 16 KG AVEC

(MAX. 52 LBS / 24 KG AVEC

12 SOURCES LUMINEUSES)

12 SOURCES LUMINEUSES)



Visitez notre site Web pour les termes et conditions.




DONNÉES TECHNIQUES

ARENA STRAIGHT 8210


PROJECT PROJCT

SPEC TYPE

NOTES

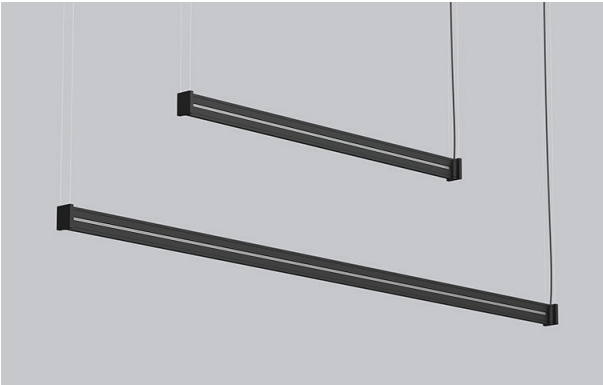


FINISH FINI




FAMILY FAMILLE



MOUNTING OPTION OPTION DE MONTAGE

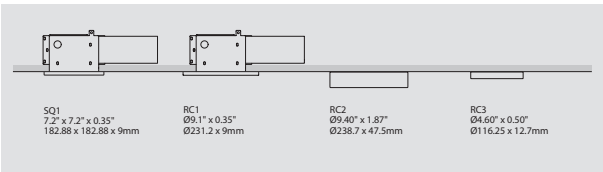

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

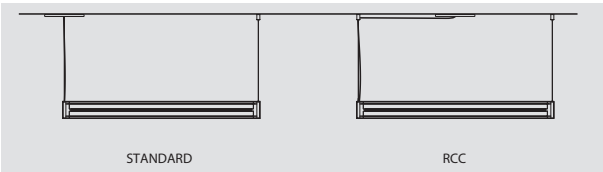

ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE		CODE					
STANDARD MODEL MODÈLE STANDARD									
8210-36	ARENA STRAIGHT 36"								
8210-54	ARENA STRAIGHT 54"								
8210-70	ARENA STRAIGHT 70" (2 SECTIONS CONNECTED WITH A JOINER)								
8210-96	ARENA STRAIGHT 96"								
8210-158	ARENA STRAIGHT 158" (3 SECTIONS CONNECTED WITH JOINERS)								
8210-190	ARENA STRAIGHT 190" (2 SECTIONS CONNECTED WITH A JOINER)								
DC LOAD PUISSANCE MAXIMALE DC									
90W	90 WATT DC								
180W	2X 90 WATT DC								
ARENA		LIGHT SOURCES							
STRAIGHT 8210		BEAM 8290	GLOW 8291	AIM 8292	SLICE-SQ 8296-36	SLICE-SQ 8296-54	BALL 8295	CONE 8294	ADAPTER TAA
									
MAXIMUM DC LOAD 90W OR 180W		7W DC	7W DC	7W DC	7.5W DC	11.2W DC	9.2W DC	12.9W DC	SEE SPEC SHEET
MAXIMUM TOTAL WEIGHT PER SECTION 25 LBS		0.62 LBS	0.70 LBS	0.61 LBS	1.24 LBS	1.65 LBS	0.48 LBS	0.88 LBS	
VOLTAGE VOLTAGE									
120V	120 VOLT								
277V	277 VOLT								
CONTROL OPTIONS OPTION DE CONTRÔLE									
DV	0-10V DIMMING (120V-277V)								
NLTAIR2*	NLIGHT AIR CONTROL GEN2								
NLIGHT*	NLIGHT WIRED CONTROL								
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT								
	*NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAA & 39NLWA AS BELOW FOR NLIGHT).								
	REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.								
CABLE CÂBLE		AC							
AC	AIRCRAFT CABLE & POWER CORD, FIELD ADJUSTABLE								
CABLE LENGTH LONGUEUR DE CÂBLE									
60	60" AIRCRAFT CABLE (STD LENGTH)								
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)								
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.								
MOUNTING MONTAGE									
SQ1	SQUARE CANOPY ON JBOX FOR RECESSED DRIVERS 0.35" (2437B) (PAIR WITH ACCESSORY 3981C)								
RC1	ROUND CANOPY ON JBOX FOR RECESSED DRIVERS 0.35" (2405B) (PAIR WITH ACCESSORY 3981C)								
RC2	ROUND SURFACE SCREWLESS CANOPY 1.87" (2475I)								
RC3	ROUND SURFACE SCREWLESS CANOPY FOR REMOTE DRIVER BOX 0.50" (2471C)								
	(PAIR WITH ACCESSORY 3981G)								
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE									
RCC	CENTERED ROUND CANOPY – STRAIGHT AIRCRAFT CABLES								
	IF NO OPTION IS SELECTED, AN OFF-CENTERED ROUND CANOPY WITH AIRCRAFT CABLES IS STANDARD								
CANOPY & GRIPPERS FINISH FINI PAVILLON ET ATTACHES									
BLKE	BLACK FINE TEXTURE								
WHE	WHITE FINE TEXTURE								
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION									
BLK	BLACK POWER CORD								
WH	WHITE POWER CORD								
CLR	CLEAR POWER CORD								
FRAME FINISH FINI DU CADRE									
BLKE	BLACK FINE TEXTURE								
WHE	WHITE FINE TEXTURE								
ACCESSORY ACCESSOIRE									
3981C	JUNCTION BOX FOR RECESSED DRIVER OPTION SQ1 OR RC1								
3981G	REMOTE DRIVER BOX FOR MOUNTING RC3								
39NLAA*	NLIGHT AIR GEN 2 REMOTE CONTROLLER								
39NLWA*	NLIGHT WIRED REMOTE CONTROLLER								
		* FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE							

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




ARENA STRAIGHT 8210

CONFIGURATIONS


8210-36

ARENA STRAIGHT 36"




8210-54

ARENA STRAIGHT 54"




8210-70

ARENA STRAIGHT 70.4"

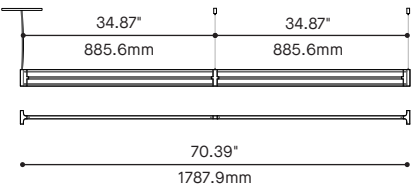


8210-96

ARENA STRAIGHT 96"

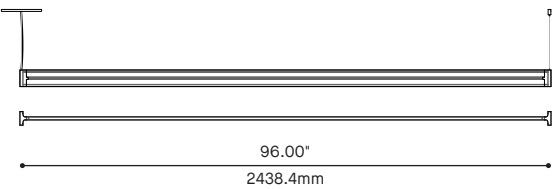


8210-158

ARENA STRAIGHT 158.78"

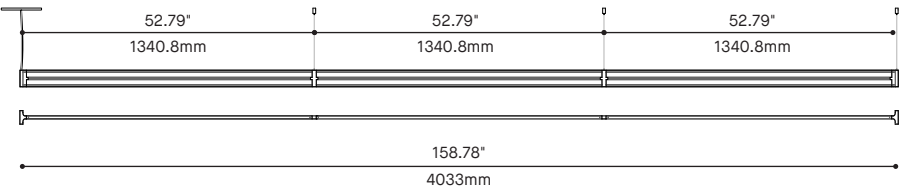


8210-190

ARENA STRAIGHT 190.39"

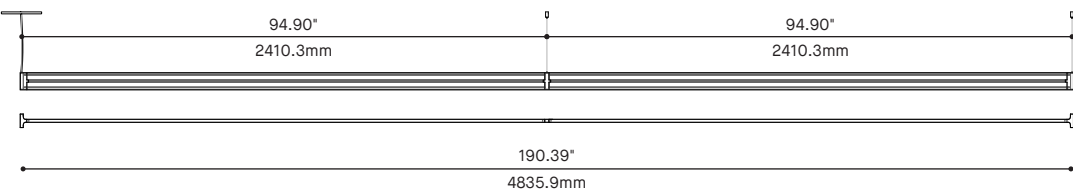


ARENA STRAIGHT 8210

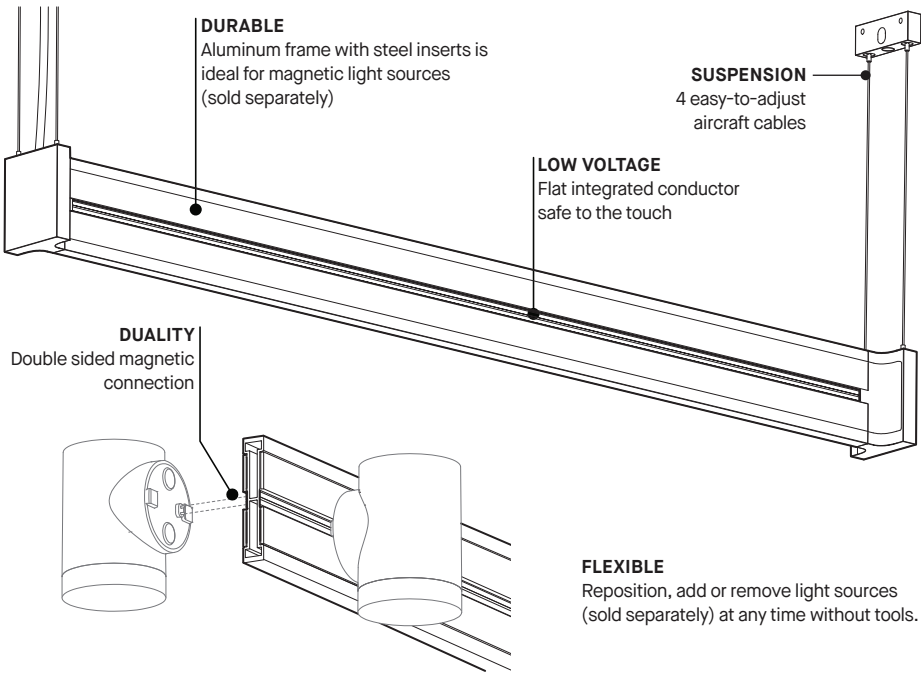


LIGHT SOURCES


Several light source accessories are available for ARENA. They are sold separately in the quantity and type desired. Different types can be combined. Please refer to their individual product pages for more information.

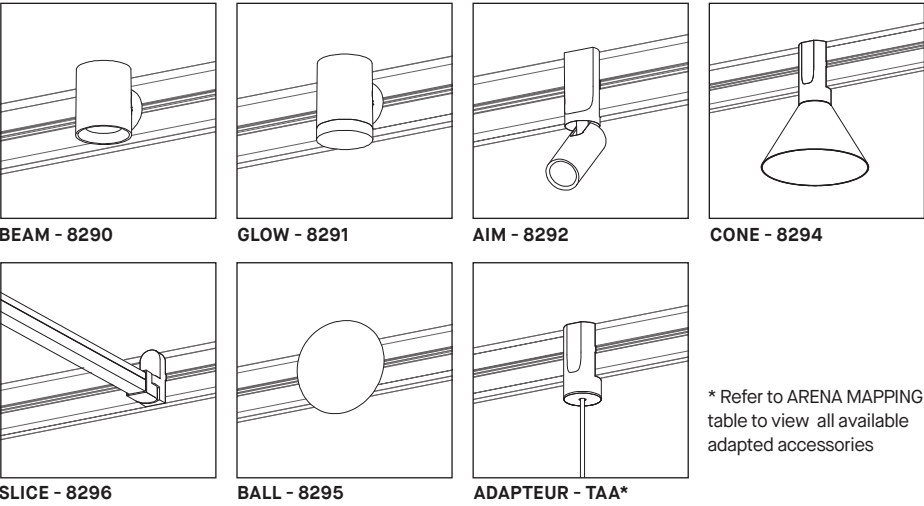


SIZES

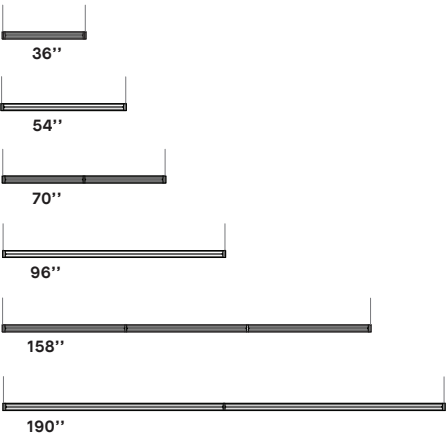

CANOPY POSITION

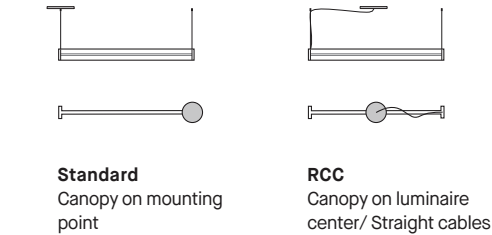


CANOPY TYPE

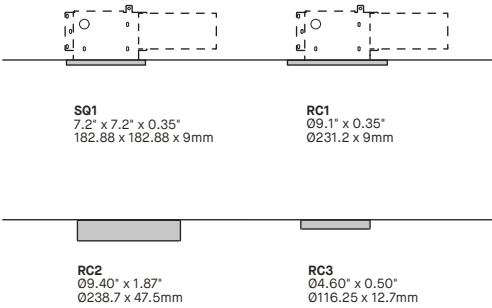


PRODUCT SPECIFICATIONS	8210-36	8220-54	8220-70	8220-96	8220-158	8220-190
ACCESSORIES QUANTITY						
MAX TOTAL DC LOAD OF ACCESSORIES	90W / 180W	90W / 180W	90W / 180W	90W / 180W	90W / 180W	90W / 180W
MAX TOTAL WEIGHT OF ACCESSORIES	25 LBS / 11.3 KG	25 LBS / 11.3 KG	50 LBS / 22.6 KG	25 LBS / 11.3 KG	50 LBS / 22.6 KG	50 LBS / 22.6 KG
* Refer to installation sheets for weight per configuration.						
OTHER INFORMATION						
PRODUCT WEIGHT (WITHOUT ACCESSORIES)	5.1 LBS / 2.3 KG	7.6 LBS / 3.45 KG	9.85 LBS / 4.47 KG	13,51 LBS / 6.13 KG	22,24 LBS / 10.1 KG	26.76 LBS / 12.14 KG




ARENA STRAIGHT 8210

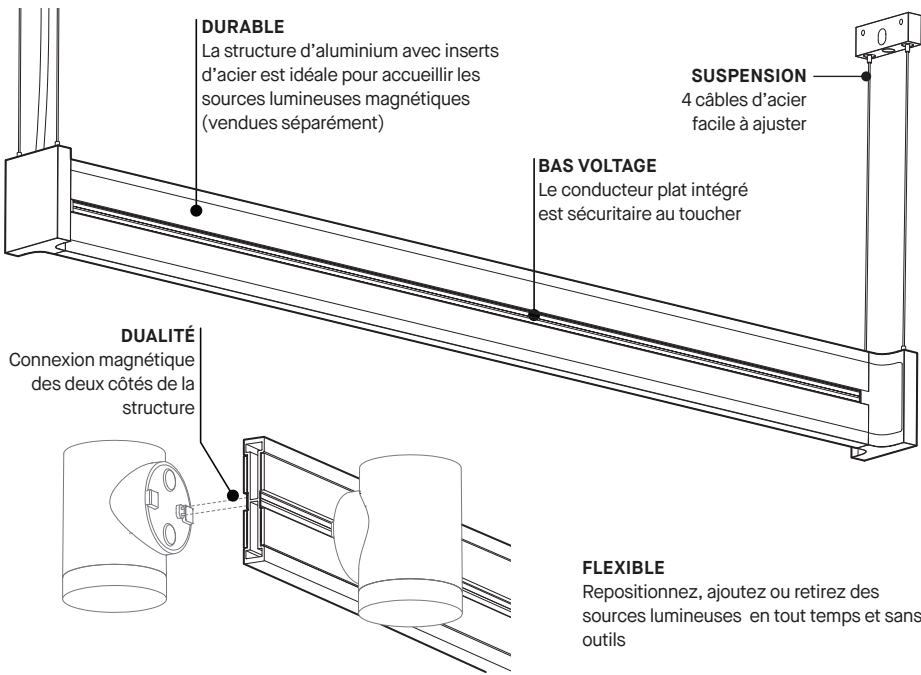

TAILLES

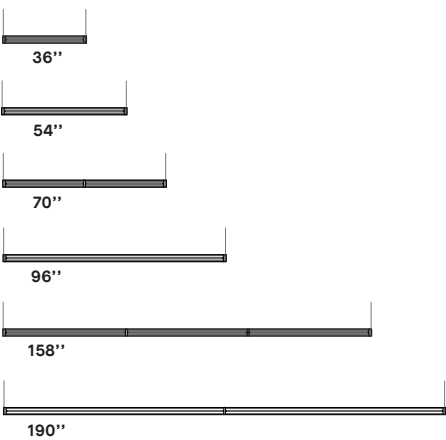

POSITION DU PAVILLON




Standard

Pavillon au point de montage

RCC


Pavillon centré sur le luminaire

TYPE DE PAVILLON

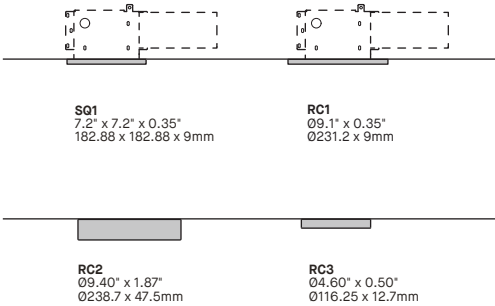

SOURCES LUMINEUSES

Plusieurs accessoires sont disponibles pour ARENA. Il sont vendus séparément dans la quantité et le type désirés. Les modèles peuvent être combinés. Se référer aux pages individuelles des accessoires pour plus d'information.

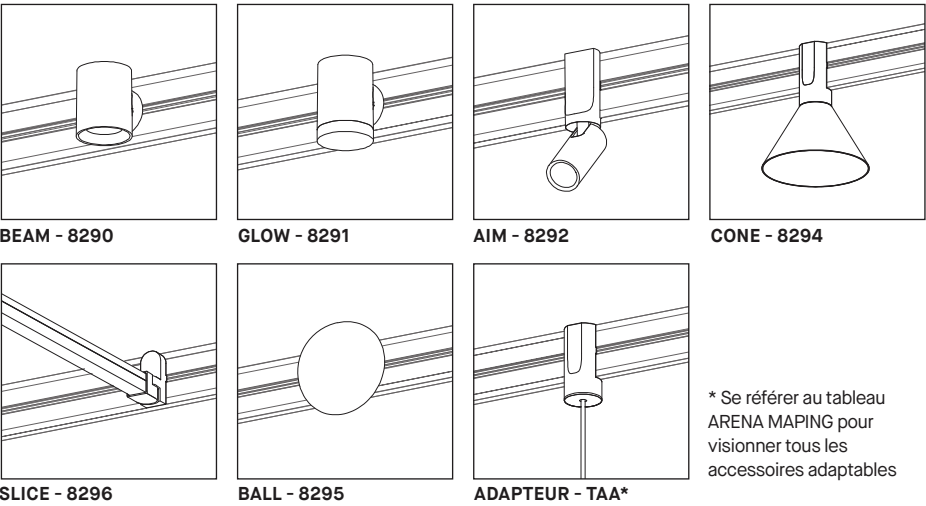

* Se référer au tableau ARENA MAPING pour visionner tous les accessoires adaptables

SPÉCIFICATIONS PRODUIT

QUANTÉ D'ACCESSOIRES

PUISSANCE TOTALE MAX. DES ACCESSOIRES	90W / 180W	90W / 180W	90W / 180W	90W / 180W	90W / 180W	90W / 180W
POIDS TOTAL MAX. DES ACCESSOIRES	25 LBS / 11.3 KG	25 LBS / 11.3 KG	50 LBS / 22.6 KG	25 LBS / 11.3 KG	50 LBS / 22.6 KG	50 LBS / 22.6 KG

* Se référer à la fiche d'installation pour les configurations de poids.

AUTRE INFORMATION

POIDS DU PRODUIT (SANS ACCESSOIRES)	5.1 LBS / 2.3 KG	7.6 LBS / 3.45 KG	9.85 LBS / 4.47 KG	13.51 LBS / 6.13 KG	22.24 LBS / 10.1 KG	26.76 LBS / 12.14 KG
-------------------------------------	------------------	-------------------	--------------------	---------------------	---------------------	----------------------



Visitez notre site Web pour les termes et conditions.



DONNÉES TECHNIQUES

ARENA SQUARE & RECTANGLE 8220


PROJECT PROJCT

SPEC TYPE

NOTES




FINISH FINI




FAMILY FAMILLE




MOUNTING OPTION OPTION DE MONTAGE

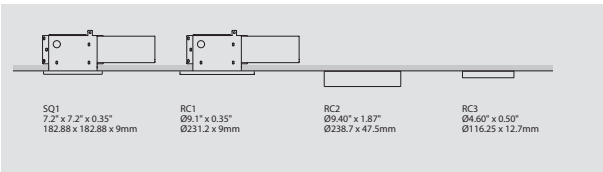

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

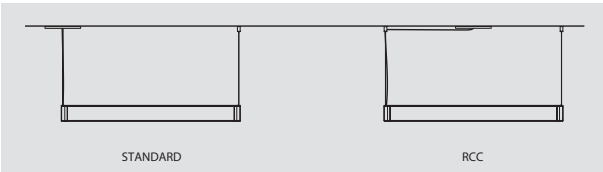

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE																															
STANDARD MODEL MODÈLE STANDARD																																	
8220-36X36	ARENA SQUARE 36X36"																																
8220-54X54	ARENA SQUARE 54X54"																																
8220-96X96	ARENA SQUARE 96X96"																																
8220-36X54	ARENA RECTANGLE 36X54"																																
8220-36X96	ARENA RECTANGLE 36X96"																																
8220-54X96	ARENA RECTANGLE 54X96"																																
DC LOAD PUISSANCE MAXIMALE DC																																	
90W	90 WATT DC																																
180W	90 WATT DC PER 2 SIDES																																
ARENA SQUARE 8220  MAXIMUM DC LOAD 90W OR 180W MAXIMUM TOTAL WEIGHT PER SECTION 25 LBS		LIGHT SOURCES <table><thead><tr><th>BEAM 8290</th><th>GLOW 8291</th><th>AIM 8292</th><th>SLICE-SQ 8296-36</th><th>SLICE-SQ 8296-54</th><th>BALL 8295</th><th>CONE 8294</th><th>ADAPTER TAA</th></tr></thead><tbody><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7W DC</td><td>7W DC</td><td>7W DC</td><td>7.5W DC</td><td>11.2W DC</td><td>9.2W DC</td><td>12.9W DC</td><td rowspan="2">SEE SPEC SHEET</td></tr><tr><td>0.62 LBS</td><td>0.70 LBS</td><td>0.61 LBS</td><td>1.24 LBS</td><td>1.65 LBS</td><td>0.48 LBS</td><td>0.88 LBS</td></tr></tbody></table>	BEAM 8290	GLOW 8291	AIM 8292	SLICE-SQ 8296-36	SLICE-SQ 8296-54	BALL 8295	CONE 8294	ADAPTER TAA									7W DC	7W DC	7W DC	7.5W DC	11.2W DC	9.2W DC	12.9W DC	SEE SPEC SHEET	0.62 LBS	0.70 LBS	0.61 LBS	1.24 LBS	1.65 LBS	0.48 LBS	0.88 LBS
BEAM 8290	GLOW 8291	AIM 8292	SLICE-SQ 8296-36	SLICE-SQ 8296-54	BALL 8295	CONE 8294	ADAPTER TAA																										
																																	
7W DC	7W DC	7W DC	7.5W DC	11.2W DC	9.2W DC	12.9W DC	SEE SPEC SHEET																										
0.62 LBS	0.70 LBS	0.61 LBS	1.24 LBS	1.65 LBS	0.48 LBS	0.88 LBS																											
VOLTAGE VOLTAGE																																	
120V	120 VOLT																																
277V	277 VOLT																																
CONTROL OPTIONS OPTION DE CONTRÔLE																																	
DV	0-10V DIMMING (120V-277V)																																
NLTAIR2*	NLIGHT AIR CONTROL GEN2																																
NLIGHT*	NLIGHT WIRED CONTROL																																
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT																																
	*NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAA & 39NLWA AS BELOW FOR NLIGHT).																																
	REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.																																
CABLE CÂBLE		AC																															
AC	AIRCRAFT CABLE & POWER CORD, FIELD ADJUSTABLE																																
CABLE LENGTH LONGUEUR DE CÂBLE																																	
60	60" AIRCRAFT CABLE (STD LENGTH)																																
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)																																
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.																																
MOUNTING MONTAGE																																	
SQ1	SQUARE CANOPY ON JBOX FOR RECESSED DRIVERS 0.35" (2437B) (PAIR WITH ACCESSORY 3981C)																																
RC1	ROUND CANOPY ON JBOX FOR RECESSED DRIVERS 0.35" (2405B) (PAIR WITH ACCESSORY 3981C)																																
RC2	ROUND SURFACE SCREWLESS CANOPY 1.87" (2475I)																																
RC3	ROUND SURFACE SCREWLESS CANOPY FOR REMOTE DRIVER BOX 0.50" (2471C) (PAIR WITH ACCESSORY 3981X)																																
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE																																	
RCC	CENTERED ROUND CANOPY – STRAIGHT AIRCRAFT CABLES																																
	IF NO OPTION IS SELECTED, AN OFF-CENTERED ROUND CANOPY WITH AIRCRAFT CABLES IS STANDARD																																
CANOPY & GRIPPERS FINISH FINI PAVILLON ET ATTACHES																																	
BLKE	BLACK FINE TEXTURE																																
WHE	WHITE FINE TEXTURE																																
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION																																	
BLK	BLACK POWER CORD																																
WH	WHITE POWER CORD																																
CLR	CLEAR POWER CORD																																
FRAME FINISH FINI DU CADRE																																	
BLKE	BLACK FINE TEXTURE																																
WHE	WHITE FINE TEXTURE																																
ACCESSORY ACCESSOIRE																																	
3981C	JUNCTION BOX FOR RECESSED DRIVER OPTION																																
3981G	REMOTE DRIVER BOX FOR MOUNTING RC3																																
39NLAA*	NLIGHT AIR GEN 2 REMOTE CONTROLLER																																
39NLWA*	NLIGHT WIRED REMOTE CONTROLLER																																
* FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE																																	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




SPECIFICATION


ARENA SQUARE & RECTANGLE 8220

CONFIGURATIONS


8220-36X36
ARENA SQUARE 36" x 36"

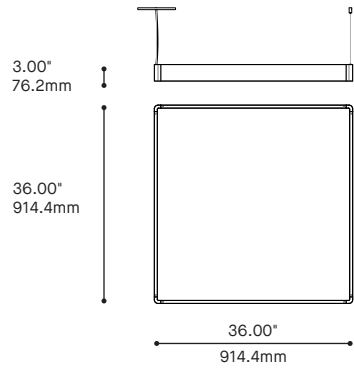


8220-36X96
ARENA RECTANGLE 36" x 96"

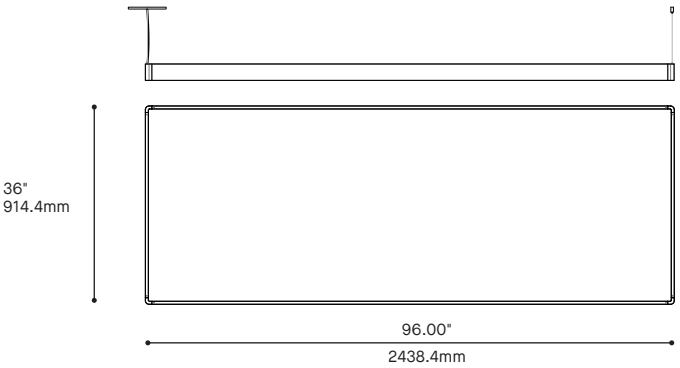


8220-54X54
ARENA SQUARE 54" x 54"

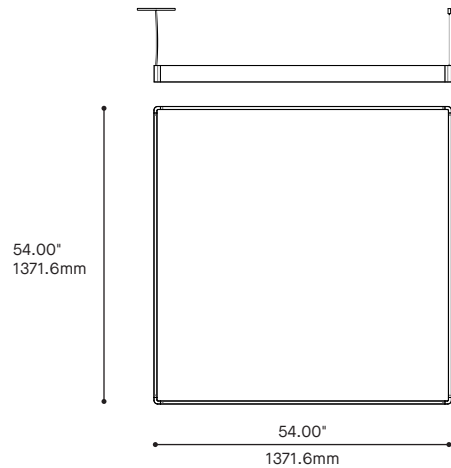


8220-54X96
ARENA RECTANGLE 54" x 96"

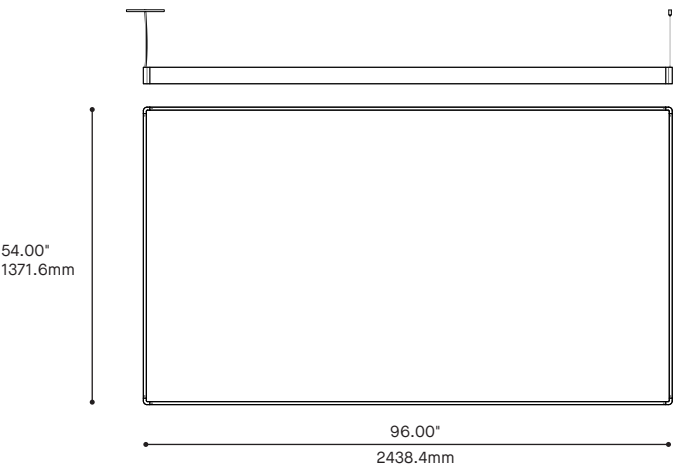


8220-96X96
ARENA SQUARE 96" x 96"

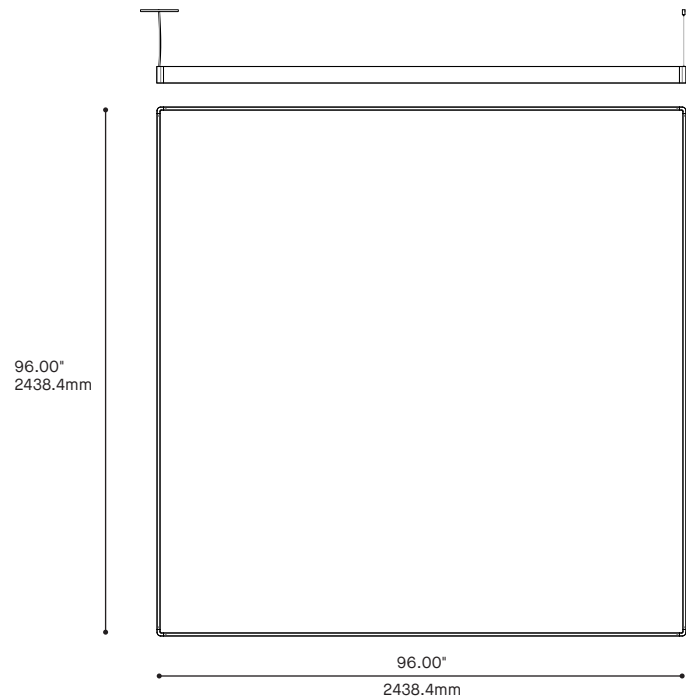

8220-36X54
ARENA RECTANGLE 36" x 54"

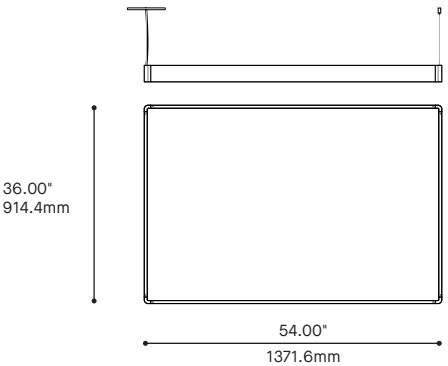


ARENA SQUARE & RECTANGLE 8220

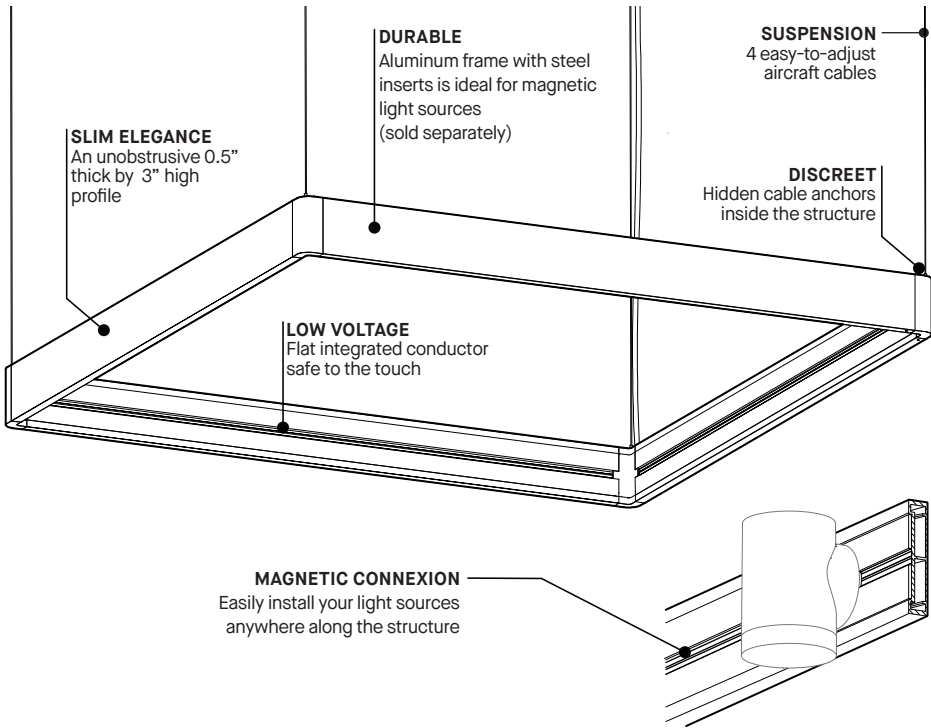


LIGHT SOURCES


Several light source accessories are available for ARENA. They are sold separately in the quantity and type desired. Different types can be combined. Please refer to their individual product pages for more information.

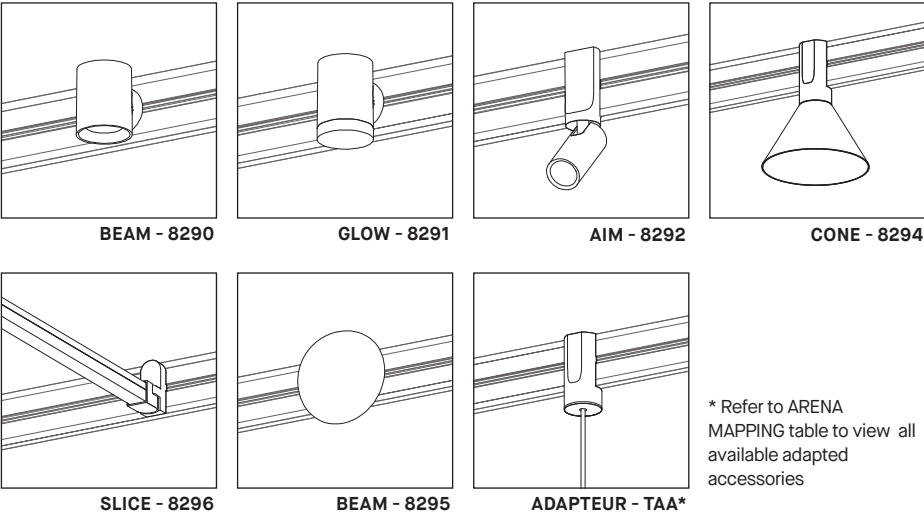


ARENA SQUARE

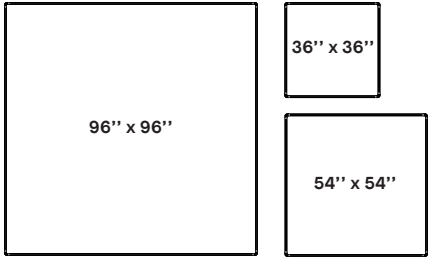


ARENA RECTANGLE

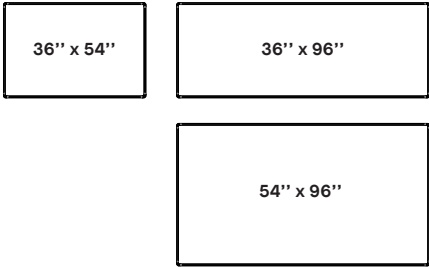

CANOPY POSITION

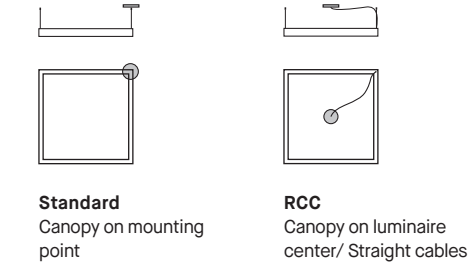

CANOPY TYPE

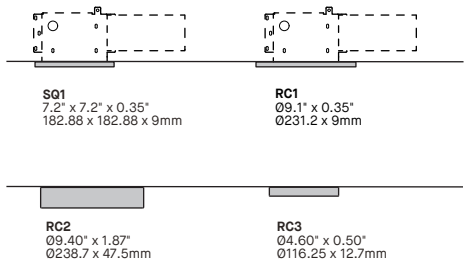


PRODUCT SPECIFICATIONS

	8220-36X36	8220-54X54	8220-96X96	8220-36X54	8220-36X96	8220-54X96
ACCESSORIES QUANTITY						
MAX TOTAL DC LOAD OF ACCESSORIES	90W / 180W	90W / 180W	90W / 180W	90W / 180W	90W / 180W	90W / 180W
MAX TOTAL WEIGHT OF ACCESSORIES (PER SIDE)	25 LBS / 11.3 KG	25 LBS / 11.3 KG	25 LBS / 11.3 KG	25 LBS / 11.3 KG	25 LBS / 11.3 KG	25 LBS / 11.3 KG
* Refer to installation sheets for weight per configuration.						
OTHER INFORMATION						
PRODUCT WEIGHT (WITHOUT ACCESSORIES)	12.72 LBS / 5.77 KG	19.05 LBS / 8.64 KG	33.86 LBS / 15.86 KG	15.87 LBS / 7.2 KG	23.28 LBS / 10.56 KG	26.46 LBS / 12 KG




Visit our website for warranty terms and conditions.

ARENA SQUARE & RECTANGLE 8220

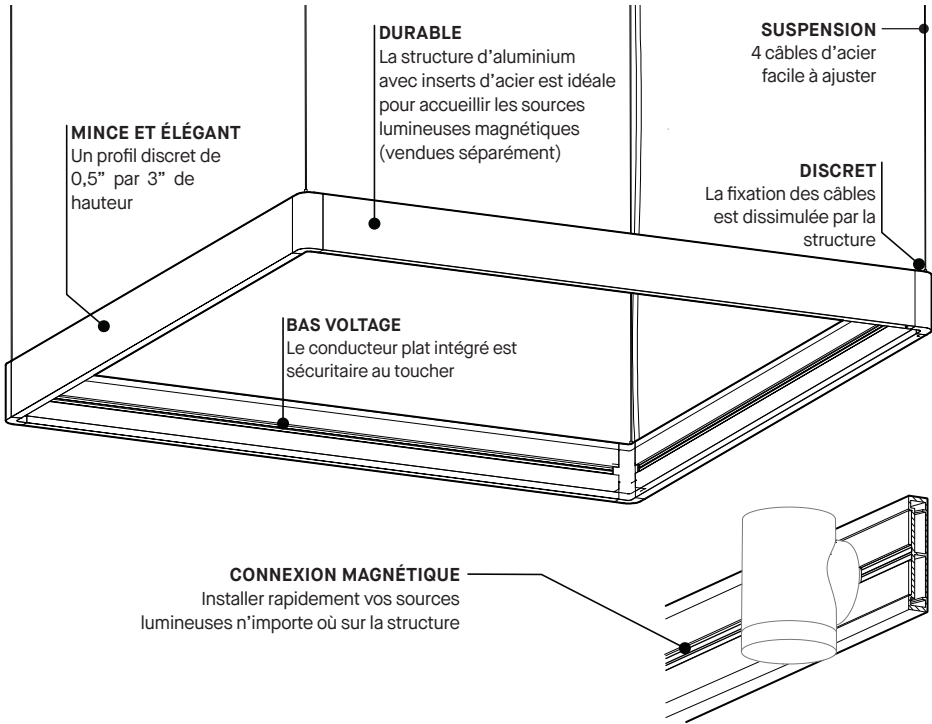


SOURCES LUMINEUSES


Plusieurs accessoires sont disponibles pour ARENA. Il sont vendus séparément dans la quantité et le type désirés. Les modèles peuvent être combinés. Se référer aux pages individuelles des accessoires pour plus d'information.

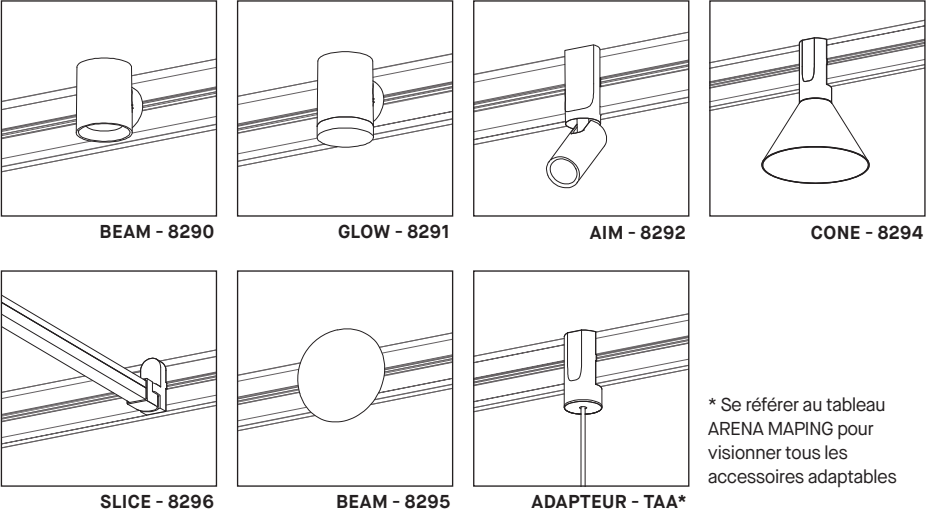


ARENA SQUARE

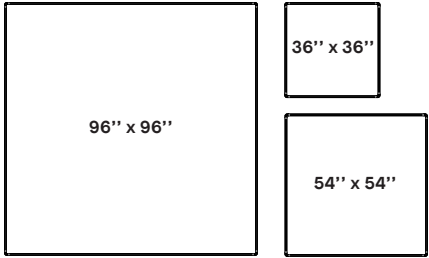


ARENA RECTANGLE

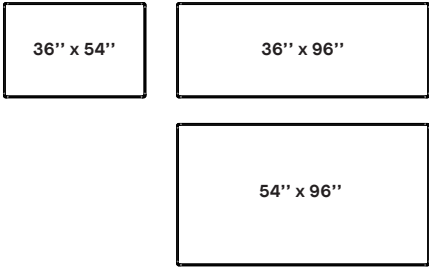

POSITION DU PAVILLON

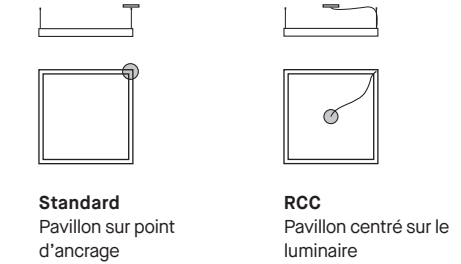

TYPE DE PAVILLON

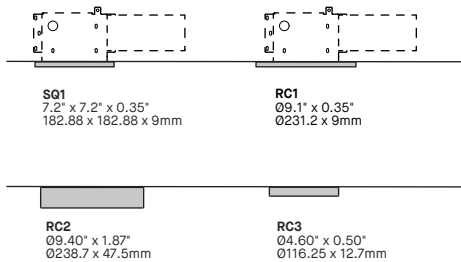

SPÉCIFICATIONS PRODUIT

QUANTITÉ D'ACCESSOIRES

PUISSANCE TOTALE MAX. DES ACCESSOIRES	90W / 180W	90W / 180W	90W / 180W	90W / 180W	90W / 180W	90W / 180W
POIDS TOTAL MAX. DES ACCESSOIRES (PAR CÔTÉ)	25 LBS / 11.3 KG	25 LBS / 11.3 KG	25 LBS / 11.3 KG	25 LBS / 11.3 KG	25 LBS / 11.3 KG	25 LBS / 11.3 KG

* Se référer à la fiche d'installation pour les configurations de poids.

AUTRE INFORMATION

POIDS DU PRODUIT (SANS ACCESSOIRES)	12.72 LBS / 5.77 KG	19.05 LBS / 8.64 KG	33.86 LBS / 15.86 KG	15.87 LBS / 7.2 KG	23.28 LBS / 10.56 KG	26.46 LBS / 12 KG
-------------------------------------	---------------------	---------------------	----------------------	--------------------	----------------------	-------------------



Visitez notre site Web pour les termes et conditions.