

BARE 4255-UFL

PROJECT PROJÉT

SPEC TYPE

NOTES



OVERALL HEIGHT HAUTEUR HORS TOUT

LIGHT SOURCE	INC TRACK 1 CIRCUIT	LED TRACK 1 CIRCUIT	INC	LED DIM -8W 277V
MOUNTING	2734B	2734F	2401E	2403G
CABLE	68.80"	70.45"	69.70"	70.20"


MOUNTING OPTIONS OPTIONS DE MONTAGE

2734B 1.46" x 1.36" 37 x 35mm	2734F 7.25" x 1.70" 37 x 35mm	2401E 0.450" x 1.00" Ø114 x 25mm	2403G 0.450" x 1.50" Ø114 x 38mm

* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS

STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

AC CABLE STD 60" 1523mm	
-------------------------------	--


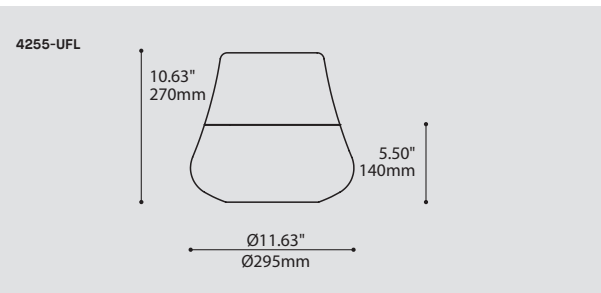


ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
MODEL MODÈLE		4255-UFL
4255-UFL	BARE	
LIGHT SOURCE SOURCE LUMINEUSE		
(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)		
INC.100		100W, INC, A19 / HAL T10, MEDIUM BASE (120V ONLY)
LED.4		4W, LED
LED.8		8W, LED
LED.18		18W, LED
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
FOR LED ONLY		
30		3000K
35		3500K
40		4000K
VOLTAGE VOLTAGE		
120V		120 VOLT
277V*		277 VOLT
*NOT AVAILABLE WITH A TRACK ADAPTOR		
DIMMING OPTION OPTION DE GRADATION		
FOR LED ONLY		
DV*		0-10V DIMMING (120-277V)
DP		PHASE DIMMING (120V ONLY)
LED DIMMING DRIVER IS STANDARD FOR LED.18, PLEASE SPECIFY YOUR DIMMING TYPE.		
*NOT AVAILABLE WITH A TRACK ADAPTOR		
CABLE CABLE		AC
AC		AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE
CABLE LENGTH LONGUEUR DE CABLE		
60		60" AIRCRAFT CABLE (STD LENGTH)
**		CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
MOUNTING MONTAGE		
RC		ROUND CANOPY / PAVILLON ROND
		FOR LED 18W: 0.50" CANOPY (2401C)
		FOR INC & LED 4W AND 8W 120V: 1.00" CANOPY (2401E)
		FOR DIMMING LED 4W AND 8W & LED 8W 277V: 1.75" CANOPY (2403G)
		TRACK ADAPTOR / ADAPTATEUR DE RAIL
TA1		1 CIRCUIT
		INC, LED NON-DIMMING (4W & 8W) & LED (18W) 120V ADAPTOR (2734B)
		LED DIMMING (4W & 8W) 120V ADAPTOR (2734F)
TRACK ADAPTOR FINISH FINI ADAPTATEUR DE RAIL ^(A)		
WH		WHITE
BLK		BLACK
M G		METALLIC GRAY
^(A) FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY		
STRUCTURE FINISH FINI STRUCTURE ^(B)		
CHR		CHROME
WH		WHITE
INTERNAL PARABOLIC REFLECTOR SUPPLIED AS WHITE ONLY.		
^(B) INCLUDE CANOPY FINISH IF CANOPY IS SELECTED		
DIFFUSER FINISH FINI DIFFUSEUR		CFR
CFR		CLEAR / FROSTED

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

- BIM
- DIM
- IES
- LED

DESIGN:	Organic glass pendant with frosted diffusing lamp and parabolic interior reflector.
LIGHT SOURCE:	LED as well as many other dimmable fluorescent and incandescent sources.
DIFFUSER:	Hand blown clear glass with precisely aligned frosted section.
STRUCTURE:	Die-formed steel canopy, fittings and interior reflector with white polyester powder coating.
CERTIFIED:	c-CSA-us

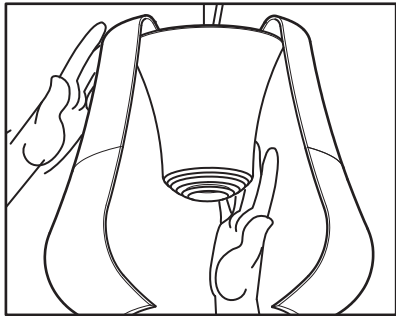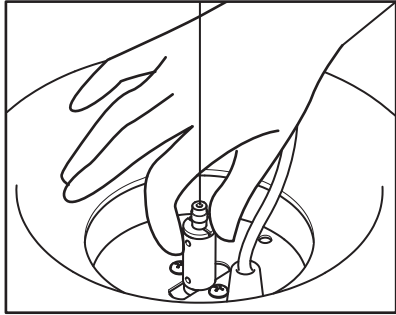

BALANCING THE FIXTURE

PARABOLIC REFLECTOR
White powder coated spun
16Ga aluminium sheet



SINGLE AIRCRAFT CABLE
Adjustable on site

4&8W LED VERSIONS
Machined aluminium heatsink
with integrated driver

FROST BOTTOM SECTION
Sandblasted to protect
from the glare

HAND BLOWN CRYSTAL GLASS
Clear top section for optimized
indirect lighting

18W LED VERSIONS (H0)
LED COB with high efficiency
spherical diffuser

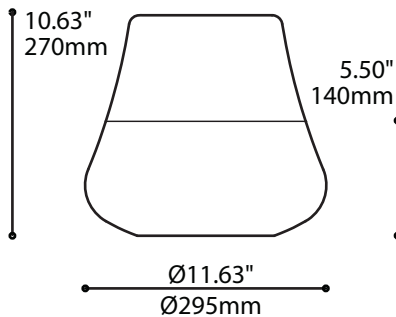

4255-UFL (BARE)



4255-UCR (SKIRT)

SPECIFICATIONS

LIGHT SOURCE
DELIVERED LUMENS
CRI
DRIVER
DIMMING
LM-79
WARRANTY

LED 4W

4x high power LED (total 4.7W)
478lm (4000K)
84 CRI (Typical)
CC 350mA
Phase dimming (DP) or 0-10V dimming (DV)
On request
5 years

LED 8W

4x high power LED (total 9.8W)
875lm (4000K)
CC 700mA

LED 18W

1x COB LED (total 18W)
1429lm (4000K)
CC 500mA

SPECIFICATIONS

LIGHT SOURCE
DIMMING
VOLTAGE

INCANDESCENT



A19, T10 100W
Always
120V



225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



4255-UFL

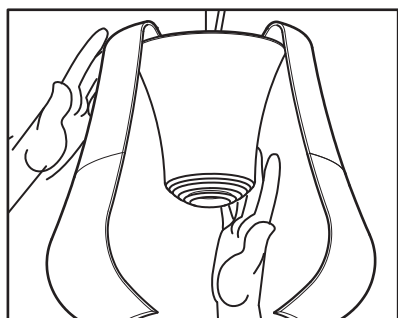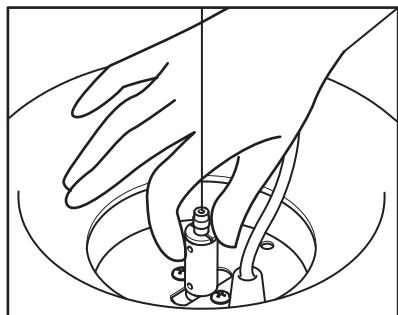

MISE À NIVEAU DU LUMINAIRE

REFLECTEUR PARABOLIQUE
Aluminium repoussé 16Ga
Peinture blanche en poudre


UN CABLE D'ACIER
Adjustable en chantier

VERSIONS DEL 4W et 8W
Radiateur en aluminium machiné
avec unité d'alimentation intégrée

SECTION DU BAS GIVRÉE
Surface du dessous traitée au sable
pour minimiser l'éblouissement

VERSION DEL 18W (HO)
DEL COB avec diffuseur
sphérique de haute efficacité

VERRE CRYSTAL SOUFLÉ À LA MAIN
Section supérieure claire pour un
éclairage indirect optimal

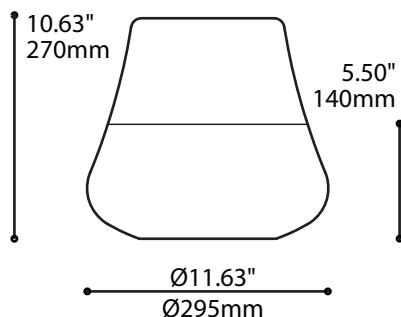

4255-UFL (BARE)



4255-UCR (SKIRT)

SPÉCIFICATIONS

SOURCE LUMINEUSE
LUMENS RÉELS
IRC
ALIMENTATION
GRADATION
LM-79
GARANTIE

LED 4W

4x DEL haute intensité (total 4.7W)
478lm (4000K)
84 IRC (typique)
CC 350mA
Gradation de type Phase (DP) ou 0-10V (DV)
Sur demande
5 ans

LED 8W

4x DEL haute intensité (total 9.8W)
875lm (4000K)

LED 18W

1x DEL COB (total 18W)
1429lm (4000K)

SPÉCIFICATIONS

SOURCE LUMINEUSE
GRADATION
VOLTAGE

INCANDESCENT

A19, T10 100W
Toujours
120V



EUREKA

225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



4255-UFL