


Chalice

EDWARD VAN VLIET

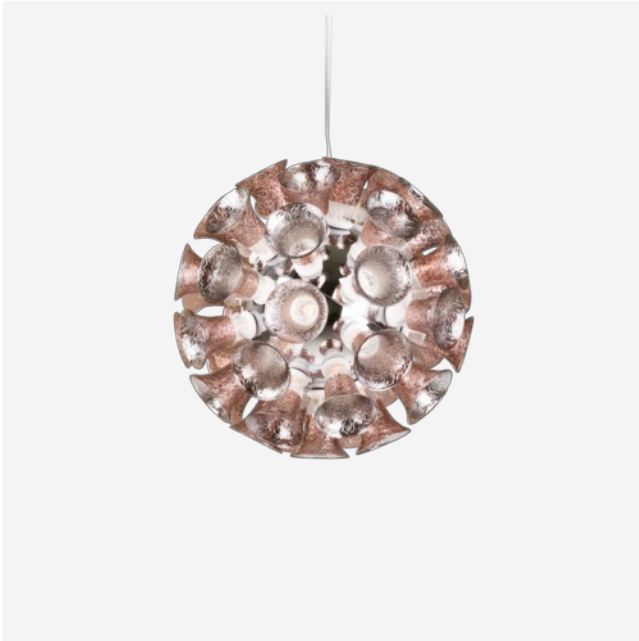

The Chalice Lamp captures the essential grace of glass. Blossoms of tulip-like flowers define the lamp, diffusing light naturally and reflecting the floral pattern enclosed within each chalice.

Detailing



Thanks to the dimmable LED lamps hidden behind the chalices, light is diffused in a natural way and projected by the copper-plated signature flowers.

Colours




Chrome

Metallic Grey

Chalice / 24

Dimensions

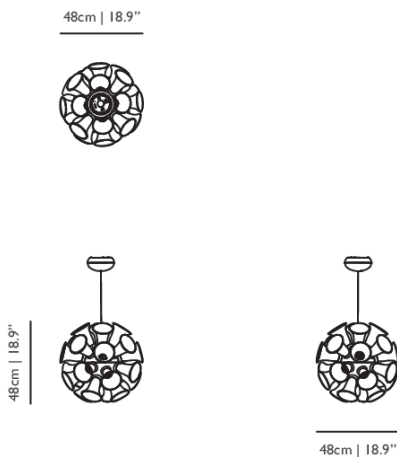

Product

WIDTH 48cm | 18.9"
HEIGHT 48cm | 18.9"
DEPTH 48cm | 18.9"
DIAMETER 48cm | 18.9"
WEIGHT NETTO 7kg | 15.43lbs

Packaging

WIDTH 39.3cm | 15.5"
HEIGHT 46.8cm | 18.4"
CUBAGE 0.16m³ | 5.52ft³
LENGTH 85cm | 33.5"
WEIGHT 20kg | 44.09lbs

Technical CE

MATERIAL

Chromed or powder coated metal sphere, bakelite and glass chalices.

ENERGY LABEL

Energy Label B

LIGHTSOURCE INCLUDED

Yes

INPUT VOLTAGE

230

MAX POWER CONSUMPTION

16W

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"; 1000cm | 393.7"

COLOUR TEMPERATURE

2700 K

LIGHT OUTPUT

450 lm

INSTALLATION REQUIRED

Yes

NUMBER OF LIGHTSOURCES

24

FREQUENCY

50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Brushed steel pebble

CRI

85

DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase

See last page for more information about the dimming possibilities.



Technical cULus

MATERIAL

Chromed or powder coated metal sphere, bakelite and glass chalices.

ENERGY LABEL

Energy Label B

LIGHTSOURCE INCLUDED

Yes

INPUT VOLTAGE

120

MAX POWER CONSUMPTION

16W

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"; 1000cm | 393.7"

COLOUR TEMPERATURE

2700 K

LIGHT OUTPUT

450 lm

INSTALLATION REQUIRED

Yes

NUMBER OF LIGHTSOURCES

24

FREQUENCY

50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Brushed steel pebble

CRI

85

DIMMING & LIGHTING CONTROL


Mains, Trailing edge, Reverse phase

See last page for more information about the dimming possibilities.



Chalice / 48

Dimensions

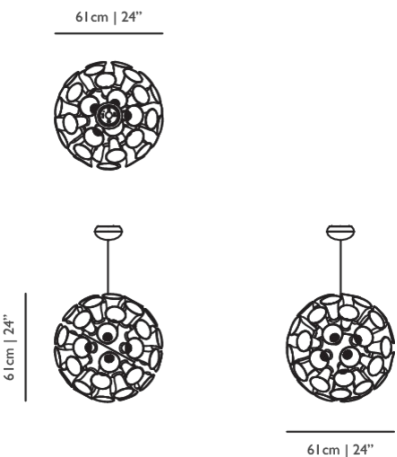

Product

WIDTH 61cm | 24"
HEIGHT 61cm | 24"
DEPTH 61cm | 24"
DIAMETER 61cm | 24"
WEIGHT NETTO 7kg | 15.43lbs

Packaging

WIDTH 46.8cm | 18.4"
HEIGHT 57.8cm | 22.8"
CUBAGE 0.34m³ | 12.18ft³
LENGTH 127.5cm | 50.2"
WEIGHT 30kg | 66.14lbs

Technical CE

MATERIAL

Chromed or powder coated metal sphere, bakelite and glass chalices.

ENERGY LABEL

Energy Label B

LIGHTSOURCE INCLUDED

Yes

INPUT VOLTAGE

230

MAX POWER CONSUMPTION

32W

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"; 1000cm | 393.7"

COLOUR TEMPERATURE

2700 K

LIGHT OUTPUT

900 lm

INSTALLATION REQUIRED

Yes

NUMBER OF LIGHTSOURCES

48

FREQUENCY

50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Brushed steel pebble

CRI

85

DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase

See last page for more information about the dimming possibilities.



*Technical cULus***MATERIAL**

Chromed or powder coated metal sphere, bakelite and glass chalices.

ENERGY LABEL

Energy Label B

LIGHTSOURCE INCLUDED

Yes

INPUT VOLTAGE

120

MAX POWER CONSUMPTION

32W

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"; 1000cm | 393.7"

COLOUR TEMPERATURE

2700 K

LIGHT OUTPUT

900 lm

INSTALLATION REQUIRED

Yes

NUMBER OF LIGHTSOURCES

48

FREQUENCY

50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Brushed steel pebble

CRI

85

DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase

See last page for more information about the dimming possibilities.



Dimming & Lighting Control

Mains, Trailing edge, Reverse phase

The luminaire is dimmable by using an external Electronic Low Voltage dimmer. The dimmer is usually mounted on an existing wall socket and there is no need to change your home's wiring. On the dimmer it should show that it is a LED dimmer, suitable for 5 Watts or lower and C-type capable. Dimming is less fluent and can come with some flicker, a beep or a buzz.

Compatible models: 24 CE, 24 cULus, 48 CE, 48 cULus
