

DELTA 4234-VDX / VDXA

PROJECT PROJÉT

SPEC TYPE

NOTES



OVERALL HEIGHT HAUTEUR HORS TOUT


LIGHT SOURCE	INC TRACK 1 CIRCUIT	LED TRACK 1 CIRCUIT	INC	LED
MOUNTING	2734B	2734F	2431E	2431G
CABLE	82.15"	83.55"	81.80"	82.55"

MOUNTING OPTIONS OPTIONS DE MONTAGE

			
2734B 1.46" x 1.36" 37 x 35mm	2734F 7.25" x 1.70" 37 x 35mm	2431E 5.00" x 5.00" x 1.00" 127 x 127 x 25mm	2431G 5.25" x 5.25" x 1.75" 133 x 133 x 44mm
* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS			

STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

AC CABLE STD 60" 1523mm	
-------------------------------	---

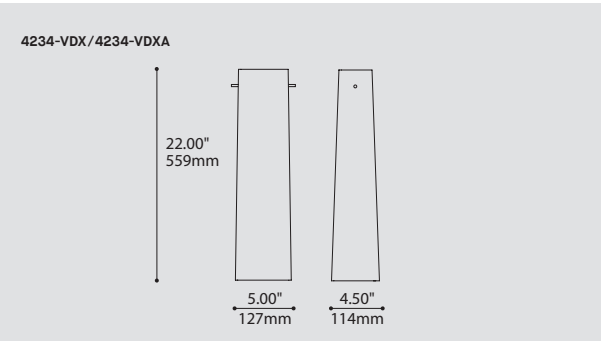


ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
MODEL MODÈLE		
4234-VDX	DELTA (GLASS)	
4234-VDXA	DELTA (ACRYLIC)	
LIGHT SOURCE SOURCE LUMINEUSE		
(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)		
INC.100		100W, INC, B10 / HAL T10, MEDIUM BASE (120V ONLY)
LED		REGULAR OUTPUT
LED.HO		HIGH OUTPUT
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
FOR LED ONLY		
30		3000K
35		3500K
40		4000K
VOLTAGE VOLTAGE		
120V		120 VOLT
277V*		277 VOLT
*NOT AVAILABLE WITH A TRACK ADAPTOR		
DIMMING OPTION OPTION DE GRADATION		
FOR LED ONLY		
DV*		0-10V DIMMING (120-277V)
DP		PHASE DIMMING (120V ONLY)
*NOT AVAILABLE WITH A TRACK ADAPTOR		
CABLE CABLE		AC
AC		AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE
CABLE LENGTH LONGUEUR CABLE		
60		60" AIRCRAFT CABLE (STD LENGTH)
**		CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
MOUNTING MONTAGE		
SQC		SQUARE CANOPY / PAVILLON CARRÉ FOR INC: 1.00" CANOPY (2431E) FOR LED: 1.75" CANOPY (2431G)
TA1		TRACK ADAPTOR / ADAPTATEUR DE RAIL 1 CIRCUIT INC 120V ADAPTOR (2734B) LED NON-DIMMING 120V ADAPTOR (2734F)
TRACK ADAPTOR FINISH FINI ADAPTATEUR DE RAIL (A)		
WH		WHITE
BLK		BLACK
M G		METALLIC GRAY
(A) FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY		
STRUCTURE FINISH FINI STRUCTURE		WH
WH		WHITE
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH		WHITE

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

- BIM
- DIM
- IES
- LED
- REM

DESIGN:	Subtle and highly modern design that features a tapering rectilinear form.
LIGHT SOURCE:	LED and other light sources available.
DIFFUSER:	Hand blown white triplex glass or acrylic available in two lengths.
CERTIFIED:	c-CSA-us

4234-VDX/VDXA
DELTA

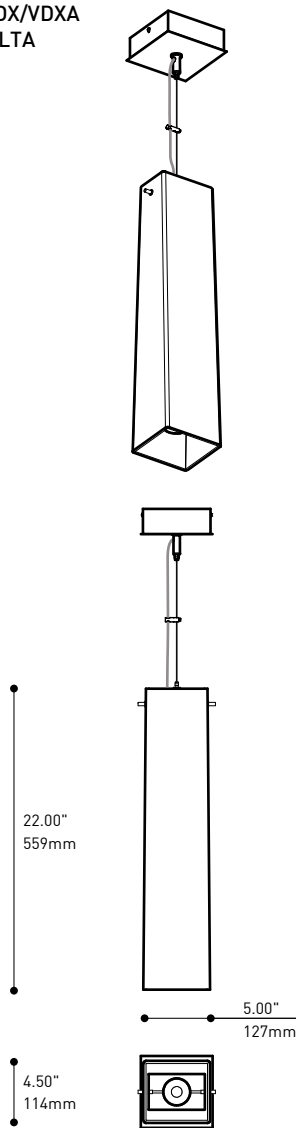


MOUNTING CABLE
Field adjustable aircraft cable
with clear power cord

INTERNAL STRUCTURE
Die-formed cold rolled steel vertical support
coated with high reflectance
white powder coat finish

LED LIGHT ENGINE
ANSI binned white LED (Nichia)
w/ on-board thermal management,
mounted back to back on internal structure

SHADE ASSEMBLY
Hand blown white triplex glass diffuser or
translucent white acrylic diffuser,
mounted on 2-way threaded rods and knobs,
designed for easy installation

ANTI-GLARE DIFFUSER
Precision laser cut white acrylic disk
mechanically attached to a chromed
decorative center knob

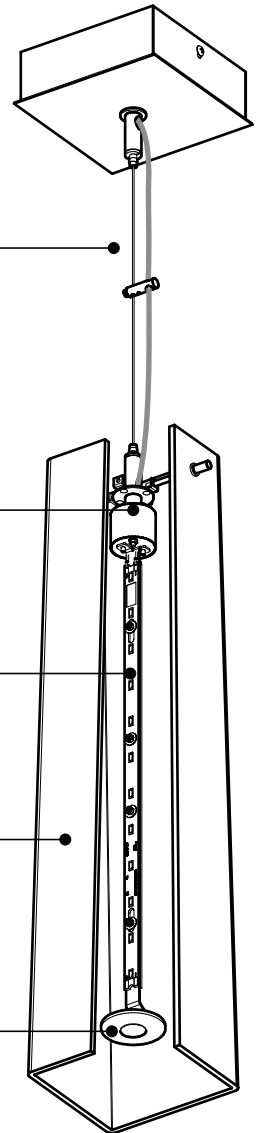

SPECIFICATIONS

LED-REG

LED-HO

INCANDESCENT

LIGHT SOURCE	30 x NICHIA LEDS		1 x 100w B10
MODULE	UL recognized - made in USA		
LUMENS (DELIVERED)	1134 lm	1629 lm	
SYSTEME WATTAGE	12.6W	18.1W	
CCT / CRI	80 CRI (typical)		
ROHS	Compliant		
THERMAL MANAGEMENT	Light Engine w/ on-board Thermal Management		
LIGHT DISTRIBUTION	General diffused - 120° Beam Angle		General diffused
VOLTAGE	120V or 277V		120V only
DIMMING	0-10V Dimming		N/A
LM-79 / L70	On request / Estimated 50 000 hrs		
STRUCTURE	Formed Cold Rolled steel finished in white polyester powder coat (0.060" nominal thickness)		
SHADE	Hand blown white triplex glass or Translucent white acrylic w/ 2-way side mounting points		
MOUNTING	Square ceiling canopy and exposed powerfeeds finished in chrome		
DIFFUSER	Precision laser cutting white acrylic disk (3mm nominal thickness) combined w/ chromed decorative knob		
WARRANTY	5 years		1 year




EUREKA

225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



4234-VDX

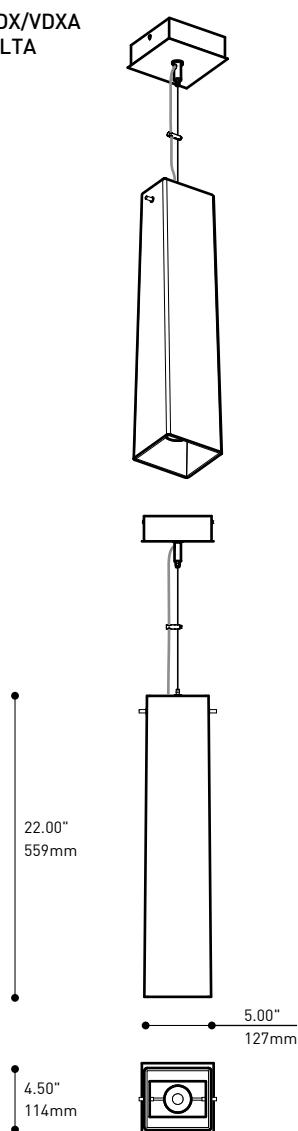4234-VDX/VDXA
DELTA**INSTALLATION SIMPLE**

Système de suspension par câble d'acier, composé d'un fil électrique clair, facile pour la mise à niveau et ajustable sur le site

STRUCTURE INTERNE

Support vertical découpé, plié en acier, couvert par une peinture blanche réfléchissante

SOURCE LUMINEUSE À LED


Bandes de LED (Nichia) blanches à alimentation 12V, offertes avec un dissipateur thermique intégré, et montées verticalement sur la structure interne

ASSEMBLAGE DU DIFFUSEUR

Verre Triplex blanc soufflé à la main ou acrylique translucide blanc, monté sur un support composé de deux tiges, conçu pour une installation facile

ÉCRAN ANTI-ÉBLOUISSEMENT

Disque acrylique blanc découpé au laser, attaché mécaniquement à l'aide d'une pièce décorative chromée

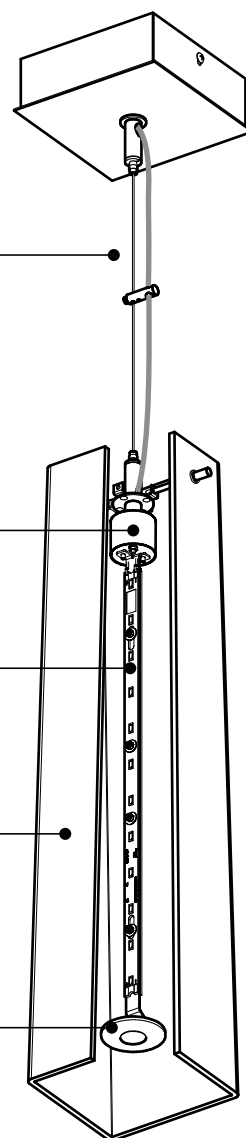**SPÉCIFICATIONS****LED-REG****LED-HO****INCANDESCENTE****SOURCE LUMINEUSE**

30 x NICHIA LEDS

1 x 100w B10

MODULE

Reconnu UL - Fabriqué aux États-Unis

LUMENS (LIVRÉS)

1134 lm

1629 lm

WATTAGE DU SYSTÈME

12.6W

18.1W

CCT / CRI

80 CRI (typique)

ROHS

Conforme

GESTION THERMIQUE

Sources lumineuse avec autocontrôle de température

DISTRIBUTION LUMINEUSE

Mixte - Diffusée à 120°

Mixte

VOLTAGE

120V ou 277V

120V seulement

GRADATION

0-10V Gradation

Non disponible

LM-79 / L70

Sur demande / 50 000 hrs estimées

STRUCTURE

Acier découpé, plié (0.060" épaisseur nominale) / finie de peinture électrostatique à base de Polyester blanche

DIFFUSEUR

Verre Triplex blanc soufflé à la main ou acrylique translucide blanc, monté sur un support par deux tiges

MONTAGE

Pavillon carré disponible en plusieurs finis

LENTILLE DU BAS

Disque acrylique blanc en découpe rond (3mm épaisseur nominale) attaché mécaniquement à l'aide d'une pièce décorative chromée

GARANTIE

5 ans

1 an



225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com

**4234-VDX**