







simple purity,  
large impact



PROJECT PROJCT
SPEC TYPE
NOTES

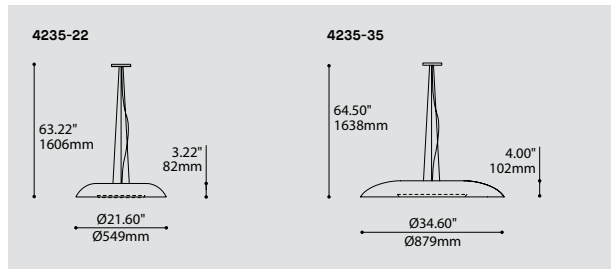


ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE		CODE
MODEL MODÈLE				
4235-22	EMPRESS 22"			
4235-35	EMPRESS 35"			
LIGHT SOURCE SOURCE LUMINEUSE		LED		
LED	REGULAR OUTPUT			
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR				
27*	2700K			
30	3000K			
35	3500K			
40	4000K			
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)				
80	80+ CRI			
90*	90+ CRI			
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
VOLTAGE VOLTAGE				
120V	120 VOLT			
277V	277 VOLT			
DIMMING OPTION OPTION DE GRADATION				
DV	0-10V DIMMING (120V-277V)			
DP	PHASE DIMMING (120V ONLY)			
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE				
CABLE CÂBLE		AC		
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE			
CABLE LENGTH LONGUEUR DE CÂBLE				
60	60" AIRCRAFT CABLE (STD LENGTH)			
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)			
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
CANOPY FINISH FINI STRUCTURE		WHE		
WHE	WHITE FINE TEXTURE			
DECORATIVE PLATE FINISH FINI PLAQUE DÉCORATIVE		WHE		
WHE	WHITE FINE TEXTURE			
DIFFUSER FINISH FINI DIFFUSEUR		WH		
WH	WHITE			
ACCESSORY ACCESSOIRE				
3983	DEEP JUNCTION BOX (PROVIDED FOR 4235-22)			

BIM DIM IES LED

<b>DESIGN :</b>	Now available in two formats, this ceiling mount brings a gentle diffused indirect light and quiet sophistication to your interior space.
<b>INSTALLATION :</b>	Comes with an easy-to-install triple aircraft cable configuration.
<b>LIGHT SOURCE :</b>	LED source creating an indirect light with a subtle back illumination.
<b>STRUCTURE :</b>	Die spun steel plate, available in white fine textured finish.
<b>DIFFUSER :</b>	Thermoformed matte white acrylic with frosted finish for optimal light diffusion. Available in 22" or 35" diameter.
<b>CERTIFIED :</b>	c-CSA-us
<hr/>	
<b>CONCEPTION :</b>	Maintenant offert en deux formats, ce plafonnier apportera un éclairage indirect et délicatement diffus à votre espace.
<b>INSTALLATION :</b>	Installation simplifiée avec trois câbles d'acier de type aviation.
<b>SOURCE LUMINEUSE :</b>	Module DEL créant un éclairage indirect frontal et une légère illumination arrière.
<b>STRUCTURE :</b>	Fait d'acier repoussé et offert avec notre finition architecturale blanche finement texturée.
<b>DIFFUSEUR :</b>	Acrylique mat thermoformé et givré pour une diffusion lumineuse optimale. Offert en diamètres de 22" et 35".
<b>CERTIFIÉ :</b>	c-CSA-us

# EMPRESS

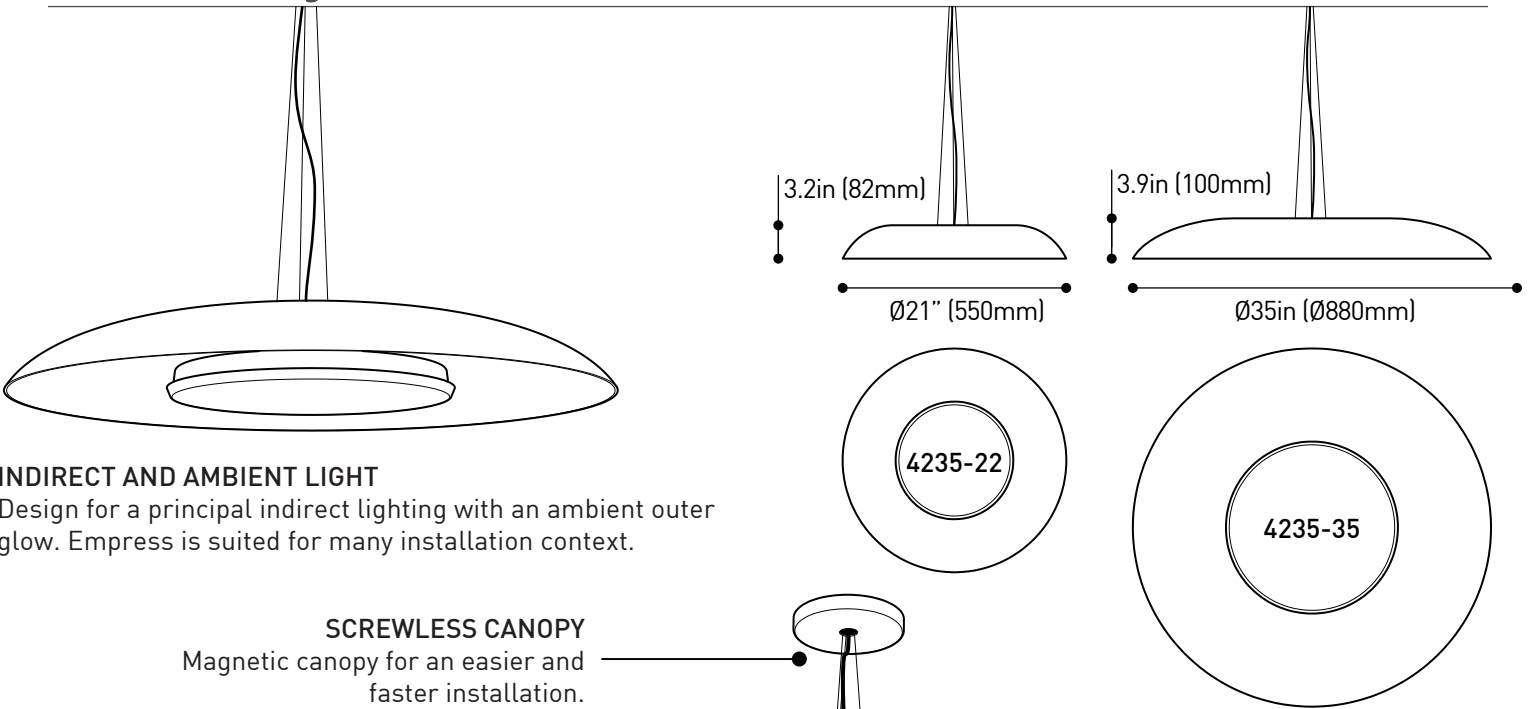

Design for a principal indirect lighting with an ambient outer glow. Empress is suited for many installation context.

Magnetic canopy for an easier and faster installation.

## Easy installation and adjustment.

Custom made thermoformed and frosted white PMMA reflector for a soft and even light.

Custom made high performance  
LED ring for a total of 22W or 30W.

Die-spun steel dish, available in white architectural grade fine textured finish.



CHARACTERISTICS	4235-22	4235-35
LIGHT SOURCE	78 x Nichia	156 x Nichia
DELIVERED LUMENS	1273 lumens	1991 lumens
SYSTEM WATTAGE	22W	30W
CRI	80+ CRI or 90+ CRI	
CCT	2700K, 3000K, 3500K or 4000K 3-step MacAdam ellipse binning	
LIGHT DISTRIBUTION	Semi-direct and ambient illumination	
DIFFUSOR	Thermoformed and frosted white PMMA	
STRUCTURE	Die-spun steel dish, available in white architectural grade fine textured finish	
VOLTAGE	120V (DP) or 120-277V (DV)	
DIMMING	Phase dimming (DP) and 0-10V dimming (DV)	
WARRANTY	5 years	



# Photometry

## EMPRESS

### 3035-22 LED & 4235-22 LED


CCT (K):	3500
Delivered Lumens (lm):	1273
System wattage (W)*:	22
Distribution:	Semi-Direct
Delivered Efficacy (lm/W):	58
Photometric type	C

#### Luminous dimensions

Luminous shape:	Rectangle
Units:	in (mm)
0-180 Axis:	19.685 (500)
90-270 Axis:	19.685 (500)
Height:	3.937 (100)

#### Luminaire spacing criteria

2 luminaires, plane 0:	1.32
2 luminaires, plane 90:	1.44
4 luminaires:	1.57

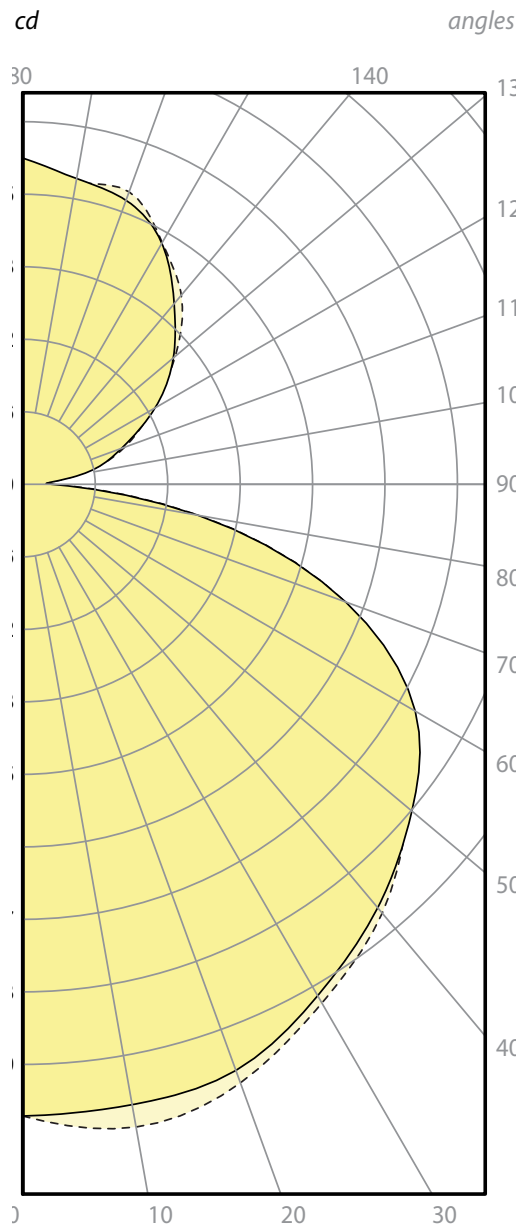

### 3035-35 LED & 4235-35 LED


CCT (K):	3500
Delivered Lumens (lm):	1991
System wattage (W)*:	30.1
Distribution:	Semi-Direct
Delivered Efficacy (lm/W):	66
Photometric type	C

#### Luminous dimensions

Luminous shape:	Rectangle
Units:	in (mm)
0-180 Axis:	35.43 (900)
90-270 Axis:	35.43 (900)
Height:	3.937 (100)

#### Luminaire spacing criteria

2 luminaires, plane 0:	1.53
2 luminaires, plane 90:	1.71
4 luminaires:	1.78

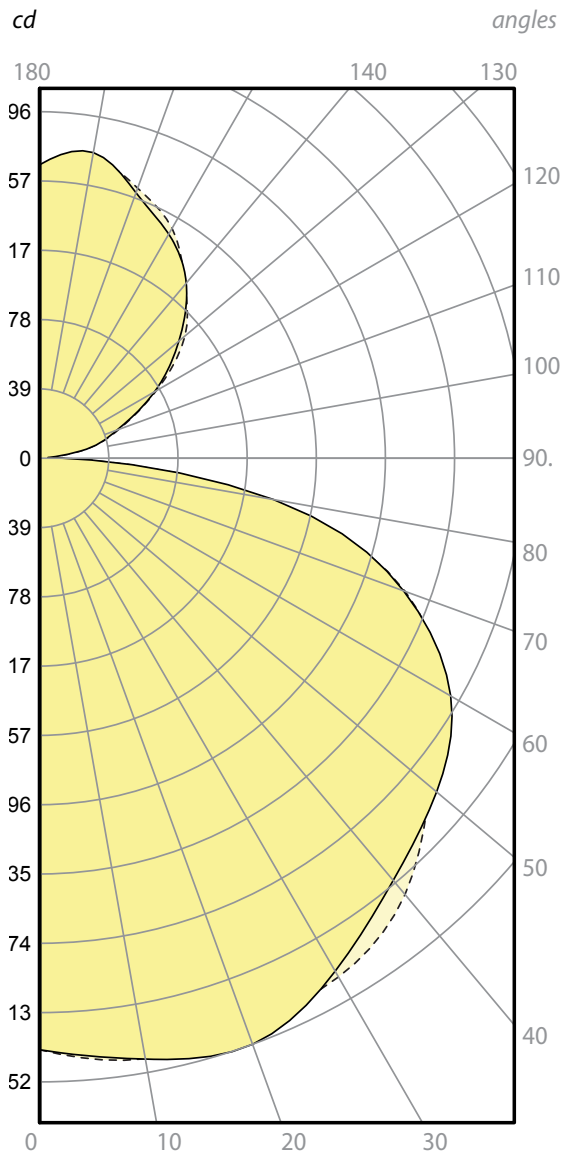



EMPRESS 3035


PROJECT	PROJET
SPEC TYPE	
NOTES	




FAMILY FAMILLE



4235-22



3035-22 (WALL SURFACE)

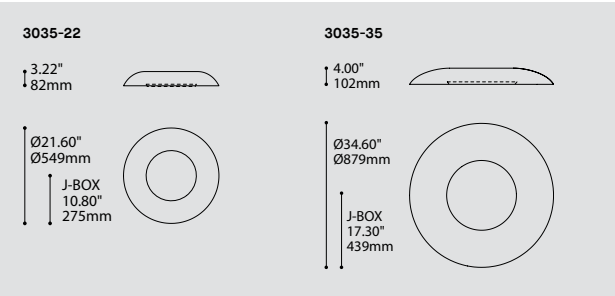

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL	MODÈLE	
3035-22	EMPRESS 22"	
3035-35	EMPRESS 35"	
LIGHT SOURCE	SOURCE LUMINEUSE	LED
LED	REGULAR OUTPUT	
COLOR TEMPERATURE	TEMPÉRATURE DE COULEUR	
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI)	INDICE DE RENDU DE COULEUR (IRC)	
80	80+ CRI	
90*	90+ CRI	
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
VOLTAGE	VOLTAGE	
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION	OPTION DE GRADATION	
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE		
DECORATIVE PLATE FINISH	FINI PLAQUE DÉCORATIVE	WHE
WHE	WHITE FINE TEXTURE	
DIFFUSER FINISH	FINI DIFFUSEUR	WH
WH	WHITE	
ACCESSORY	ACCESSOIRE	
3983	DEEP JUNCTION BOX (PROVIDED FOR 3035-22)	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

- BIM
- DIM
- IES
- LED

DESIGN:	Now available in two formats, this wall sconce brings a gentle diffused indirect light and quiet sophistication to your interior space and is ADA compliant. The fixture installs on a standard junction box.
INSTALLATION:	LED source creating an indirect light with a subtle back illumination.
LIGHT SOURCE:	Die spun steel plate, available in white fine textured finish.
STRUCTURE:	Thermoformed matte white acrylic with frosted finish for optimal light diffusion.
DIFFUSER:	Available in 22" or 35" diameter.
CERTIFIED:	c-CSA-us
CONCEPTION:	Maintenant offert en deux formats, cette applique murale apportera un éclairage indirect et délicatement diffus à votre espace. Il est conforme à la norme ADA.
INSTALLATION:	Le luminaire s'installe simplement sur une boîte de jonction standard.
SOURCE LUMINEUSE:	Module DEL créant un éclairage indirect frontal et une légère illumination arrière.
STRUCTURE:	Fait d'acier repoussé et offert avec notre finition architecturale blanche finement texturée.
DIFFUSEUR:	Acrylique mat thermoformé et givré pour une diffusion lumineuse optimale.
CERTIFIÉ:	Offert en diamètres de 22" et 35".
	c-CSA-us

EMPRESS 3035


PROJECT	PROJET
SPEC TYPE	
NOTES	




FAMILY FAMILLE



4235-22



3035-22 (WALL SURFACE)

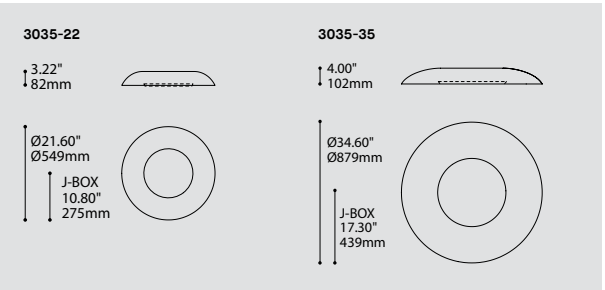

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL	MODÈLE	
3035-22	EMPRESS 22"	
3035-35	EMPRESS 35"	
LIGHT SOURCE	SOURCE LUMINEUSE	LED
LED	REGULAR OUTPUT	
COLOR TEMPERATURE	TEMPÉRATURE DE COULEUR	
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI)	INDICE DE RENDU DE COULEUR (IRC)	
80	80+ CRI	
90*	90+ CRI	
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
VOLTAGE	VOLTAGE	
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION	OPTION DE GRADATION	
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE		
DECORATIVE PLATE FINISH	FINI PLAQUE DÉCORATIVE	WHE
WHE	WHITE FINE TEXTURE	
DIFFUSER FINISH	FINI DIFFUSEUR	WH
WH	WHITE	
ACCESSORY	ACCESSOIRE	
3983	DEEP JUNCTION BOX (PROVIDED FOR 3035-22)	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

- BIM
- DIM
- IES
- LED


DESIGN:	Now available in two formats, this wall sconce brings a gentle diffused indirect light and quiet sophistication to your interior space and is ADA compliant. The fixture installs on a standard junction box.
INSTALLATION:	LED source creating an indirect light with a subtle back illumination.
LIGHT SOURCE:	Die spun steel plate, available in white fine textured finish.
STRUCTURE:	Thermoformed matte white acrylic with frosted finish for optimal light diffusion.
DIFFUSER:	Available in 22" or 35" diameter.
CERTIFIED:	c-CSA-us
CONCEPTION:	Maintenant offert en deux formats, cette applique murale apportera un éclairage indirect et délicatement diffus à votre espace. Il est conforme à la norme ADA.
INSTALLATION:	Le luminaire s'installe simplement sur une boîte de jonction standard.
SOURCE LUMINEUSE:	Module DEL créant un éclairage indirect frontal et une légère illumination arrière.
STRUCTURE:	Fait d'acier repoussé et offert avec notre finition architecturale blanche finement texturée.
DIFFUSEUR:	Acrylique mat thermoformé et givré pour une diffusion lumineuse optimale.
CERTIFIÉ:	Offert en diamètres de 22" et 35".
	c-CSA-us



Anatomy

BIM DIM IES LED ADA

EMPRESS

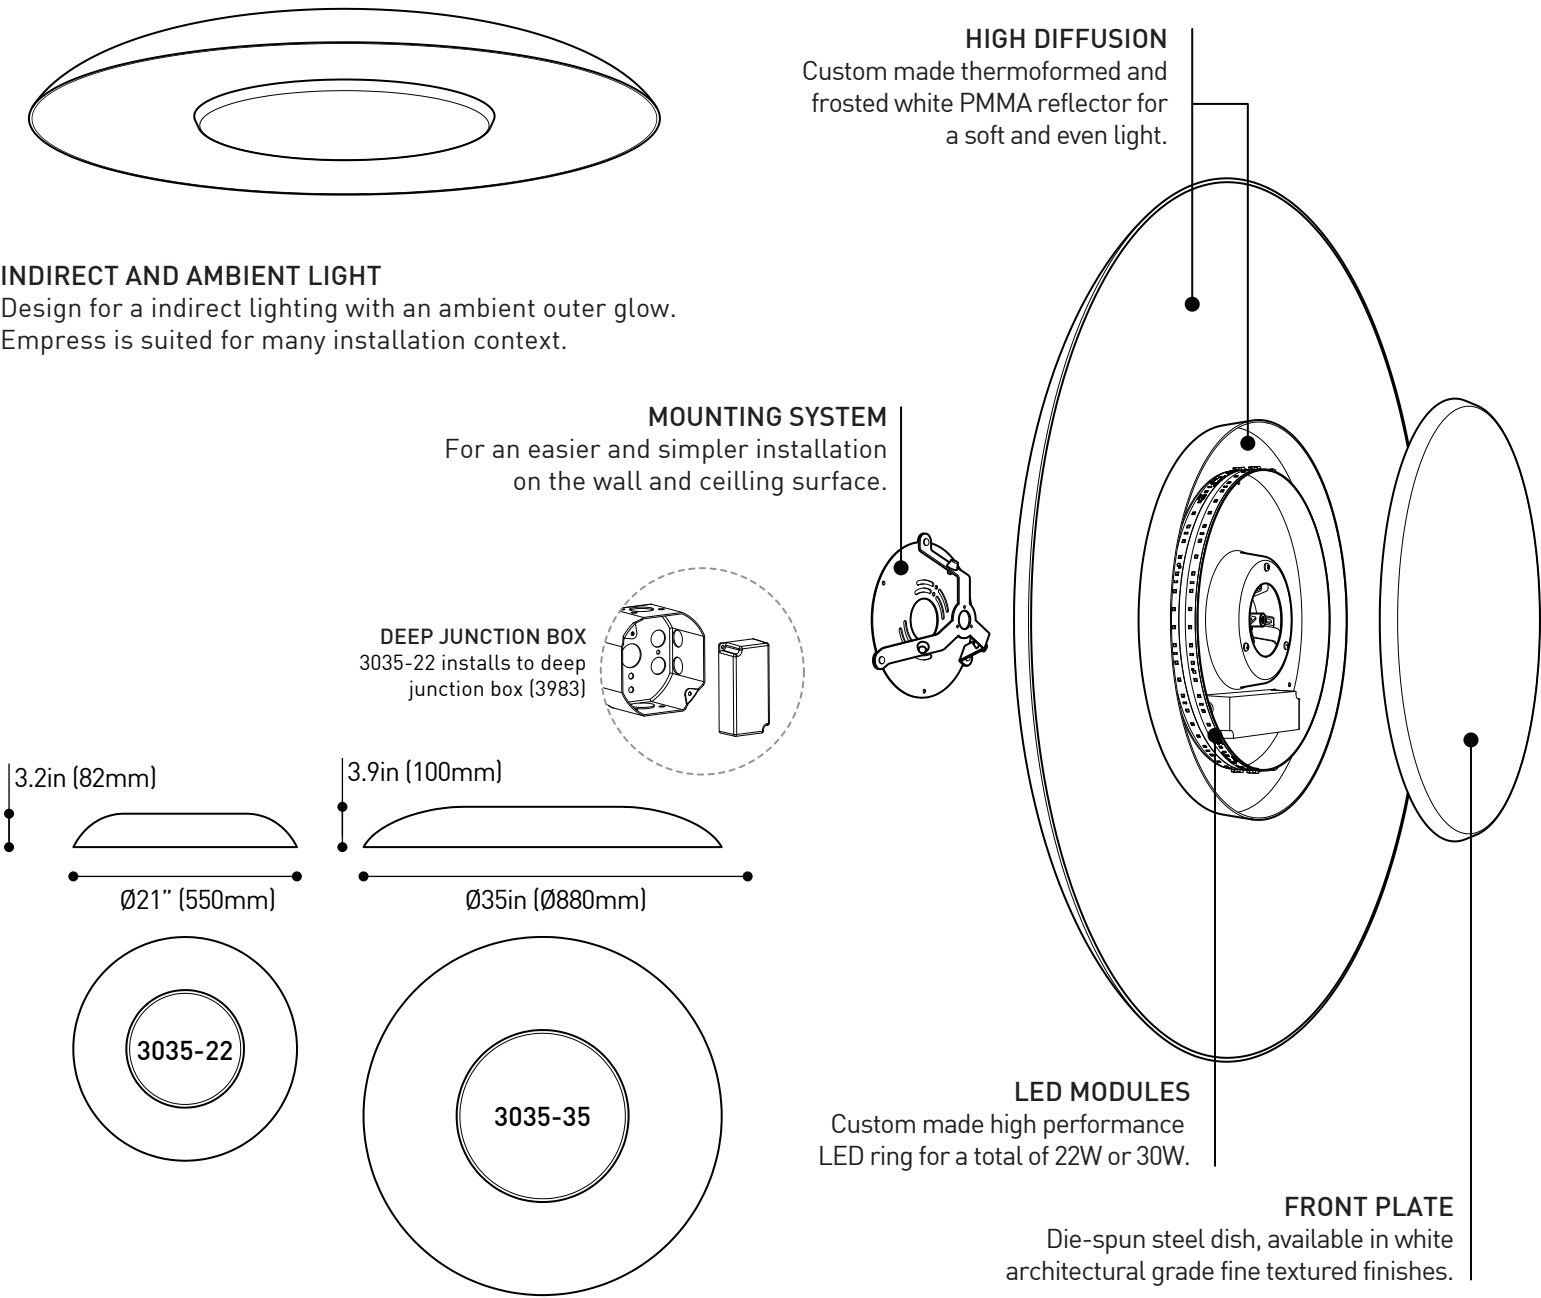

CHARACTERISTICS	3035-22	3035-35
LIGHT SOURCE	78 x Nichia	156 x Nichia
DELIVERED LUMENS	1273 lumens	1991 lumens
SYSTEM WATTAGE	22W	30W
CRI	80+ CRI or 90+ CRI	
CCT	2700K, 3000K, 3500K or 4000K 3-step MacAdam ellipse	
LIGHT DISTRIBUTION	Semi-direct and ambient illumination	
DIFFUSER	Thermoformed and frosted white PMMA	
STRUCTURE	Die-spun steel dish, available in white architectural grade fine textured finishes	
VOLTAGE	120V [DP] or 120-277V [DV]	
DIMMING	Phase dimming [DP] and 0-10V dimming [DV]	
WARRANTY	5 years	





## EMPRESS 3035


PROJECT PROJÉT
SPEC TYPE
NOTES



### FAMILY FAMILLE



4235-22 3035-22 (CEILING SURFACE)

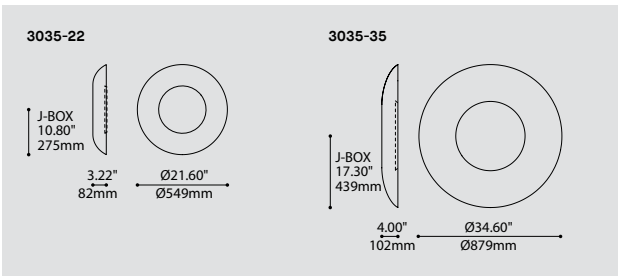

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		
3035-22	EMPRESS 22"	
3035-35	EMPRESS 35"	
LIGHT SOURCE SOURCE LUMINEUSE		LED
LED	REGULAR OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
	*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		
80	80+ CRI	
90*	90+ CRI	
	*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE	
DECORATIVE PLATE FINISH FINI PLAQUE DÉCORATIVE		WHE
WHE	WHITE FINE TEXTURE	
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	
ACCESSORY ACCESSOIRE		
3983	DEEP JUNCTION BOX (PROVIDED FOR 3035-22)	

### PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

ADA BIM DIM IES LED

DESIGN:	Now available in two formats, this wall sconce brings a gentle diffused indirect light and quiet sophistication to your interior space and is ADA compliant.
INSTALLATION:	The fixture installs on a standard junction box.
LIGHT SOURCE:	LED source creating an indirect light with a subtle back illumination.
STRUCTURE:	Die spun steel plate, available in white fine textured finish.
DIFFUSER:	Thermoformed matte white acrylic with frosted finish for optimal light diffusion. Available in 22" or 35" diameter.
CERTIFIED:	c-CSA-us
CONCEPTION:	Maintenant offert en deux formats, cette applique murale apportera un éclairage indirect et délicatement diffus à votre espace. Il est conforme à la norme ADA.
INSTALLATION:	Le luminaire s'installe simplement sur une boîte de jonction standard.
SOURCE LUMINEUSE:	Module DEL créant un éclairage indirect frontal et une légère illumination arrière.
STRUCTURE:	Fait d'acier repoussé et offert avec notre finition architecturale blanche finement texturée.
DIFFUSEUR:	Acrylique mat thermoformé et givré pour une diffusion lumineuse optimale. Offert en diamètres de 22" et 35".
CERTIFIÉ:	c-CSA-us

## EMPRESS 3035


PROJECT PROJÉT
SPEC TYPE
NOTES



### FAMILY FAMILLE



4235-22 3035-22 (CEILING SURFACE)

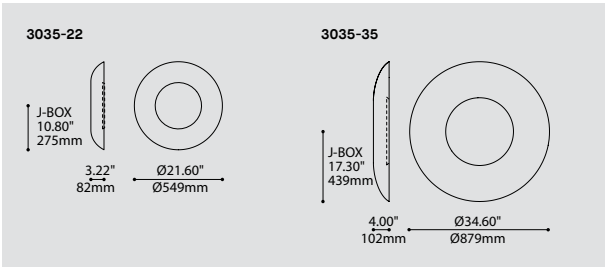

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		
3035-22	EMPRESS 22"	
3035-35	EMPRESS 35"	
LIGHT SOURCE SOURCE LUMINEUSE		LED
LED	REGULAR OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
	*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		
80	80+ CRI	
90*	90+ CRI	
	*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE	
DECORATIVE PLATE FINISH FINI PLAQUE DÉCORATIVE		WHE
WHE	WHITE FINE TEXTURE	
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	
ACCESSORY ACCESSOIRE		
3983	DEEP JUNCTION BOX (PROVIDED FOR 3035-22)	

### PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

ADA BIM DIM IES LED

DESIGN:	Now available in two formats, this wall sconce brings a gentle diffused indirect light and quiet sophistication to your interior space and is ADA compliant.
INSTALLATION:	The fixture installs on a standard junction box.
LIGHT SOURCE:	LED source creating an indirect light with a subtle back illumination.
STRUCTURE:	Die spun steel plate, available in white fine textured finish.
DIFFUSER:	Thermoformed matte white acrylic with frosted finish for optimal light diffusion. Available in 22" or 35" diameter.
CERTIFIED:	c-CSA-us
CONCEPTION:	Maintenant offert en deux formats, cette applique murale apportera un éclairage indirect et délicatement diffus à votre espace. Il est conforme à la norme ADA.
INSTALLATION:	Le luminaire s'installe simplement sur une boîte de jonction standard.
SOURCE LUMINEUSE:	Module DEL créant un éclairage indirect frontal et une légère illumination arrière.
STRUCTURE:	Fait d'acier repoussé et offert avec notre finition architecturale blanche finement texturée.
DIFFUSEUR:	Acrylique mat thermoformé et givré pour une diffusion lumineuse optimale. Offert en diamètres de 22" et 35".
CERTIFIÉ:	c-CSA-us

