LC Shutters

LC-SHUT-P / 1x15W E26 / 120V / White / Wht / - / - / - / 5741913396


The fixture emits a primarily downward illumination. The perforated pattern on the shade provides a soft illumination around the fixture. Meanwhile, the perforation helps lighten up the surface of the shade in a decorative way, when it is turned on, thereby maintaining the contour of the fixture, whether it is on or off. The light source is surrounded by an opal diffuser, which ensures that the fixture is 100% glare-free. And finally, the shape of the diffuser allows a beautiful view into the fixture.





Louise Campbell

Louise Campbell was born in Copenhagen in 1970. Being the daughter of a Danish father and an English mother, she grew up and was educated in both countries. After graduating from the London College of Furniture in 1992, she returned to Denmark and continued her studies in Industrial Design at Denmark's Design School, graduating from here in 1995.



Jissen 120th memorial square (Jissen Women's University)



Yokohama College of Dental Care and Health Sciences

Product info

Information

Electrical: System Wattage: 15W Delivered lumens: 1,521 Efficacy: 101 lm/W Certifications: cULus, Damp Location Protection class IP20 Controllability: Phase dimming Actual performance dependent upon screw-base lamp used.

Mounting

Cord type: 2-conductor, 18 AWG white PVC power cord. Canopy: White. Cord length: 12'.

Finish

White, powder coated.

Materials

Shade: Spun aluminum, punched and embossed. Suspension: Die cast aluminum. Diffuser ball: handblown matte white opal glass.

Sizes and weight

Width x Height x Length (in.) | 17.3 x 11.8 x 17.3 Max 8.7 lbs

Compliance


cULus, Damp location.

Light source

1x15W E26


Information

Electrical:
System Wattage: 15W
Delivered lumens: 1,521
Efficacy: 101 lm/W
Certifications:
cULus, Damp Location
Protection class IP20
Controllability: Phase dimming
Actual performance dependent upon screw-base lamp used.

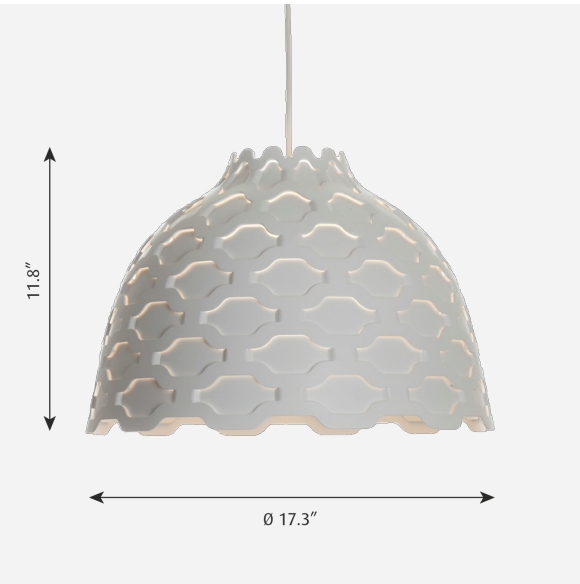


Light distribution diagrams


Cartesian

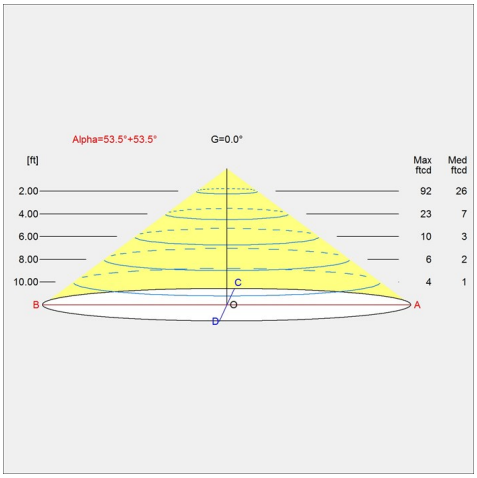

Isolux

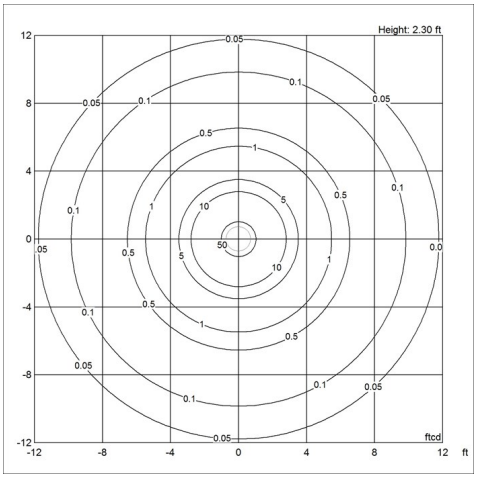

Polar

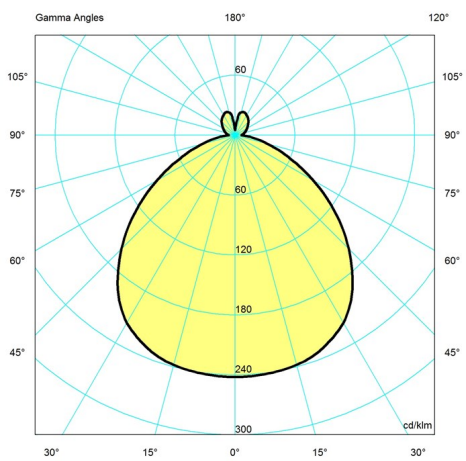

Spare parts & accessories

Product	Variant number
LC SHUTTERS DIFFUSER BALL V2	5741094639

Data specifications

Colour	**White**	Length	**17.3**
Width	**17.3**	Height	**11.8**
Built-in Height	**-**	IP class	**20**
Class	**-**	Net Weight	**8.7**
Standby (W)	**-**	Power Factor (P = 100 % / P = 50 %)	**-**
Inrush Current	**-**	Light source	**1x15W E26**

Kelvin	-	CRI	-
SDCM	-	Lumen	-
Watt	-	Efficacy	-
Light control	-	Min. Dim Level (%)	-
UGR Transversal / Axial	**17.2/17.2**	L80B50 (hours)	-
Driver life	-		