LP Slim Round Suspended

LP-SLIM-SUSP / 9.8 IN / 13W LED/3000K / 120-277V/60HZ / Black / OPAL / Wht / - / Dim 0-10v / - / 10000140942

The slim housing encircles a high-efficient acrylic diffuser emitting diffused primarily downward directed light. The slim body has a slight curvature and an inner curve which reduces contrast. The product family comes in a range of sizes and mounting options for a wide range of applications. Surface mounted and suspended versions have an indirect light component.





Set location - KEA



Product info

Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

Information

Electrical: System Wattage: 13W, 25W or 54W LED Wattage: 12W, 23W, or 50 W Delivered lumens: 1,092 - 6,262 Efficacy: 84.0 lm/W - 116.0 lm/W Certifications: cULus, Damp Location Protection class IP20 Controllability: 0-10V Dimming Color Rendering: Ra≥90

Mounting

Suspension length: 12 ft. Canopy: White. Cord type: 2 conductor, 18 AWG, white PVC power cord.

Finish

White, black, powder coated or clear lacquered, pickled aluminum.

Materials

Reflector, top and stem: Die cast aluminum. Diffuser: Acrylic, opal.

Sizes and weight

Width x Height x Length (in.) | 9.8 x 5.8 x 9.8 Max 5.0 lbs | 17.2 x 6.1 x 17.2 Max 9.8 lbs | 26.7 x 6.1 x 26.7 Max 21.3 lbs

Compliance

cULus, Damp location.

Specification notes

a. 9.8 IN size available only in 13W. b. 17.2 IN size available only in 25W. c. 26.7 IN size available only in 54W. d. Tunable white available only in white finish.

Light source

13W LED/3000K
Lumen: 1092

Information

Electrical:
System Wattage: 13W, 25W or 54W
LED Wattage: 12W, 23W, or 50 W
Delivered lumens: 1,092 - 6,262
Efficacy: 84.0 lm/W - 116.0 lm/W
Certifications:
cULus, Damp Location
Protection class IP20
Controllability: 0-10V Dimming
Color Rendering: Ra≥90






Product family



LP Slim Round Semi Recessed



LP Slim Round Recessed




LP Slim Round Surface Mounted




LP Slim Round Wall

Light distribution diagrams


Cartesian

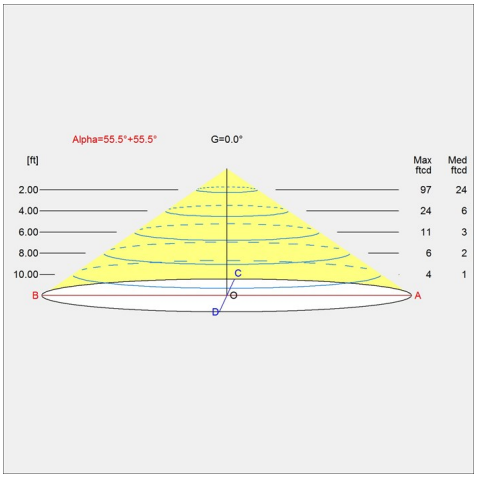

Isolux

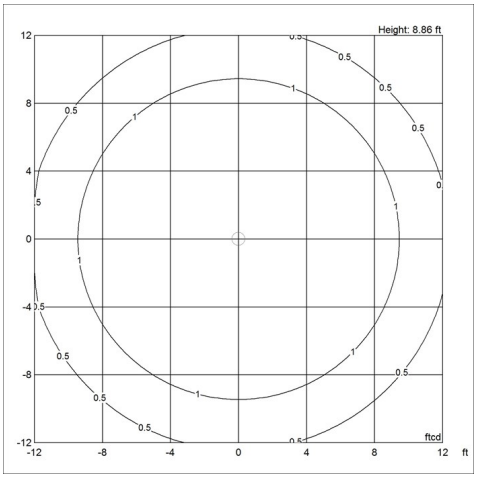

Polar

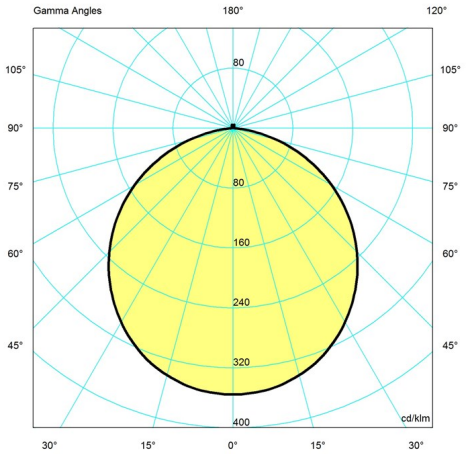

Spare parts & accessories

Product	Variant number
Slim Round Ø680 diffuser opal	5742584627
Slim Round Ø250 diffuser opal	5742584737
Slim Round Ø440 diffuser opal	5742584740

Data specifications

Colour	**Black**	Length	**9.8**
Width	**9.8**	Height	**5.8**
Built-in Height	**366**	IP class	**20**
Class	**-**	Net Weight	**5.0**
Standby (W)	**-**	Power Factor (P = 100 % / P = 50 %)	**0.9**

Inrush Current	**74A/120µs**
Kelvin	**3000**
SDCM	**3**
Watt	**13**
Light control	**Dim 0-10v**
UGR Transversal / Axial	**23.1/23.1**
Driver life	**-**

Light source	**13W LED/3000K**
CRI	**90**
Lumen	**1092**
Efficacy	**84**
Min. Dim Level (%)	**1**
L80B50 (hours)	**-**