











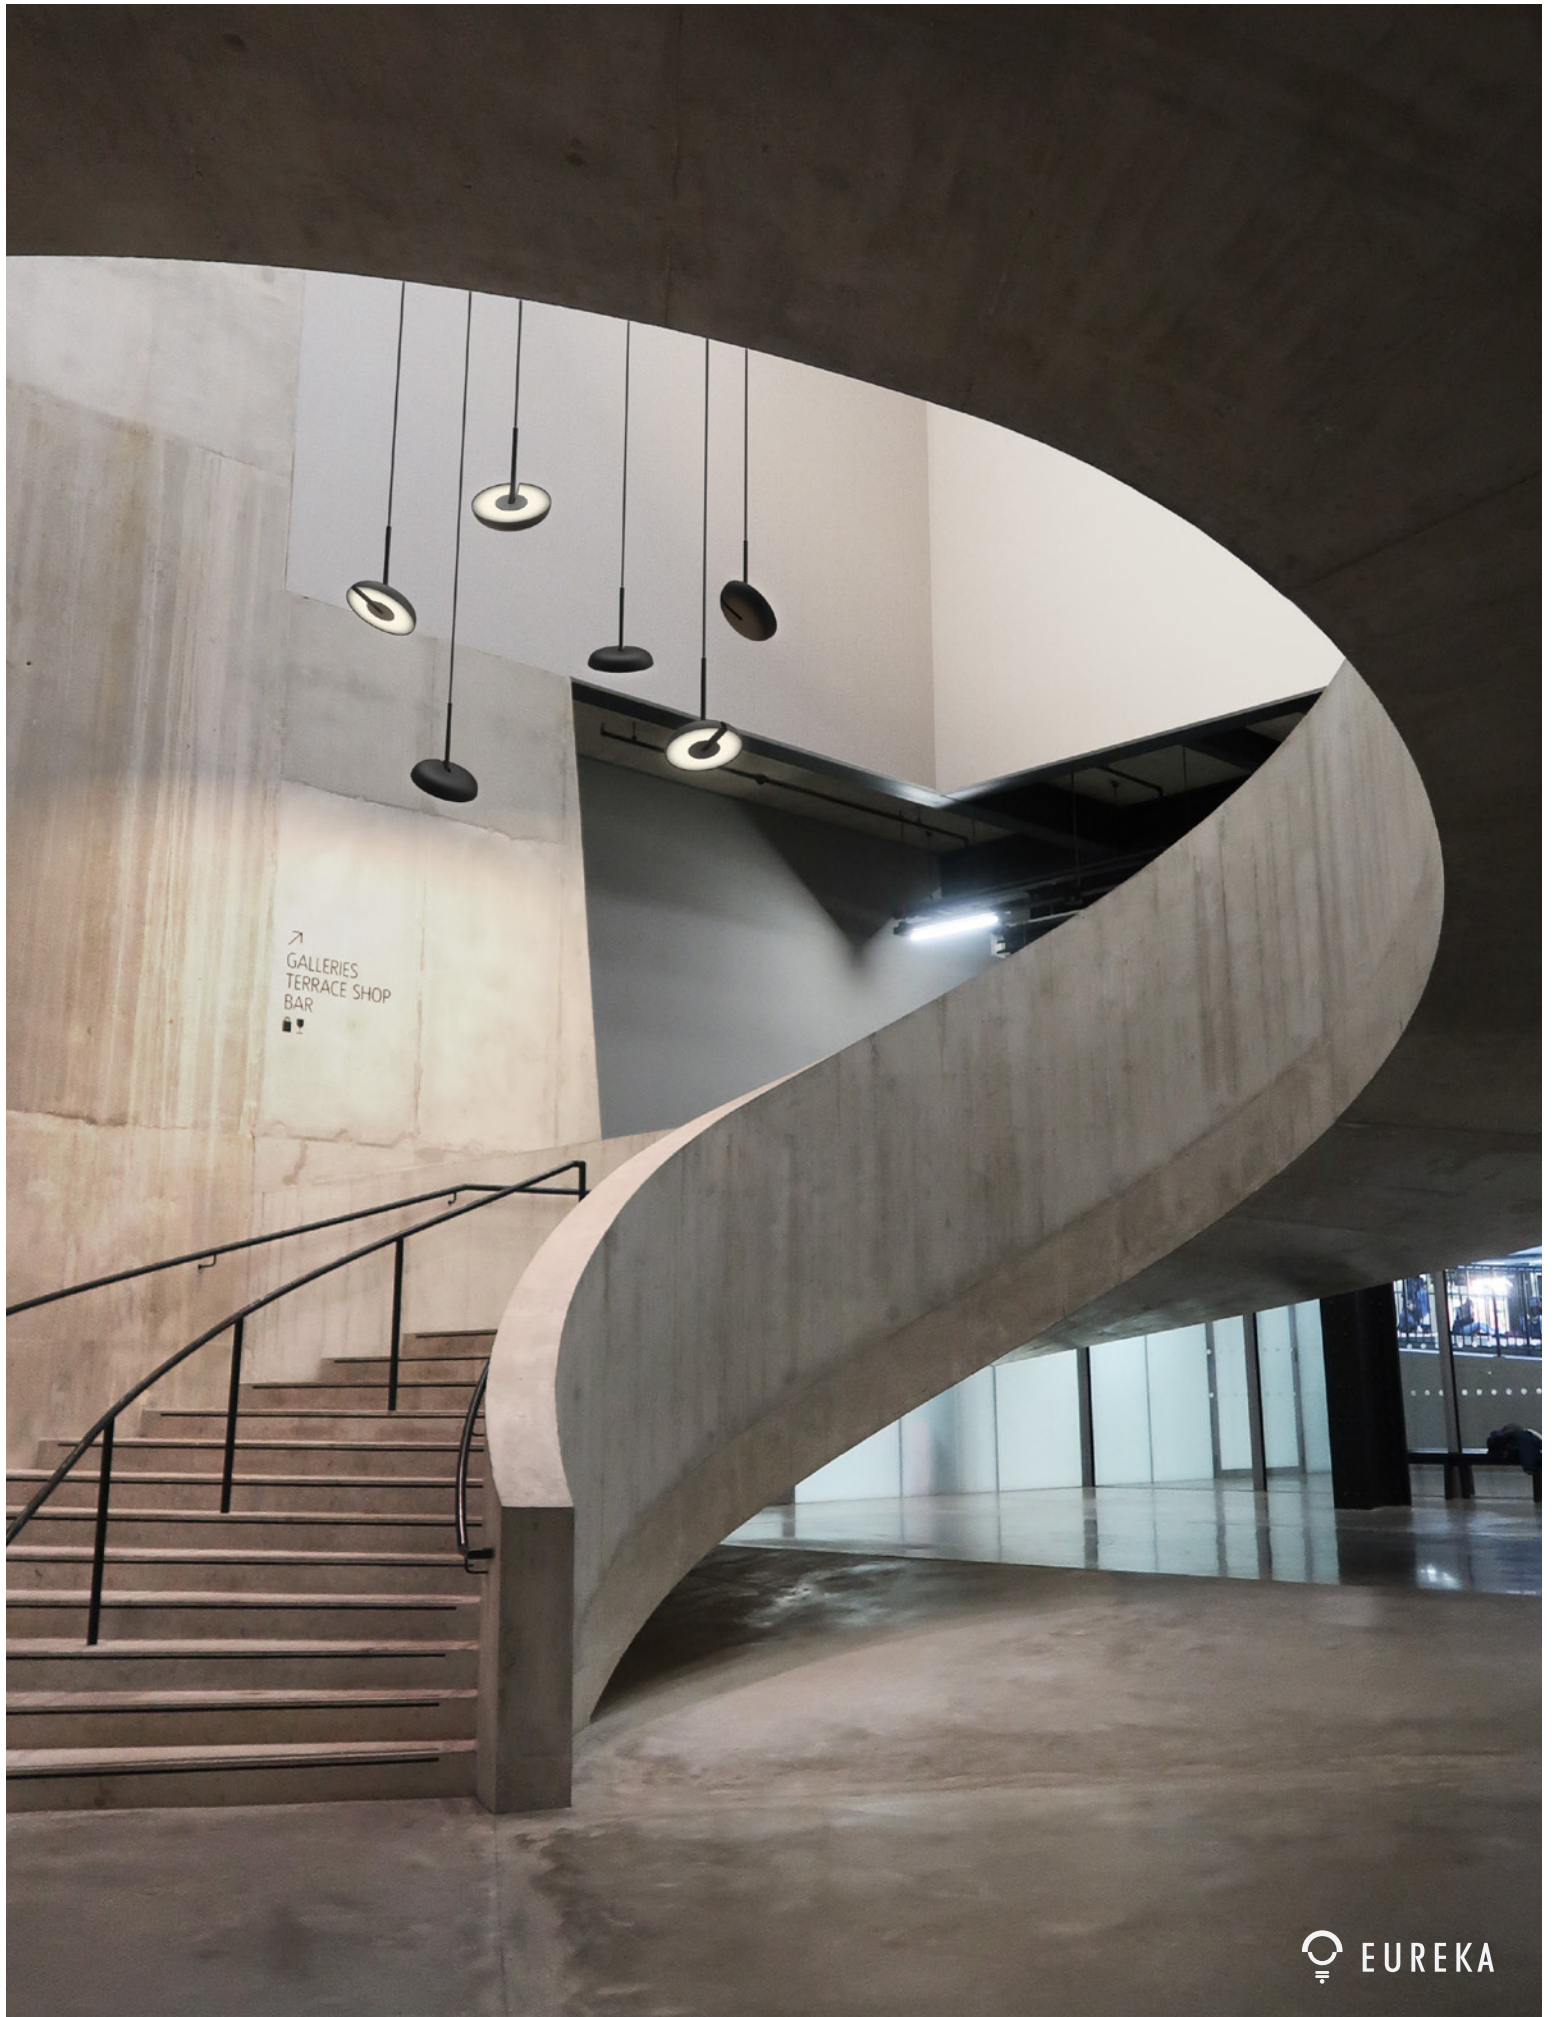

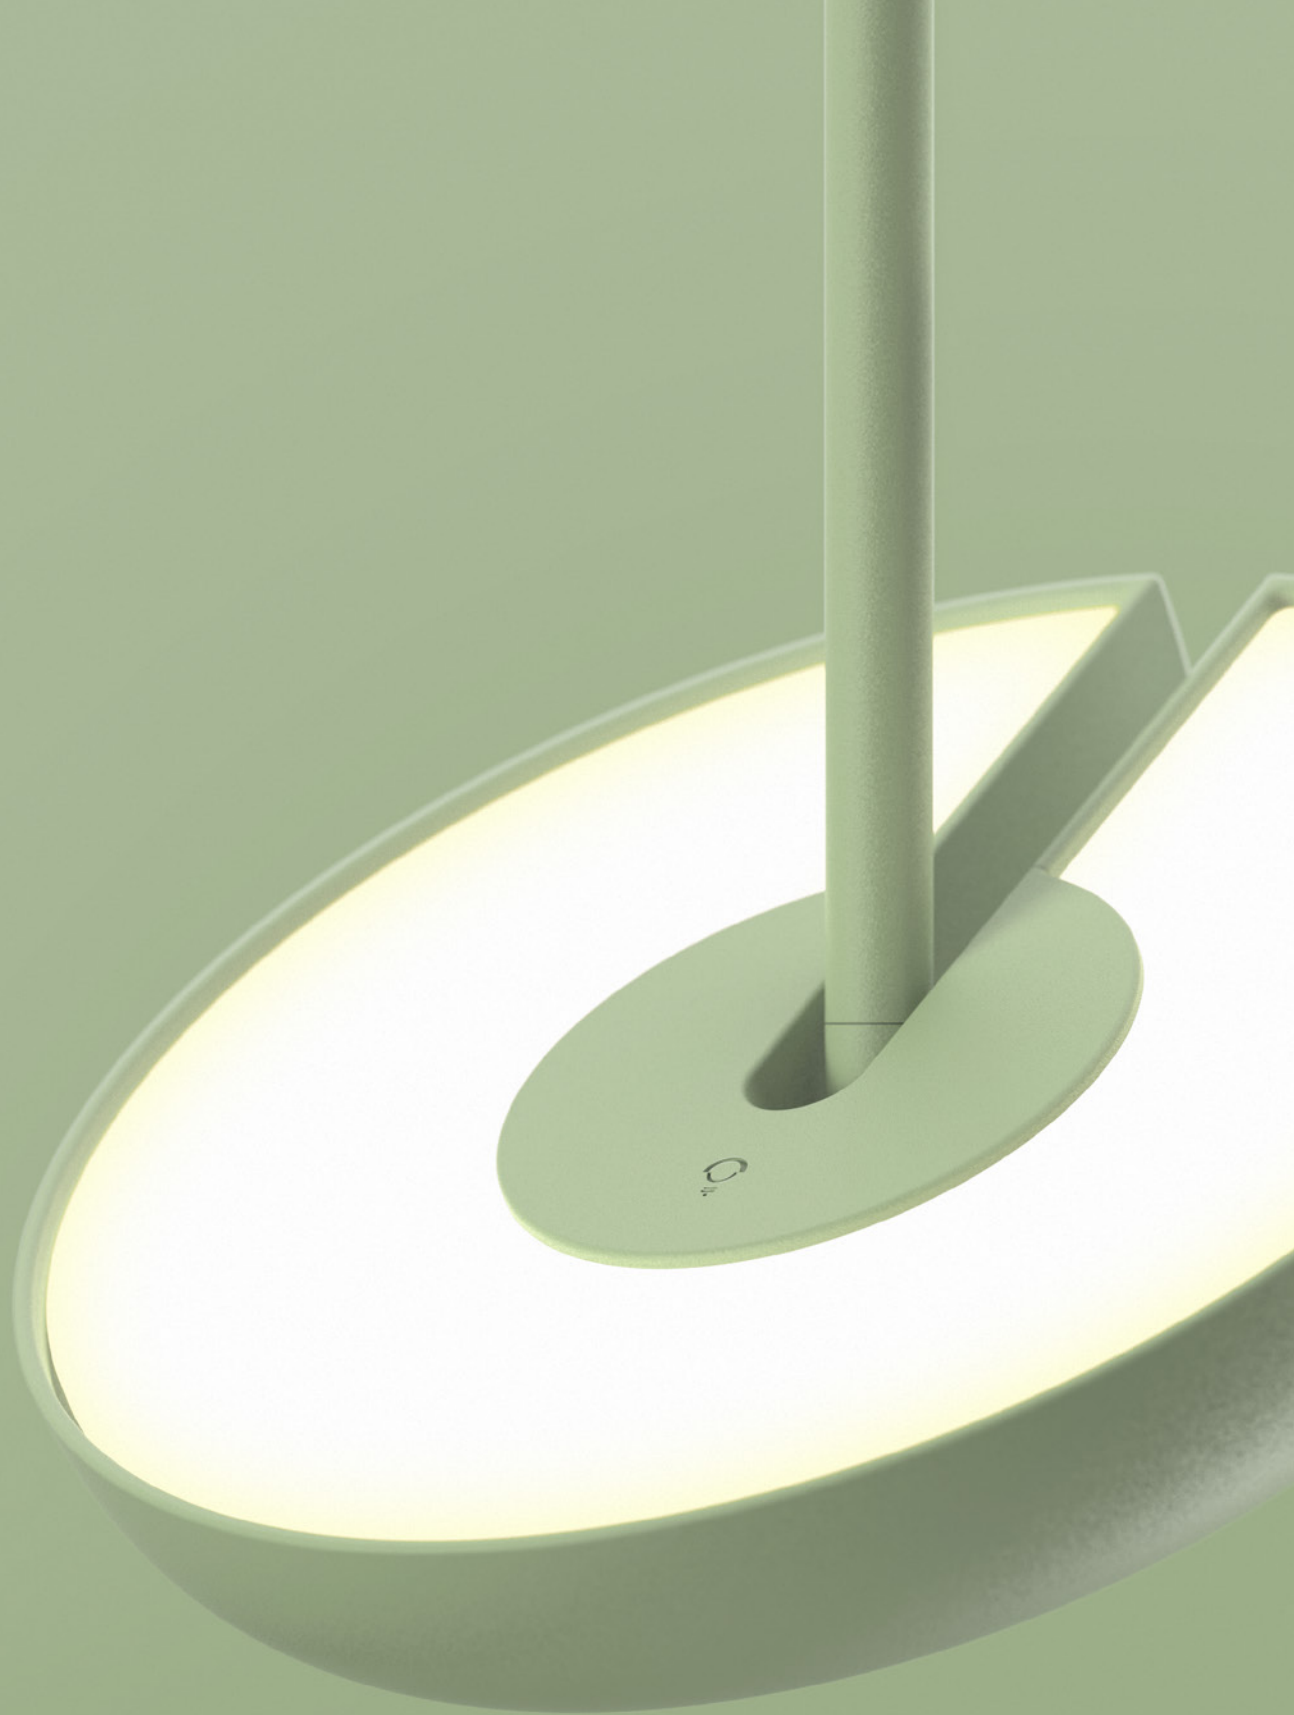

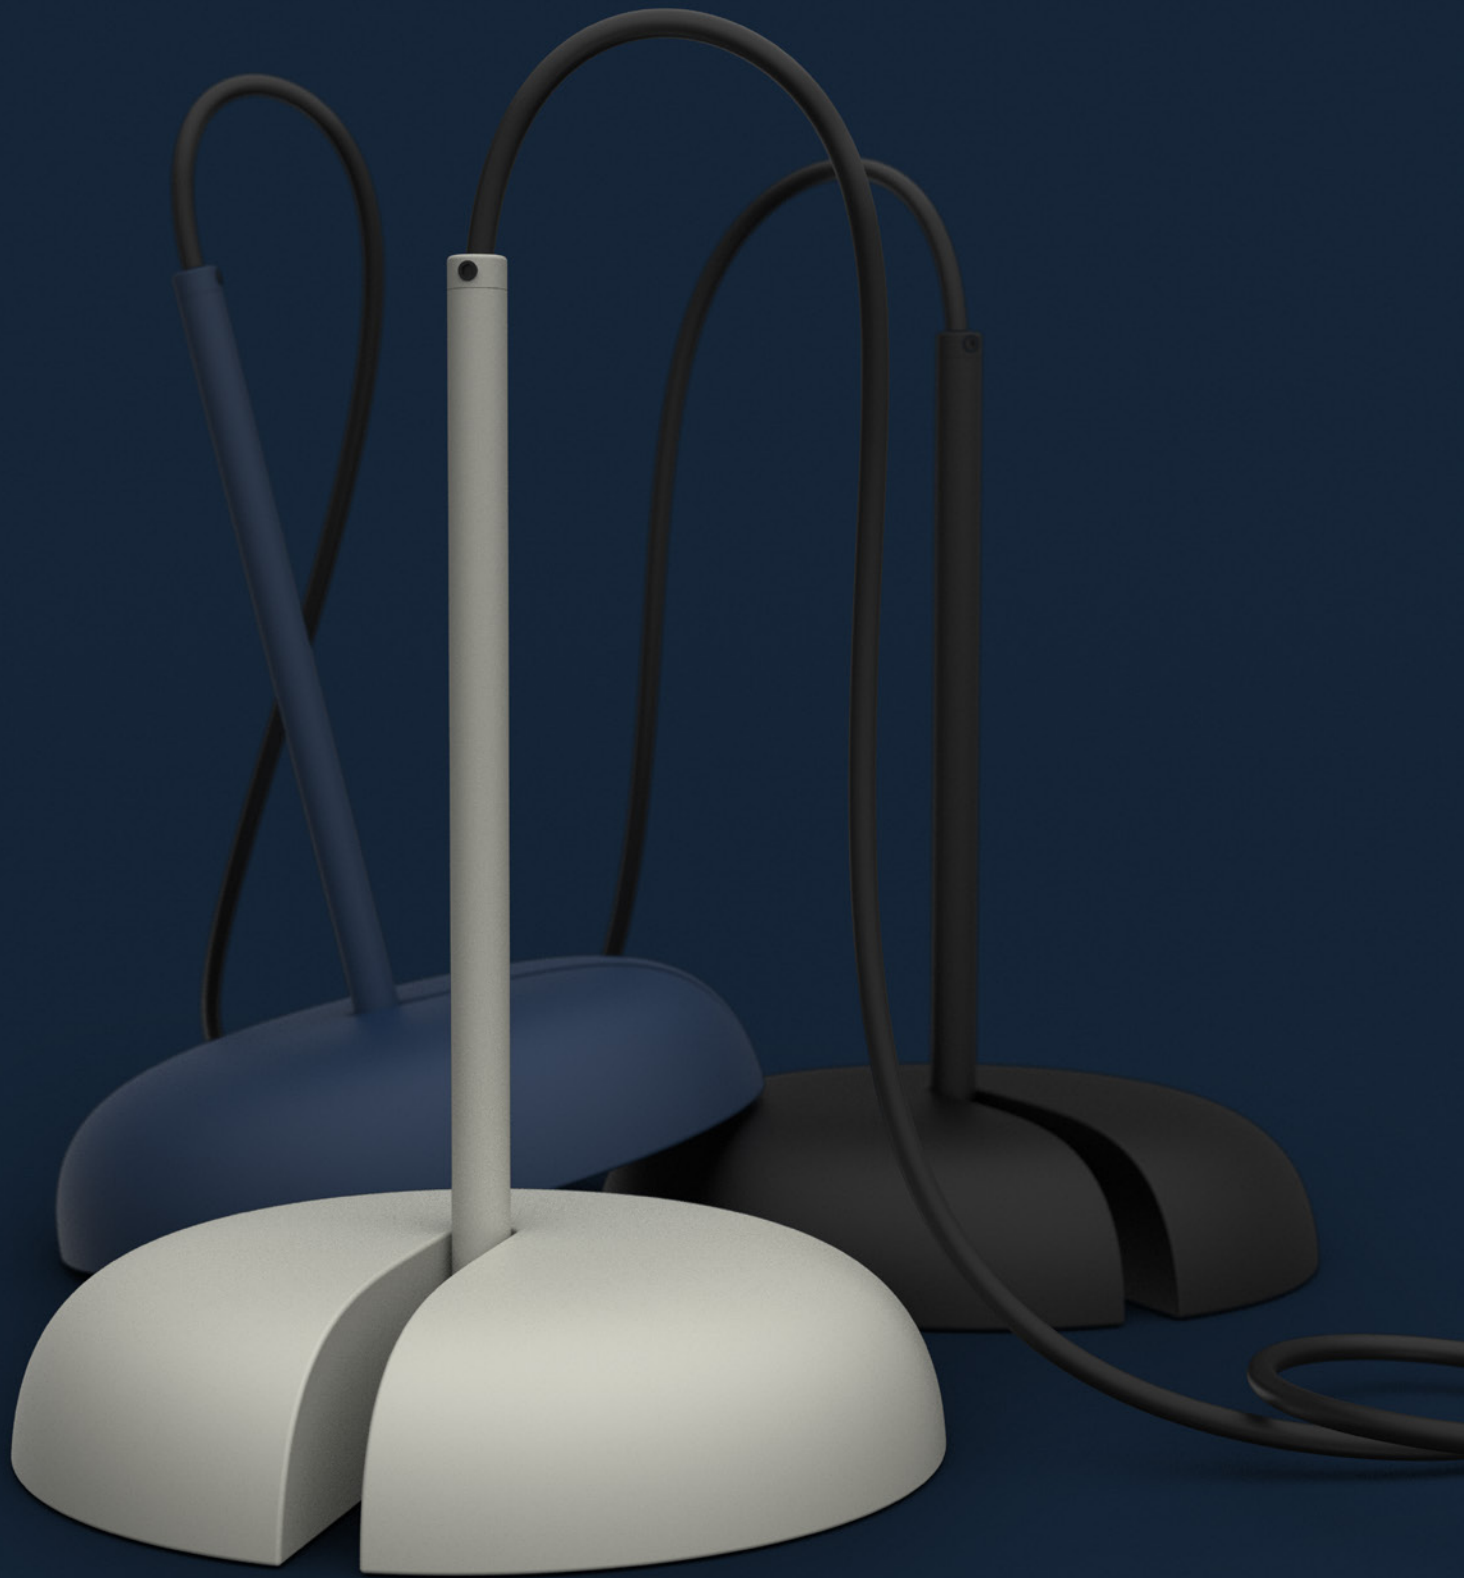



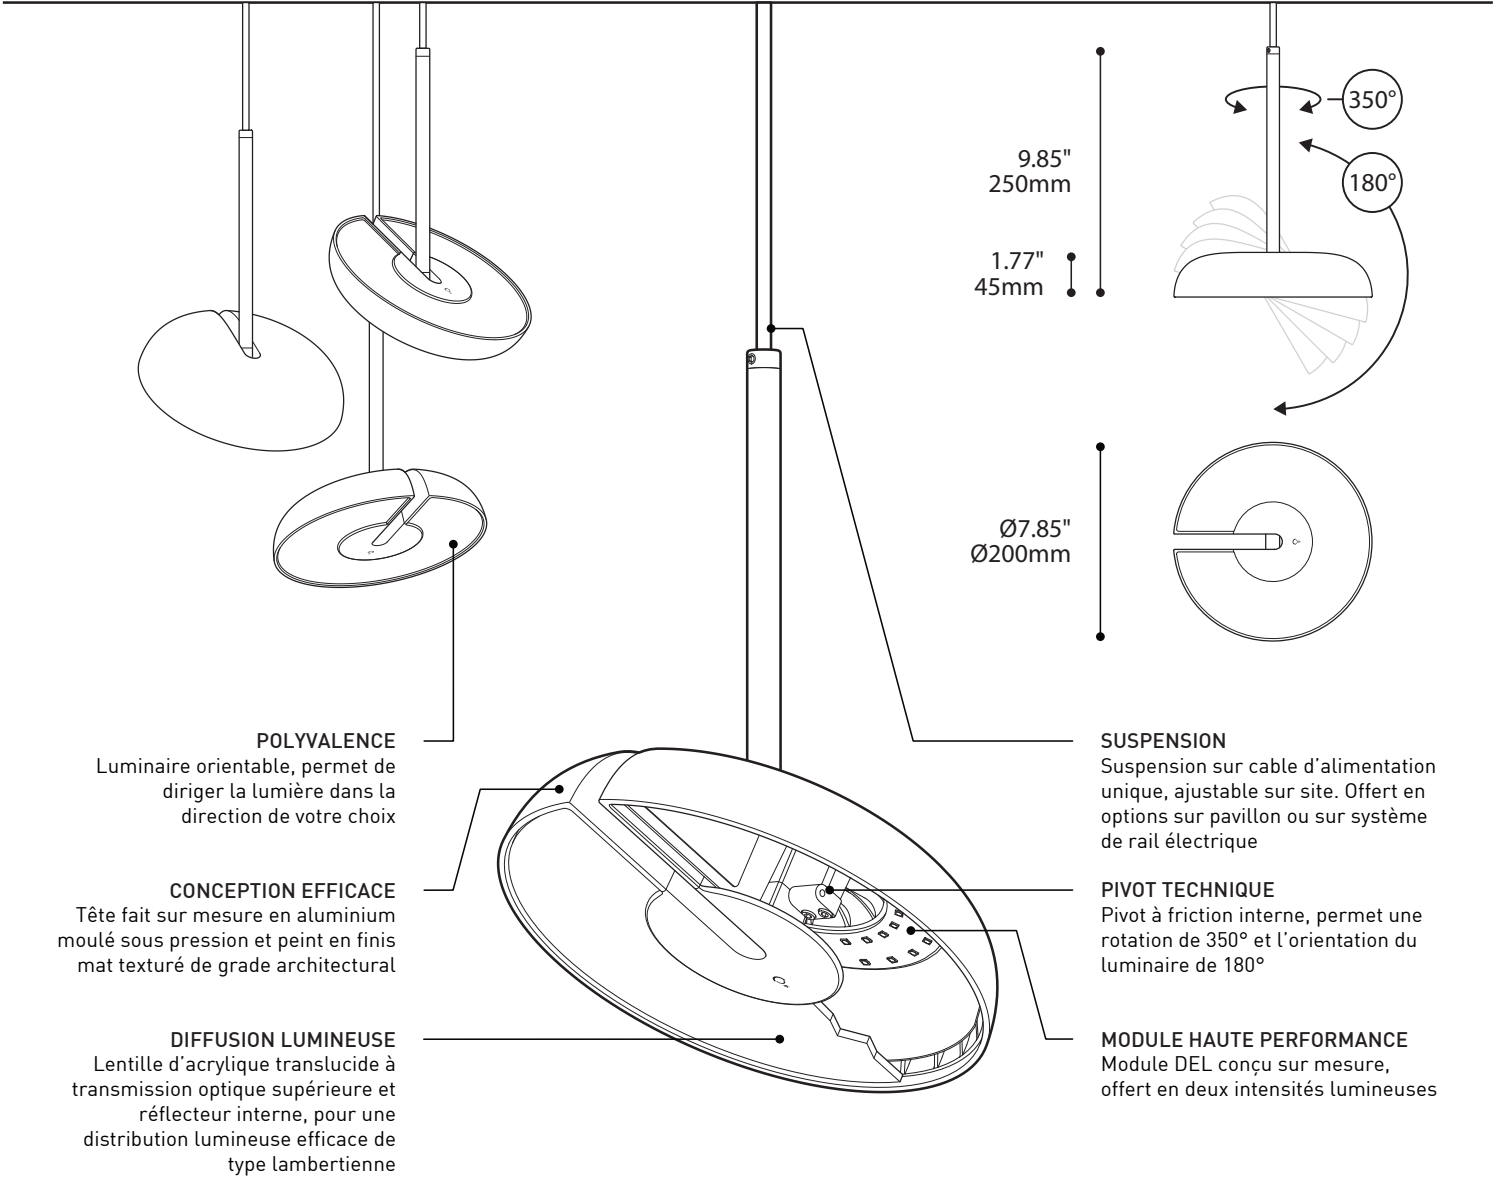

SPÉCIFICATIONS	4040 REG	4040 REG
SOURCE LUMINEUSE	48 x DEL puissance moyenne sur MCPCB	48 x DEL puissance moyenne sur MCPCB
PUISSANCE TOTALE	14W Total	21W Total
LUMENS RÉELS	900 lm (4000K)	1200 lm (4000K)
IRC	80+ IRC ou 90+ CRI	
CCT	2700K, 3000K, 3500K or 4000K 3 ellipses MacAdam	
DISTRIBUTION LUMINEUSE	Directe ou indirecte, orientable	
MODULE	Module DEL design propriétaire reconnu par UL- Fait aux É-U	
ABAT-JOUR	Tête en aluminium coulé sous pression, offert en finis mat texturé vert pâle, bleu marine, noir, gris pâle ou blanc	
STRUCTURE	Tige et pivot en aluminium machiné, le pivot permet une rotation horizontal de 350° et un pivot de 180°	
VOLTAGE	120V ou 277V	
GRADATION	Gradation phase (DP) ou gradation 0-10V (DV); la configuration sur rail n'est offerte qu'en gradation phase	
LM-79	Disponible sur demande	
GARANTIE	5 ans	




LILY 4040



PROJECT	PROJET
SPEC TYPE	
NOTES	



FINISH FINI

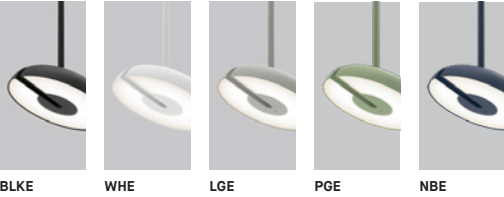

MOUNTING OPTIONS OPTIONS DE MONTAGE

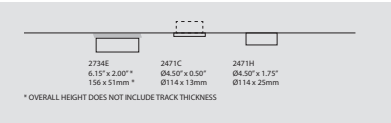

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
MODEL MODÈLE		4040
4040	LILY	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		
80	80+ CRI	
90*	90+ CRI	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V*	277 VOLT	
* NOT AVAILABLE FOR TRACK ADAPTOR		
DIMMING OPTION OPTION DE GRADATION		
DV*	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE		
* NOT AVAILABLE FOR TRACK ADAPTOR		
EMERGENCY BATTERY BATTERIE D'URGENCE		
COMPATIBLE WITH RC MOUNTING ONLY. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.		
EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
* 3981EA ACCESSORY IS REQUIRED		
CABLE CÂBLE		C
C*	BLACK OR WHITE CABLE, FIELD ADJUSTABLE	
* FOR WHITE HEAD FINISH: WHITE CABLE, FOR OTHER HEAD FINISH: BLACK CABLE		
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" CABLE (STD LENGTH)	
**	CUSTOM CBL LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
MOUNTING MONTAGE		
RC1	ROUND CANOPY / PAVILLON ROND	
RC2*	SCREWLESS 1.75" CANOPY (2471H)	
	SCREWLESS 0.5" CANOPY (2471C)	
TA1	TRACK ADAPTOR / ADAPTATEUR DE RAIL	
	1 CIRCUIT	
	LED DIMMING 120V ADAPTOR (2734E)	
* 3983 ACCESSORY IS NECESSARY FOR 2471C		
TRACK ADAPTOR FINISH FINI ADAPTATEUR DE RAIL ^(A)		
BLK	BLACK	
WH	WHITE	
^(A) FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY		
CANOPY FINISH FINI PAVILLON ^(B)		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
^(B) FILL IN IF A CANOPY IS SELECTED, OTHERWISE LEAVE EMPTY		
HEAD FINISH FINI TÊTE ^(C)		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
LGE	LIGHT GREY FINE TEXTURE	
PGE	PALE GREEN FINE TEXTURE	
NBE	NAVY BLUE FINE TEXTURE	
RAL*	PLEASE SPECIFY RAL CODE	
^(C) STEM FINISH IS COLOR MATCHING HEAD FINISH		
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	
ACCESSORY ACCESSOIRE		
3983	DEEP JUNCTION BOX (REQUIRED FOR SCREWLESS 0.5" CANOPY 2471C OPTION)	
EMERGENCY BATTERY ACCESSORY ACCESSOIRE BATTERIE D'URGENCE		



BETTER BOOCH 6
KOMBUCHA
- CITRUS SUNRISE
- GINGERBREAD-SAGE
- GOLDEN PEAR
- TURMERIC + PEARS
- GINGER BOOST
- GINGER-APPLE + MINT
STRAWBERRY MILK 5.50

LAGER 3
OLIVIA TARTAR 4
GG SANDWICH 8/10
TURKEY SANDWICH 8/10
QUICHE 6/8

COFFEE
GUZI ETHIOPIA 5
EL HATO 5
COLUMBIA
MORNING COOP CONGO 5
WINTER BOWL 4.5

COFFEE
ESPRESSO 3
AMERICANO 3
CORTADO 3
CAPPUCCINO 4
LATTE 4-4.5
MOCHA 5
POUR OVER 4-5
COLD BREW 4

4040 LED REG

CCT (K):	4000
Delivered Lumens (lm):	900
System wattage (W)*:	14.1
Distribution:	Direct / Indirect
Delivered Efficacy (lm/W):	63
Photometric type	C



Luminous dimensions

Luminous shape:	Rectangle
Units:	in (mm)
0-180 Axis:	7.874 (200.00)
90-270 Axis:	7.874 (200.00)
Height:	0.000 (0.00)

Luminaire spacing criteria

2 luminaires, plane 0:	1.19
2 luminaires, plane 90:	1.19
4 luminaires:	1.31

*System wattage include driver and LED module consumption

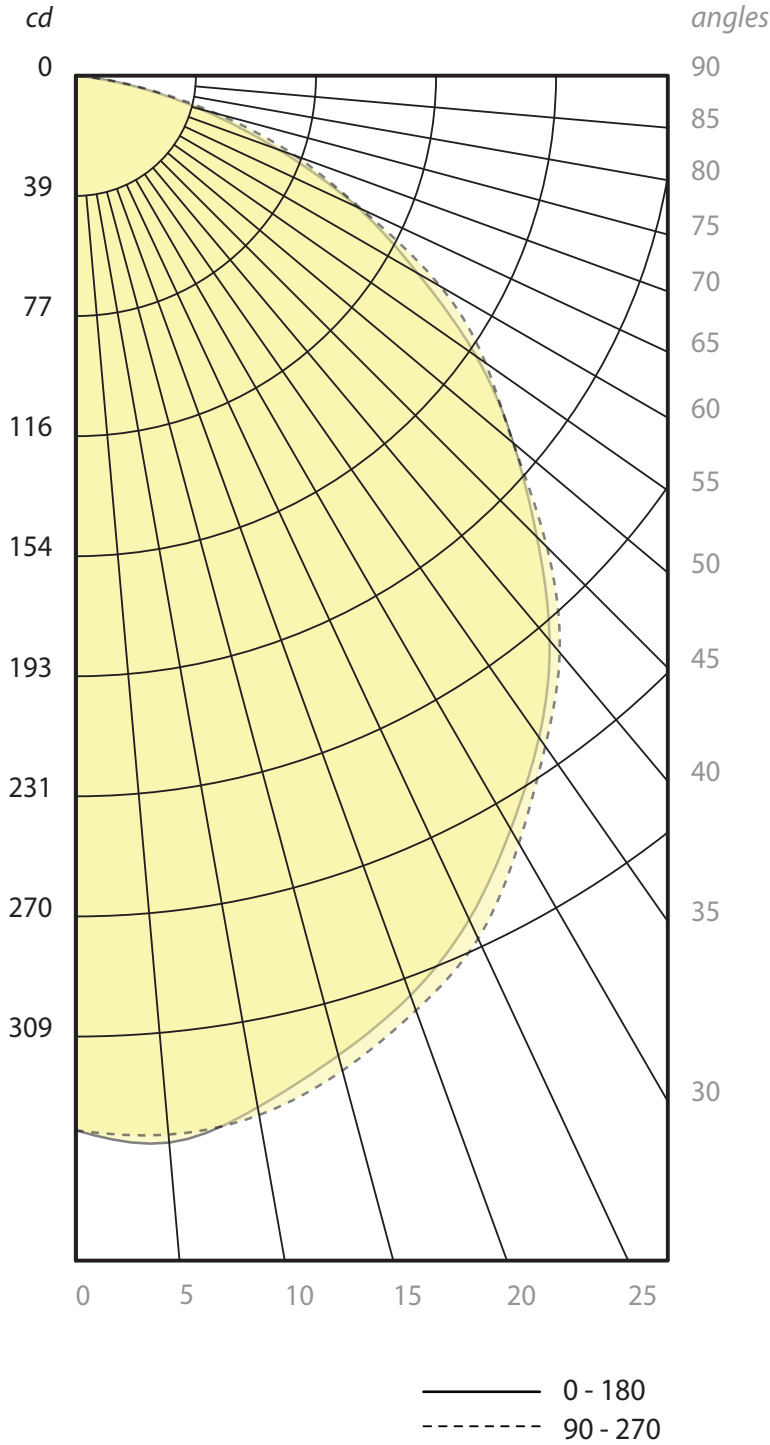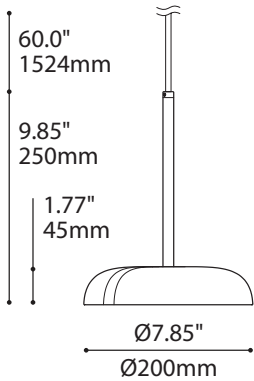

4040 LED HO

CCT (K):	4000
Delivered Lumens (lm):	1200
System wattage (W)*:	20.7
Distribution:	Direct / Indirect
Delivered Efficacy (lm/W):	59
Photometric type	C

Luminous dimensions

Luminous shape:	Rectangle
Units:	in (mm)
0-180 Axis:	7.874 (200.00)
90-270 Axis:	7.874 (200.00)
Height:	0.000 (0.00)

Luminaire spacing criteria

2 luminaires, plane 0:	1.21
2 luminaires, plane 90:	1.21
4 luminaires:	1.32

*System wattage include driver and LED module consumption

