


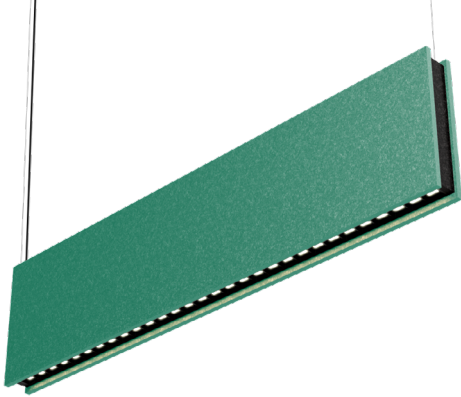

LINEA (LX-LN)



TYPE:

KEY BENEFITS

- Highly effective noise absorption
- Available in multiple lengths, 4 heights and many colors
- 4 available finishes, Basica (flat), Ranura (ribbed), Terrain B (textured), Motif (patterned)
- High performance dimmable LED light sources - direct and/or indirect wash
- Multiple shielding options available - UGR <5 on direct louvered output
- Unique plug and play power connector allows for install of canopy and power before lighting fixture - only one power feed needed per pendant
- Simple connector for easy onsite install of multiple lengths
- Easy cassette style driver servicing factory programmable drivers post install
- IES photometric files / POE available upon request
- Supplied with height adjustable 9'3m black suspension cables

TERRAIN MOTIF Declare.

SIZES

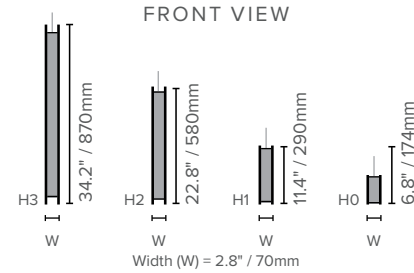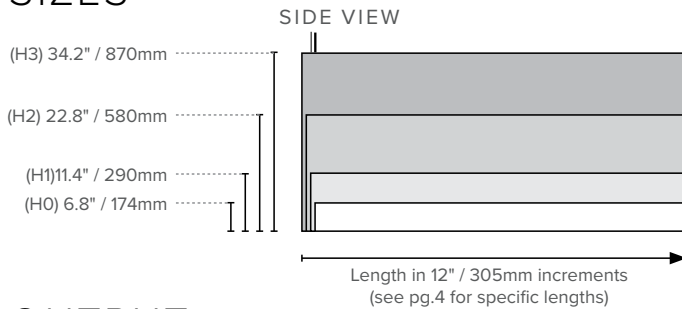

OUTPUT

	DA		DB		DC		I		DIA		DIB		DIC	
Beam Angle (Direct Indirect)	50° (direct)		76° (direct)		100° (direct)		160° (indirect)		50° (direct) - 160° (indirect)		76° (direct) - 160° (indirect)		76° (direct) - 100° (indirect)	
Shielding (down up)	Louvered (direct)		Louvered (direct)		Diffused (direct)		Lensed (indirect)		Louvered (direct) Lensed (indirect)		Louvered (direct) Lensed (indirect)		Diffused (direct) Lensed (indirect)	
UGR (Direct)	<5		<5		-		-		<5		<5		-	
CCT CRI	CCT: 3000K/3500K/4000K CRI >90													
Direct Lumens (per ft per m)	1060 lm/ft	3420 lm/m	1031 lm/ft	3326 lm/m	812 lm/ft	2620 lm/m	0 lm/ft	0 lm/m	1060 lm/ft	3420 lm/m	1031 lm/ft	3326 lm/m	812 lm/ft	2620 lm/m
Indirect Lumens (per ft per m)	0	0	0	0	0	0	965 lm/ft	3113 lm/m	965 lm/ft	3113 lm/m	965 lm/ft	3113 lm/m	965 lm/ft	3113 lm/m
Total Lumens (per ft per m)	1060 lm/ft	3420 lm/m	1031 lm/ft	3326 lm/m	812 lm/ft	2620 lm/m	965 lm/ft	3113 lm/m	2025 lm/ft	6533 lm/m	1996 lm/ft	6439 lm/m	1777 lm/ft	5733 lm/m
Distribution (%)	100% (direct) 0% (indirect)		100% (direct) - 0% (indirect)		100% (direct) - 0% (indirect)		0% (direct) - 100% (indirect)		52% (direct) - 48% (indirect)		52% (direct) - 48% (indirect)		66% (direct) - 54% (indirect)	
Wattage (W per ft per m)	8W	26W	8W	26W	13W	40W	8W	26W	16W	52W	16W	52W	21W	65W
Efficacy (lm/W)	133 lm/W		129 lm/W		67 lm/W		121 lm/W		127 lm/W		125 lm/W		89 lm/W	

Note: See pg. 4 for more detailed output information on specific lengths

ORDER CODE

EXAMPLE: LX - LN - 8 - H2 - B - R - 40 - DIA - U1

(Luxbox Linea , 91" / 2311mm long, Height 2 (22.8" / 580mm), Basica, Red color, 4000K CCT, Direct A (50°, Louvered) - Indirect (160°, Diffused) output, 0-10V 1% dimming 110-277VAC

LX - LN	LENGTH	HEIGHT	PATTERN	COLOR*	COLOR TEMP	OUTPUT***	REGION / DIMMING
LN	Use length code as shown on pg. 4	H0 6.8" / 174mm H1 11.4" / 290mm H2 22.8" / 580mm H3 34.2" / 870mm	B Basica R Ranura	Use color code as shown on pg. 2	30 3000K 35 3500K 40 4000K A** Acoustic only	DA Direct A (50°, Louvered) DB Direct B (76°, Louvered) DC Direct C (100°, Diffused) I Indirect (160°, Lensed) DIA DA (direct) + I (indirect) DIB DB (direct) + i (indirect) DIC DC (direct) + I (indirect)	U1 0-10V - 10% dimming (110 - 277VAC) (North America only) U2 0-10V - 0.1% dimming (110 - 277VAC) (North America only) G DSI / DALI (220 - 240V)

**For acoustic baffle only, specify A in the 'color temp' column and leave the remaining columns blank


***See pg.3 for more information about the different Output options

Luxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. August 2022. LX-Linea-Spec-Sheet-v8.8



LUXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXBOX.COM
 LUXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXBOX.COM
 WWW.LUXBOX.COM






LINEA (LX-LN)

TYPE:

SHIELDING OPTIONS


DIRECT

Louvered
(DA/DB)




DIRECT

Diffused
(DIC)




INDIRECT

Lensed
(I/DIA/DIB/DIC)



DIRECT/INDIRECT

Acoustic Baffle
(A)



AVAILABLE COLORS & PATTERNS

Colors are subject to lead times and variations across batches

SOLID PET COLOR OPTIONS

CORE



Off White (OW)



Light Grey (LG)



Charcoal (C)



Black (B)



Dark Blue (DB)



Light Blue (LB)



Emerald Green (EG)

DESIGNER



White (W)



Mid Grey (MG)



Steel Blue (SB)



Bright Blue (BB)



Turquoise (T)



Light Green (LGR)



Bright Yellow (BY)




Orange (O)




Red (R)

PATTERN OPTIONS

Basica
(B)




Ranura
(R)



Dazzle
(DC)



Lines
(LC)



Moon
(MD)




More printed pattern options are available on the Motif spec sheet.


MOTIF

TERRAIN

B Sienna
(BSI)



A Fern
(AFN)



More color options are available on the Terrain spec sheet.

CLASSIC WOOL COLOR OPTIONS

Only available for 'Basica' option



2S



2R



3E



2T



21



63



13



18



39



90



3D



2W



82



58



2X



1F



1L



53



1K



1M



1N



2Y



3A



3B



2U



3C



02



2Z



33



1P



26



1Y



09



62



1W



1V



1R



1T



31



47



86



2Q



28



1E



1J



12



30



35



67




08

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. August 2022. LX-Linea-Spec-Sheet-v8.8



LUXXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXXBOX.COM
LUXXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXXBOX.COM
WWW.LUXXBOX.COM





LINEA (LX-LN)


TYPE:

PHOTOMETRICS: PER FOOT/METER

IES files can easily be downloaded from our website

	DA		DB		DC		I		DIA		DIB		DIC	
Beam Angle (Direct Indirect)	50° (direct)		76° (direct)		100° (direct)		160° (indirect)		50° (direct) - 160° (indirect)		76° (direct) - 160° (indirect)		76° (direct) - 100° (indirect)	
Shielding (down up)	Louvered (direct)		Louvered (direct)		Diffused (direct)		Lensed (indirect)		Louvered (direct) Lensed (indirect)		Louvered (direct) Lensed (indirect)		Diffused (direct) Lensed (indirect)	
UGR (Direct)	<5		<5		-		-		<5		<5		-	
CCT CRI	CCT: 3000K/3500K/4000K CRI >90													
Direct Lumens (per ft per m)	1060 lm/ft	3420 lm/m	1031 lm/ft	3326 lm/m	812 lm/ft	2620 lm/m	0 lm/ft	0 lm/m	1060 lm/ft	3420 lm/m	1031 lm/ft	3326 lm/m	812 lm/ft	2620 lm/m
Indirect Lumens (per ft per m)	0	0	0	0	0	0	965 lm/ft	3113 lm/m	965 lm/ft	3113 lm/m	965 lm/ft	3113 lm/m	965 lm/ft	3113 lm/m
Total Lumens (per ft per m)	1060 lm/ft	3420 lm/m	1031 lm/ft	3326 lm/m	812 lm/ft	2620 lm/m	965 lm/ft	3113 lm/m	2025 lm/ft	6533 lm/m	1996 lm/ft	6439 lm/m	1777 lm/ft	5733 lm/m
Distribution (%)	100% (direct) 0% (indirect)		100% (direct) - 0% (indirect)		100% (direct) - 0% (indirect)		0% (direct) - 100% (indirect)		52% (direct) - 48% (indirect)		52% (direct) - 48% (indirect)		66% (direct) - 54% (indirect)	
Wattage (W per ft per m)	8W	26W	8W	26W	13W	40W	8W	26W	16W	52W	16W	52W	21W	65W
Efficacy (lm/W)	133 lm/W		129 lm/W		67 lm/W		121 lm/W		127 lm/W		125 lm/W		89 lm/W	

LIGHT DISTRIBUTION

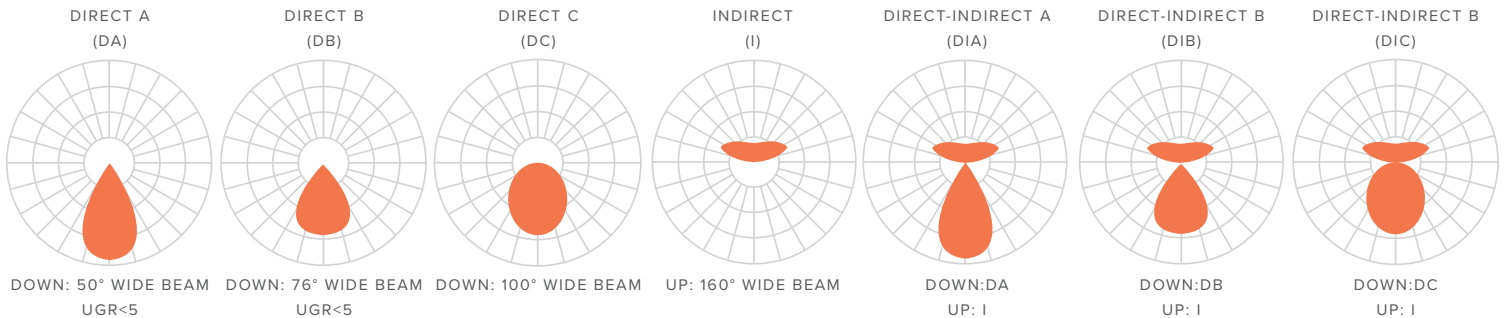

TM-30METRICS


Fidelity Index (Rf): Average similarity to the reference source for all colors

Gamut Index (Rg): Average change in chroma for all colors

	DA/DB/DC/I
Rf (Fidelity Index)	83
Rg (Gamut Index)	96

COLOR VECTOR GRAPHIC

DA/DB/DC/I

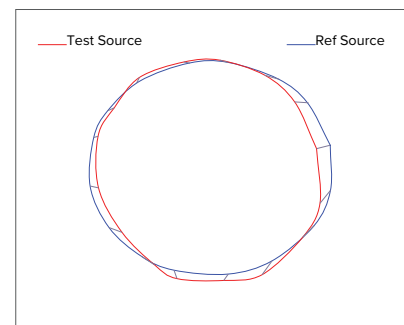


Luxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. August 2022. LX-Linea-Spec-Sheet-v8.8



LUXXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXXBOX.COM
LUXXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXXBOX.COM
WWW.LUXXBOX.COM





LINEA (LX-LN)

TYPE:

PHOTOMETRICS: SPECIFIC LENGTHS


Product Code	Overall Length (in)	Overall Lengths (mm)	DIRECT A (DA) Efficacy: 133lm/W		DIRECT B (DB) Efficacy: 129lm/W		DIRECT C (DC) Efficacy: 67lm/W		INDIRECT (I) Efficacy: 121 lm/W		DIRECT-INDIRECT A (DIA) Efficacy: 127 lm/W		DIRECT-INDIRECT B (DIB) Efficacy: 125 lm/W		DIRECT-INDIRECT C (DIC) Efficacy: 89 lm/W	
			Lumens (lm)	Wattage (W)	Lumens (lm)	Wattage (W)	Lumens (lm)	Wattage (W)	Lumens (lm)	Wattage (W)	Lumens (lm)	Wattage (W)	Lumens (lm)	Wattage (W)	Lumens (lm)	Wattage (W)
2	24	620	2120	16	2062	16	1624	24	1930	16	4050	32	3992	32	3554	40
3	35	900	3180	24	3093	24	2436	36	2895	24	6075	48	5988	48	5331	60
4	46	1180	4240	32	4124	32	3248	48	3860	32	8100	64	7984	64	7108	80
5	57	1460	5300	40	5155	40	4060	60	4825	40	10125	80	9980	80	8885	100
6	69	1741	6360	48	6186	48	4872	72	5790	48	12150	96	11976	96	10662	120
7	80	2021	7420	56	7217	56	5684	84	6755	56	14175	112	13972	112	12439	140
8	91	2301	8480	64	8248	64	6496	96	7720	64	16200	128	15968	128	14216	160
9	102	2600	9540	72	9279	72	7308	108	8685	72	18225	144	17964	144	15993	180
10	115	2920	10600	80	10310	80	8120	120	9650	80	20250	160	19960	160	17770	200
11	124	3161	11660	88	11341	88	8932	132	10615	88	22275	176	21956	176	19547	220
12	136	3442	12720	96	12372	96	9744	144	11580	96	24300	192	23952	192	21324	240
13	147	3722	13780	104	13403	104	10556	156	12545	104	26325	208	25948	208	23101	260
14	158	4002	14840	112	14434	112	11368	168	13510	112	28350	224	27944	224	24878	280
15	169	4282	15900	120	15465	120	12180	180	14475	120	30375	240	29940	240	26655	300
16	180	4562	16960	128	16496	128	12992	192	15440	128	32400	256	31936	256	28432	320
17	191	4862	18020	136	17527	136	13804	204	16405	136	34425	272	33932	272	30209	340
18	202	5143	19080	144	18558	144	14616	216	17370	144	36450	288	35928	288	31986	360
19	214	5423	20140	152	19589	152	15428	228	18335	152	38475	304	37924	304	33763	380
20	225	5703	21200	160	20620	160	16240	240	19300	160	40500	320	39920	320	35540	400
21	236	5983	22260	168	21651	168	17052	252	20265	168	42525	336	41916	336	37317	420
22	247	6263	23320	176	22682	176	17864	264	21230	176	44550	352	43912	352	39094	440
23	258	6543	24380	184	23713	184	18676	276	22195	184	46575	368	45908	368	40871	460
24	269	6823	25440	192	24744	192	19488	288	23160	192	48600	384	47904	384	42648	480
25	280	7124	26500	200	25775	200	20300	300	24125	200	50625	400	49900	400	44425	500
26	291	7404	27560	208	26806	208	21112	312	25090	208	52650	416	51896	416	46202	520
27	302	7664	28620	216	27837	216	21924	324	26055	216	54675	432	53892	432	47979	540
28	314	7964	29680	224	28868	224	22736	336	27020	224	56700	448	55888	448	49756	560
29	325	8244	30740	232	29899	232	23548	348	27985	232	58725	464	57884	464	51533	580
30	336	8524	31800	240	30930	240	24360	360	28950	240	60750	480	59880	480	53310	600
31	347	8825	32860	248	31961	248	25172	372	29915	248	62775	496	61876	496	55087	620
32	358	9105	33920	256	32992	256	25984	384	30880	256	64800	512	63872	512	56864	640
33	369	9385	34980	264	34023	264	26796	396	31845	264	66825	528	65868	528	58641	660
34	381	9665	36040	272	35054	272	27608	408	32810	272	68850	544	67864	544	60418	680
35	392	9945	37100	280	36085	280	28420	420	33775	280	70875	560	69860	560	62195	700
36	403	10225	38160	288	37116	288	29232	432	34740	288	72900	576	71856	576	63972	720
37	414	10505	39220	296	38147	296	30044	444	35705	296	74925	592	73852	592	65749	740
38	425	10785	40280	304	39178	304	30856	456	36670	304	76950	608	75848	608	67526	760
39	436	11065	41340	312	40209	312	31668	468	37635	312	78975	624	77844	624	69303	780
40	447	11345	42400	320	41240	320	32480	480	38600	320	81000	640	79840	640	71080	800

Luxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. August 2022. LX-Linea-Spec-Sheet-v8.8



LUXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXBOX.COM
 LUXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXBOX.COM
 WWW.LUXBOX.COM





LINEA (LX-LN)

TYPE:

MATERIAL SPECIFICATIONS

COLOR FASTNESS TO LIGHT:	ISO 105-B02-1994 Rating: 6-7
FIRE TEST:	AS 1530.3 / ISO 9705: Group 1 / GB8624 B1 / ASTM E-84-14 (Class A, FSI:20 - SDI:450) / BS EN13501-1:2007+A1:2009 (B-s1, d0)
ENVIRONMENTAL:	PET achieves GreenTag Certification / GreenRate: Level A
THERMAL TRANSITION:	ASTM C518-2010. R- Value = 0.30 m ² K/W
SOUND ABSORPTION:	AS ISO 354 – 2006 / Noise reduction coefficient (NRC) = 0.85
VOC EMISSIONS:	ASTM D5116 Rate: < 0.01 mg/m ² /hr (7 days)

Please note some of these certificates will apply to specific colors.

PRODUCT ACOUSTIC PROPERTIES

Testing and post analysis procedures were carried out in accordance with the references detailed below:


AS ISO 354-2006 (R2016)	Acoustics—Measurement of sound absorption in a reverberation room
AS ISO 11654—2002	Rating of sound absorption—Materials and systems
ASTM C423-17	Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
ASTM E795-16	Standard Practices for Mounting Test Specimens During Sound Absorption Tests
ISO 20189	Screens, furniture and single objects intended for interior use – Rating of sound absorption and sound reduction of elements based on laboratory measurements.

The data shown below refers to the testing of LX-LN-8-H3, with a length of 7ft-7in (2301mm) and height of 34.2" (870mm). A fully detailed acoustic test report is available upon request.


Frequency	125	250	500	1000	2000	4000
Sound Absorption Coefficient	0.39	0.84	1.27	1.51	1.67	1.78
SABINS (ft ²)	8.39	18.06	27.31	32.47	35.91	38.27

Frequency	125	250	500	1000	2000	4000
Sound Absorption Coefficient	0.39	0.84	1.27	1.51	1.67	1.78
SABINS (m ²)	0.78	1.68	2.54	3.02	3.34	3.56

Sabins (ft²)

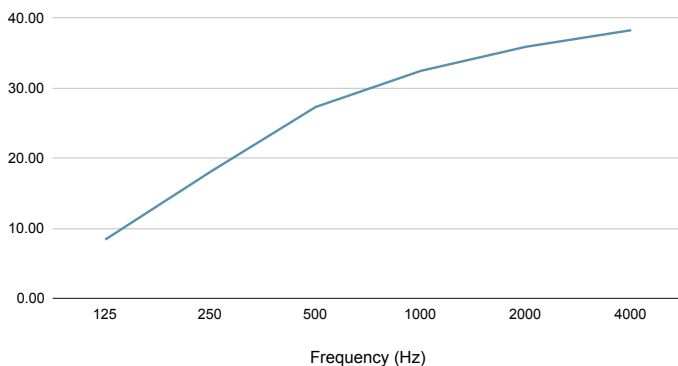

Sabins (m²)

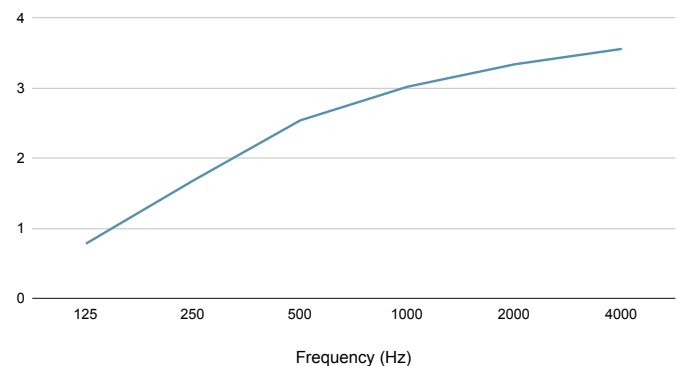

The Sabin data shown above is in accordance with the latest International Standards for the rating of sound absorption and reduction. This is different from the classic methodology, which includes the calculation of the Noise Reduction Coefficient (NRC), the Sound Absorption Average (SAA), the Weighted Sound Absorption Coefficient (**aw**) and the Sound Absorption Class (SAC). However, to make it easier to compare against other products, we are including that information on the table on the right, which was calculated using the Horizontal Floor Area method. Fully detailed test reports are available upon request.


NRC	1.95
SAA	1.93
aw	1.00
SAC	A

Luxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. August 2022. LX-Linea-Spec-Sheet-v8.8



LUXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXBOX.COM
 LUXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXBOX.COM
 WWW.LUXBOX.COM





LINEA (LX-LN)

TYPE:

PRODUCT CONFIGURATION

Product Code	Overall Length (ft-in)	Overall Length (in)	Overall Lengths (mm)	Configuration	Number of fittings	Suspension Points
2	2ft-0in	24	620	2S	1	2
3	2ft-11in	35	900	3S	1	2
4	3ft-10in	46	1180	4S	1	2
5	4ft-9in	57	1460	5S	1	2
6	5ft-9in	69	1741	6S	1	2
7	6ft-8in	80	2021	7S	1	2
8	7ft-7in	91	2301	8S	1	2
9	8ft-6in	102	2600	5P - 4E	2	4
10	9ft-7in	115	2920	5P - 5E	2	4
11	10ft-4in	124	3161	6P - 5E	2	4
12	11ft-4in	136	3442	6P - 6E	2	4
13	12ft-3in	147	3722	7P - 6E	2	4
14	13ft-2in	158	4002	7P - 7E	2	4
15	14ft-1in	169	4282	8P - 7E	2	4
16	15ft-0in	180	4562	8P - 8E	2	4
17	15ft-11in	191	4862	6P - 5M - 6E	3	6
18	16ft-10in	202	5143	6P - 6M - 6E	3	6
19	17ft-10in	214	5423	6P - 7M - 6E	3	6
20	18ft-9in	225	5703	6P - 8M - 6E	3	6
21	19ft-8in	236	5983	7P - 7M - 7E	3	6
22	20ft-7in	247	6263	7P - 8M - 7E	3	6
23	21ft-6in	258	6543	8P - 7M - 8E	3	6
24	22ft-5in	269	6823	8P - 8M - 8E	3	6
25	23ft-4in	280	7124	7P - 6M - 6M - 6E	4	8
26	24ft-3in	291	7404	7P - 6M - 6M - 7E	4	8
27	25ft-2in	302	7664	7P - 7M - 7M - 6E	4	8
28	26ft-2in	314	7964	7P - 7M - 7M - 7E	4	8
29	27ft-1in	325	8244	8P - 7M - 7M - 7E	4	8
30	28ft-0in	336	8524	8P - 7M - 7M - 8E	4	8
31	28ft-11in	347	8825	6P - 6M - 7M - 6M - 6E	5	10
32	29ft-10in	358	9105	7P - 6M - 6M - 6M - 7E	5	10
33	30ft-9in	369	9385	6P - 7M - 7M - 7M - 6E	5	10
34	31ft-9in	381	9665	7P - 7M - 6M - 7M - 7E	5	10
35	32ft-8in	392	9945	7P - 7M - 7M - 7M - 7E	5	10
36	33ft-7in	403	10225	7P - 7M - 8M - 7M - 7E	5	10
37	34ft-6in	414	10505	8P - 7M - 7M - 7M - 8E	5	10
38	35ft-5in	425	10785	7P - 8M - 8M - 8M - 7E	5	10
39	36ft-4in	436	11065	8P - 8M - 7M - 8M - 8E	5	10
40	37ft-3in	447	11345	8P - 8M - 8M - 8M - 8E	5	10

SINGLE POWER FEED

Unique plug and play power connector allows for install of canopy and power before lighting fixture - only one power feed needed per pendant.

MODULE

Each pendant from 24" to 91" consists of a single stand-alone fitting. Longer pendants will be assembled using multiple fittings. See below legend for the codes used in the Configuration column:

- S: Stand Alone fitting
- P: Powered End fitting
- E: Unpowered End fitting
- M: Middle fitting

ACOUSTIC BAFFLES

For an unlit acoustic baffle we will use the same modules and dimensions as with the lit pendants. Instead of a Powered End fitting at the beginning of the run, we will use an Unpowered End fitting. Please note no canopy will be supplied with any acoustic baffle.

DOUBLE CEILING MOUNT

To make installation fast and safe, the Linea pendants above 91" will be supplied with a Double Ceiling Mount. This means you'll be able to fix two suspension cables to one ceiling mount, which decreases the installation time significantly.

EMERGENCY MODULES

Emergency modules can be supplied as a custom option for the Linea Range. If this is the case, the configuration of the full run will require two independently powered ends, one at each end:

P-M-M- ...-M-P


Please contact us if your project requires a more custom configuration.

Luxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. August 2022. LX-Linea-Spec-Sheet-v8.8



LUXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXBOX.COM
LUXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXBOX.COM
WWW.LUXBOX.COM





LINEA (LX-LN)


TYPE:

FITTING DIMENSIONS

STANDALONE (S)

Fitting Code	Overall Length (ft-in)	Overall Length (in)	Overall Length (mm)
2S	2ft-0.5in	24	620
3S	2ft-11.5in	35	900
4S	3ft-10.5in	46	1180
5S	4ft-9.5in	57	1460
6S	5ft-8.6in	69	1741
7S	6ft-7.6in	80	2021
8S	7ft-6.6in	91	2301


SUSPENSION POINT LOCATIONS
STANDALONE (S)

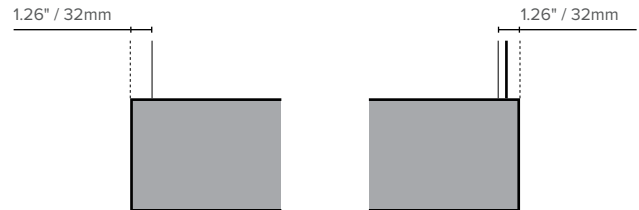

POWERED AND UNPOWERED END (P/E)

Fitting Code	Overall Length (ft-in)	Overall Length (in)	Overall Length (mm)
2P/2E	1ft-11.7in	24	600
3P/3E	2ft-10.7in	35	880
4P/4E	3ft-9.7in	46	1160
5P/5E	4ft-8.7in	57	1440
6P/6E	5ft-7.8in	69	1721
7P/7E	6ft-6.8in	80	2001
8P/8E	7ft-5.9in	91	2281

SUSPENSION POINT LOCATIONS
POWERED (P) AND UNPOWERED END (E)

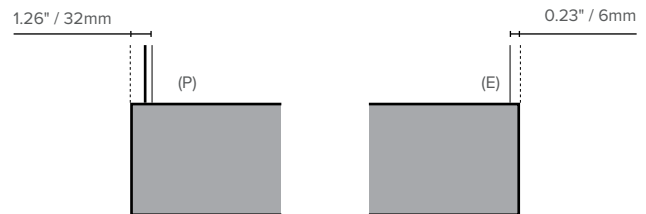

Note: The distance from the edge of the fixture to the suspension point is the same whether the End fitting is powered or unpowered

MIDDLE (M)

Fitting Code	Overall Length (ft-in)	Overall Length (in)	Overall Length (mm)
2M	1ft-10.9in	24	580
3M	2ft-9.9in	35	860
4M	3ft-8.9in	46	1140
5M	4ft-8in	57	1420
6M	5ft-7in	69	1701
7M	6ft-6in	80	1981
8M	7ft-5.1in	91	2261


SUSPENSION POINT LOCATIONS
MIDDLE (M)



FITTING CONNECTIONS

Our Linea range uses UL listed, pre-assembled connectors designed for a safe and fast installation. These connectors are used between Linea modules, and also for the power line. These can be shipped in advance together with the canopy.

The color and mechanical coding will ensure a fast error-free installation, including protection against mismatching, rendering the Linea system as a plug-and-play installation and reducing dramatically installation times.

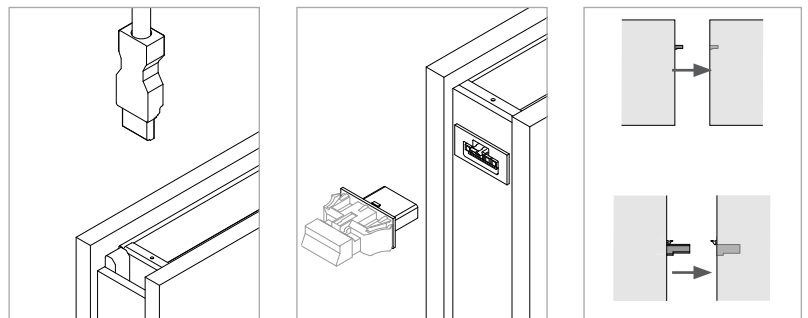


Luxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. August 2022. LX-Linea-Spec-Sheet-v8.8



LUXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXBOX.COM
LUXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXBOX.COM
WWW.LUXBOX.COM





LINEA (LX-LN)

TYPE:

DRIVER INFORMATION

Product Code		U1: 0-10V - 10% dimming (110 - 277V/AC) (North America only)				
		DA/DB/DC/I		DIA/DIB/DIC		COMPLIANCE
		Max Wattage	Max Output	Max Wattage	Max Output	
LX-LN-2	31.5W	27-42V	52.5W	27-42V	 	
LX-LN-3	31.5W		52.5W			
LX-LN-4	44.1W		63W			
LX-LN-5	44.1W		88.2W			
LX-LN-6	52.5W		105W			
LX-LN-7	63W		126W			
LX-LN-8	63W		126W			

		U2: 0-10V - 0.1% dimming (110 - 277VAC) (North America only)					
		DA/DB/DC/I		DIA/DIB/DIC		COMPLIANCE	
Product	Code	Max Wattage	Max Output	Max Wattage	Max Output		
LX-LN-2		30W	2-55V	75W	2-55V		
LX-LN-3		30W		75W			
LX-LN-4		30W		75W			
LX-LN-5		30W		150W			
LX-LN-6		75W		150W			
LX-LN-7		75W		150W			
LX-LN-8		75W		150W			


		U1: 0-10V - 10% dimming (110 - 277VAC) (North America only)					
		DA/DB/DC/I		DIA/DIB/DIC		COMPLIANCE	
Product	Code	Max Wattage	Max Output	Max Wattage	Max Output		
LX-LN-2		55.3W	60V	55.3W	60V	      	
LX-LN-3		55.3W		55.3W			
LX-LN-4		55.3W		83.2W			
LX-LN-5		55.3W		110.6W			
LX-LN-6		83.2W		164.4W			
LX-LN-7		83.2W		164.4W			
LX-LN-8		83.2W		164.4W			

CANOPY INFORMATION

Please note power cord and canopy will always be supplied in black unless specified otherwise.

As you can see on the diagram on the right, Linea pendants are supplied with a canopy that includes both a Power Cable and a Suspension Cable.

The Suspension Cable is centered with the canopy for an easier installation. Please note the Canopy and Power cable can be shipped in advance if needed. You will find more detailed information about the suspension point locations on pg. 7

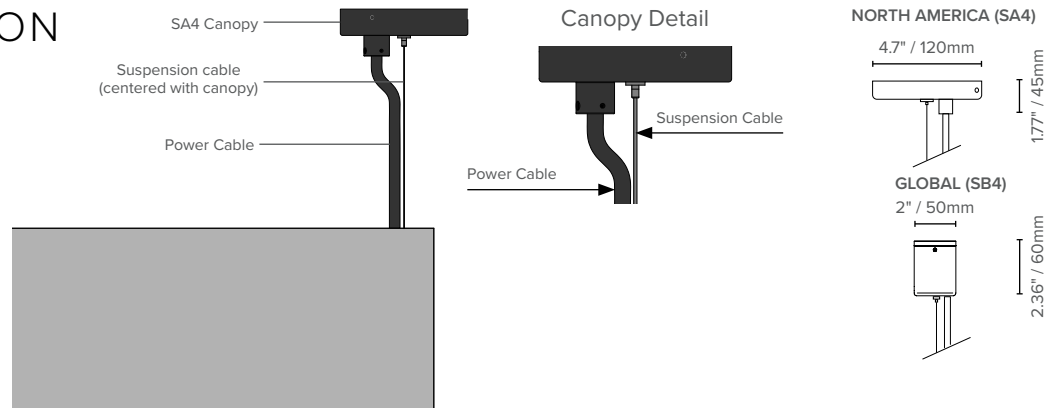

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. August 2022. LX-Linea-Spec-Sheet-v8.8



LUXXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXXBOX.COM
 LUXXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXXBOX.COM
 WWW.LUXXBOX.COM

