

MEHA 4029-UAC / FACET 4029-UFC

PROJECTPROJET

SPEC TYPE

NOTES



OVERALL HEIGHTHAUTEUR HORS TOUT

LIGHT SOURCE	LED TRACK 1 CIRCUIT	LED*	LED DIM*
MOUNTING	2734E	2401C	2403G
CABLE	66.80"	65.85"	67.10"



*FOR CABLE ≤12IN -CANOPY 2401C + ACCESSORY 3983

MOUNTING OPTIONSOPTIONS DE MONTAGE

2734E 6.15" x 2.00" 156 x 51mm	2401C Ø4.50" x 0.50" Ø114 x 12.7mm	2403G Ø4.50" x 1.75" Ø114 x 44mm
--------------------------------------	--	--

* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS

STEM OR CABLE OPTIONSOPTIONS DE TIGE OU CABLE

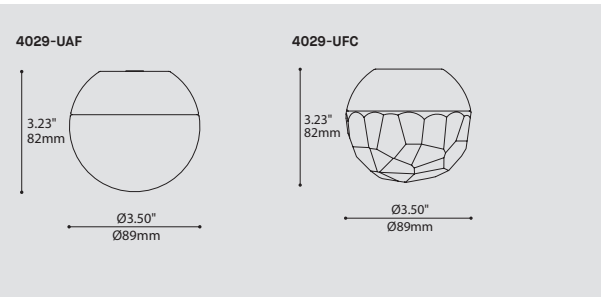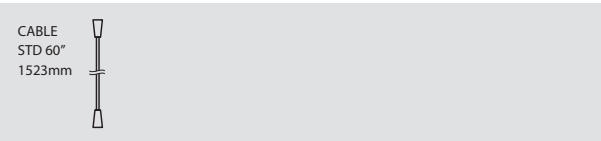


ORDERING SPECIFICATIONSPÉCIFICATION DE COMMANDE		CODE
MODEL	MODÈLE	
4029-UAC	MEHA	
4029-UFC	FACET	
LIGHT SOURCESOURCE LUMINEUSE		
(WATTAGE, LAMP TYPE, OTHER INFO)		
LED.1		1W, LED
LED.4		4W, LED
LIGHT SOURCESOURCE LUMINEUSE		
(WATTAGE, LAMP TYPE, OTHER INFO)		
30		3000K
35		3500K
40		4000K
VOLTAGEVOLTAGE		
120V		120 VOLT
277V*		277 VOLT
*NOT AVAILABLE WITH TRACK ADAPTATOR		
DIMMING OPTIONOPTION DE GRADATION		
FOR LED 4W ONLY		
DV*		0-10V DIMMING (120-277V)
DP		PHASE DIMMING (120V ONLY)
*NOT AVAILABLE WITH TRACK ADAPTATOR		
CABLECABLE		C
C		CLEAR CABLE, FIELD ADJUSTABLE
CABLE LENGTHLONGUEUR DE CABLE		
60		60" CABLE (STD LENGHT)
**		CUSTOM CABLE LENGH (PLEASE SPECIFY)*
*3983 ACCESSORY PROVIDED FOR CABLE ≤ 12"		
*MAX CABLE LENGTH 120" FOR NON-DIMMING		
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
MOUNTINGMONTAGE		
RC		ROUND CANOPY / PAVILLON ROND FOR NON-DIMMING LED & CABLE ≤ 12" : 0.50" CANOPY (2401C) FOR DIMMING LED: 1.50" CANOPY (2403G)
TA1		TRACK ADAPTOR / ADAPTATEUR DE RAIL 1 CIRCUIT LED DIMMING & NON-DIMMING 120V ADAPTOR (2734E)
TRACK ADAPTOR FINISHFINI ADAPTATEUR DE RAIL ^(A)		
WH		WHITE
BLK		BLACK
^(A) FILL IN IF A TRACK ADAPTATOR IS SELECTED, OTHERWISE LEAVE EMPTY		
STRUCTURE FINISHFINI STRUCTURE		S C
S C		SATIN CHROME
HEATSINK FINISHFINI RADIATEUR		SAA
SAA		SATIN ALUMINUM ANODIZED
DIFFUSER FINISHFINI DIFFUSEUR		
CLR		CLEAR
FRO		FROSTED
ACCESSORYACCESSOIRE		
3983		DEEP JUNCTION BOX FOR CABLE ≤ 12" AS PER ABOVE

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT


- BIM
- DIM
- IES
- LED

DESIGN:	Meha and her edgy sister, Facet, are decorative spheres of light that can be used as single elegant geometrical objects to punctuate a space or in multiples to create illuminated clouds and populate larger areas.
STRUCTURE:	Satin aluminum anodized heat sink and heavy pressed glass diffuser with smooth (UAC) or faceted (UFC) surface.
CERTIFIED:	c-CSA-us


4029-UAC





4029-UFC



4529-UAC



4529-UFC

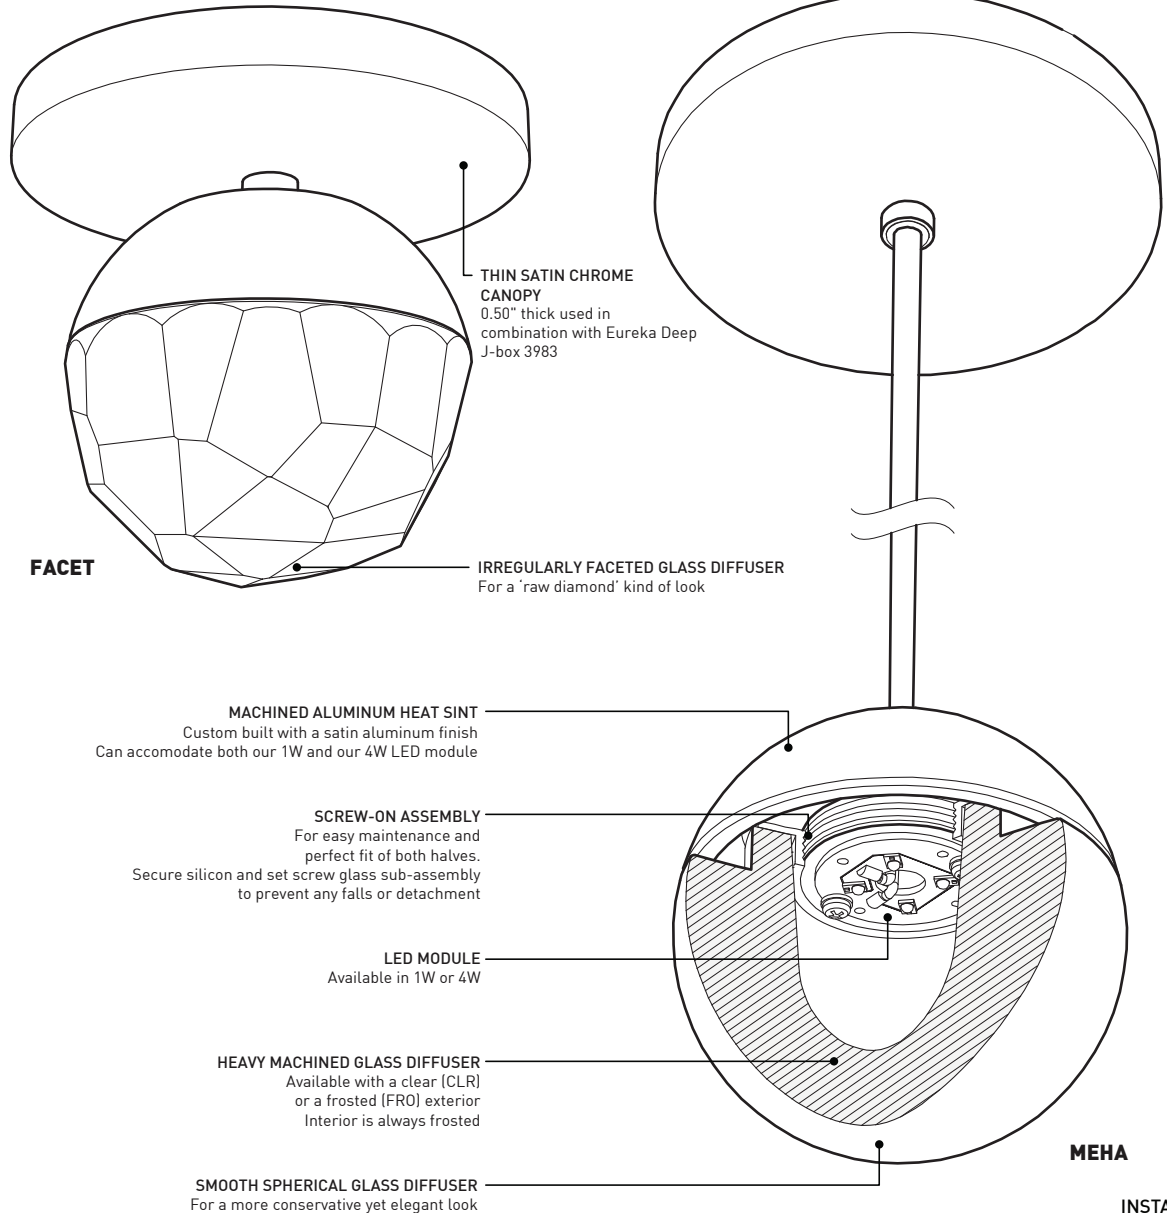

SPECIFICATIONS

LIGHT SOURCE

MODULE

DELIVERED LUMENS

CRI

LIGHT DISTRIBUTION

HEATSINK

DIFFUSER

VOLTAGE

DRIVER

DIMMING

LM-79

WARRANTY

CERTIFICATION

1W LED

1 x high powered LEDs on MCPCB - total ± 1 w

UL recognized - made in USA

105 lm (4000K)

80 CRI (typical)

Direct

Machined aluminum with satin aluminum finish

Heavy machined glass available in clear-frost (CLR) and frost (FRO) and smooth (UAC) or faceted (UFC)

120V (DP) or 120-277V (DV or non-dimming)

Constant Current driver 350 mA, UL Recognized

Phase Dimming (DP) and 0-10V Dimming (DV)

On request

5 years (on electronic components)

CSA recognized

4W LED

4 x high powered LEDs on MCPCB - total ± 4 w

400 lm (4000K)




225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com




4029-UAC
4029-UFC

4529-UAC
4529-UFC



4029-UAC






4029-UFC



4529-UAC



4529-UFC

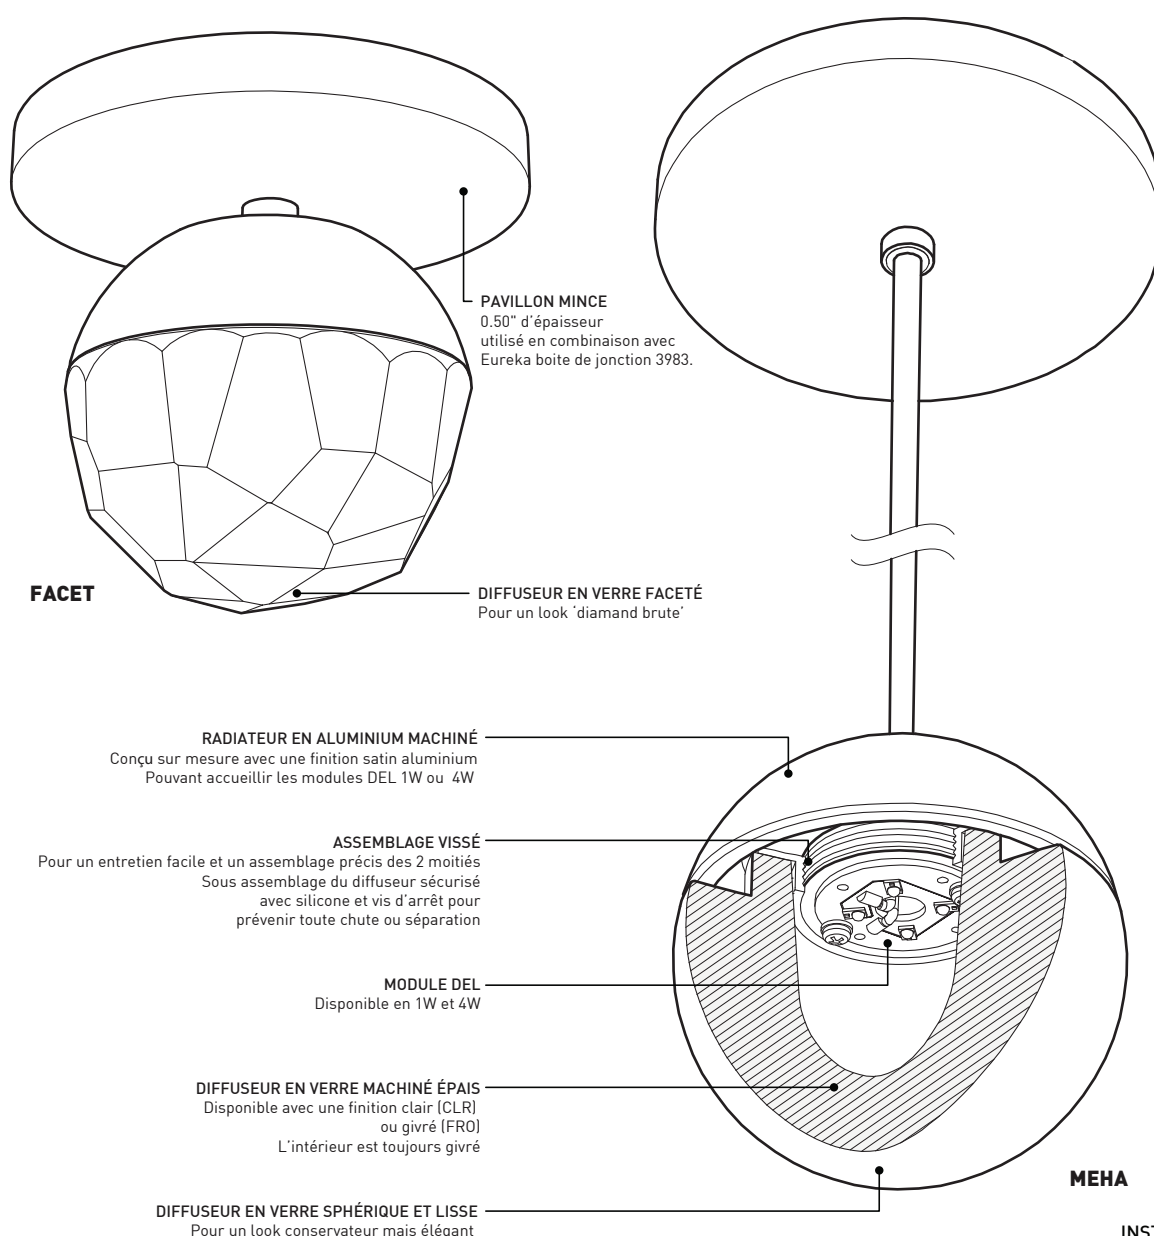

MEHA

INSTALLATION

Également disponible sur système de rails

SPÉCIFICATIONS

SOURCE LUMINEUSE

MODULE

LUMENS RÉELS

IRC

DISTRIBUTION LUMINEUSE

RADIATEUR

DIFFUSEUR

VOLTAGE

DRIVER

GRADATION

LM-79

WARRANTY

CERTIFICATION

DEL 1W

1 DEL 1W haute puissance sur MCPCB - total ± 1 w

Reconnue par UL - Fabriqué aux États-Unis

105 lm (4000K)

80 CRI (typique)

Direct

Aluminium machiné avec finition satin aluminium

Verre machiné épais disponible en clair (CLR) et en givré (FRO) ainsi qu'en lisse (UAC) ou faceté (UFC)

120V (DP) ou 120-277V (DV ou sans intensité variable)

Pilote constant courant 350 mA, reconnu UL

Gradation de type 'Phase Dimming' (DP) et de type '0-10V Dimming' (DV)

Sur demande

5 ans (sur les composantes électroniques)

Reconnu pas CSA

DEL 4W

4 DEL 1W haute puissance sur MCPCB - total ± 4 w

400 lm (4000K)



225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



4029-UAC
4029-UFC

4529-UAC
4529-UFC