PH Septima

1x22W E26 / Clear and matte glass/brass / White textile / - / - / - / 5741934508

The seven-shade glass crown emits a glare-free, downwardly directed light while radiating a pleasantly delicate glow. Frosted glass fields alternately cover the clear ones from shade-to-shade, thus diffusing the light even more softly.





Poul Henningsen

Poul Henningsen was born in Copenhagen by the famous Danish writer Agnes Henningsen. He never graduated as an architect, but studied at The Technical School at Frederiksberg, Denmark from 1911-14, and then at Technical College in Copenhagen from 1914-17.





Product info

Information

Electrical: System Wattage: 22W LED Wattage: 20 W Delivered lumens: 2,452 Efficacy: 111 lm/W Certifications: cULus, Dry Location Protection class IP20 Controllability: Phase dimming Actual performance dependent upon screw-base lamp used.

Mounting

1x stainless steel aircraft cable. Canopy: Untreated brass. Cord type: 3-conductor, 18 AWG white braided fabric covered power cord. Cord length: 12'.

Finish

Clear glass with sandblasted fields. Untreated satin-polished brass.

Materials

Shades: Clear glass with sandblasted fields. Legs: Steel, metallized brass. Socket housing and canopy: Untreated satin-polished brass. Please note that the brass surface is untreated. The untreated brass will change over time and develop a patina.

Sizes and weight

Width x Height x Length (in.) | 19.7 x 15.9 x 19.7 Max 13.0 lbs

Compliance

cULus, Dry location.

Light source

1x22W E26


Information

Electrical:
System Wattage: 22W
LED Wattage: 20 W
Delivered lumens: 2,452
Efficacy: 111 lm/W
Certifications:
cULus, Dry Location
Protection class IP20
Controllability: Phase dimming
Actual performance dependent upon screw-base lamp used.




Light distribution diagrams


Cartesian

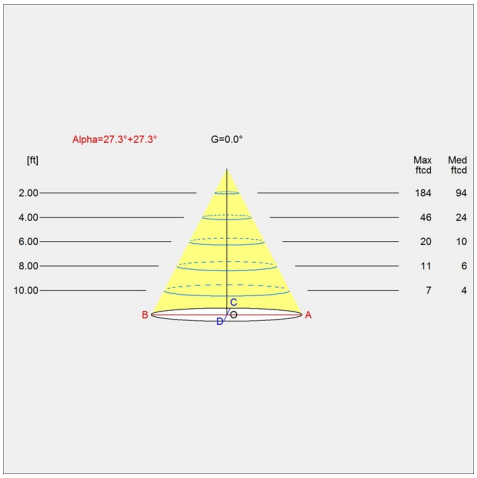

Isolux

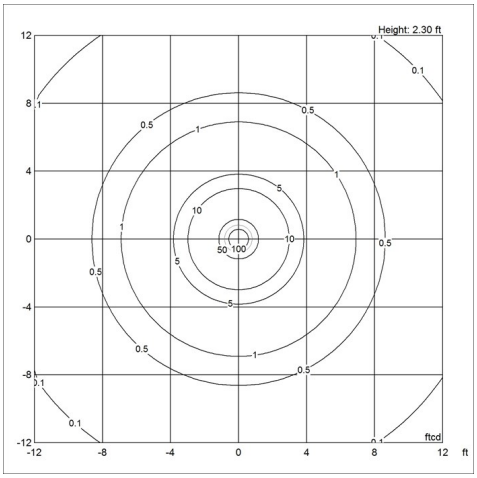

Polar

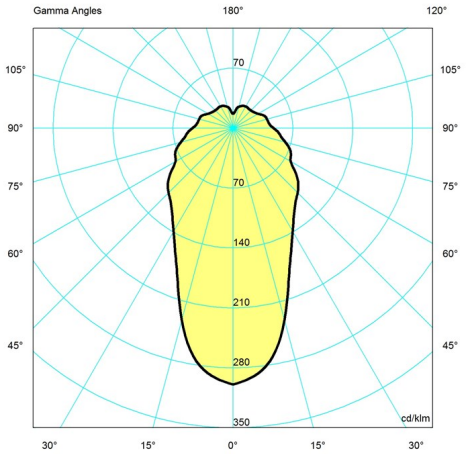

Data specifications

Colour	**Clear and matte glass/brass**
Width	**19.7**
Built-in Height	-
Class	-
Standby (W)	-
Inrush Current	-
Kelvin	-
SDCM	-
Watt	-
Light control	-

Length	**19.7**
Height	**15.9**
IP class	**20**
Net Weight	**13.0**
Power Factor (P = 100 % / P = 50 %)	-
Light source	**1x22W E26**
CRI	-
Lumen	-
Efficacy	-
Min. Dim Level (%)	-

UGR Transversal / Axial	**15.8/15.8**
Driver life	**-**

L80B50 (hours)	**-**