

SNOWLAB 2 DSNL4000-BFH

PROJECT PROJÉT

SPEC TYPE

NOTES



OVERALL HEIGHT HAUTEUR HORS TOUT



LIGHT SOURCE	HAL TRACK 1 CIRCUIT	LED TRACK 1 CIRCUIT	HAL-LED	LED DIM
MOUNTING	2734	2734E	2401E	2403G
CABLE	70.20"	70.50"	69.20"	69.95"

MOUNTING OPTIONS OPTIONS DE MONTAGE

2734 3.85" x 2.03" 98 x 52mm	2734E 6.15" x 2.00" 156 x 51mm	2401E Ø4.50" x 1.00" Ø114 x 25mm	2403G Ø4.50" x 1.75" Ø114 x 44mm

* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS

STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

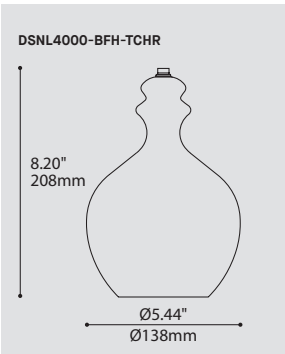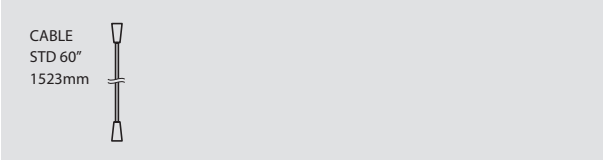

OPTIONS



CLEAR / CLAIR

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE	DSNL4000-BFH SNOWLAB 2	DSNL4000-BFH
LIGHT SOURCE SOURCE LUMINEUSE	(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO) MR16C.50 50W, HAL, MR16C, GU5.3 BASE LED.4* 4W, LED *NOT AVAILABLE WITH CLEAR GLASS	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR	FOR LED ONLY 30 3000K 35 3500K 40 4000K	
VOLTAGE VOLTAGE	120V 120 VOLT 277V* 277 VOLT *NOT AVAILABLE WITH A TRACK ADAPTOR	
DIMMING OPTION OPTION DE GRADATION	FOR LED ONLY DV* 0-10V DIMMING (120-277V) DP PHASE DIMMING (120V ONLY) *NOT AVAILABLE WITH A TRACK ADAPTOR	
CABLE CABLE	C CLEAR CABLE, FIELD ADJUSTABLE	C
CABLE LENGTH LONGUEUR DE CABLE	60 60" CABLE (STD LENGTH) ** CUSTOM CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING MONTAGE	RC ROUND CANOPY / PAVILLON ROND FOR HAL & LED: 1" CANOPY (2401E) FOR DIMMING LED: 1.50" CANOPY (2403G) TA1 TRACK ADAPTOR / ADAPTATEUR DE RAIL 1 CIRCUIT HAL 120/12V ADAPTOR (2734) LED DIMMING & NON-DIMMING 120V ADAPTOR (2734E)	
TRACK ADAPTOR FINISH FINI ADAPTATEUR DE RAIL ^(A)	WH WHITE BLK BLACK M G METALLIC GRAY (2734 ONLY) ^(A) FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY	
STRUCTURE FINISH FINI STRUCTURE	WH WHITE* *OTHER STRUCTURE FINISH THAN CANOPY IS ALWAYS CHROME	
DIFFUSER FINISH FINI DIFFUSEUR	TCHR TRANSLUCENT CHROME CLR CLEAR	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

- BIM
- DIM
- IES
- LED

DESIGN:	Designed by Snowlab, this modern interpretation of a traditional glass bell is a beautiful and subtle statement.
INSTALLATION:	Easy to install and adjust custom clear silicone power cable.
LIGHT SOURCE:	4W LED in 3000K (Warm white) or 4000K (Neutral white) and MR16 halogen.
STRUCTURE:	Die-cast steel structure with chrome plated finish.
DIFFUSER:	Available in translucent chrome or clear blown glass.
CERTIFIED:	c-CSA-us
CONCEPTION:	Interprétation moderne de Snowlab d'une cloche de verre traditionnelle apportant une belle touche de style subtile.
INSTALLATION:	Facile à installer et à ajuster sur câble d'alimentation en silicone clair.
SOURCE LUMINEUSE:	4W DEL disponible en 3000K (blanc chaud) ou 4000K (blanc neutre), halogène MR16.
STRUCTURE:	Acier embouti chromé.
DIFFUSEUR:	Verre soufflé chrome translucide ou clair.
CERTIFIÉ:	c-CSA-us