


Toldbod Pendant

TOL-120-P / 6.7 IN / 1x10W G16.5/candelabra / 120V / Black / Black textile / - / - / - / 10000149809

The pendant emits soft downwards directed light. The matte, white-painted inside of the elliptical shade helps to assure even distribution of the light.

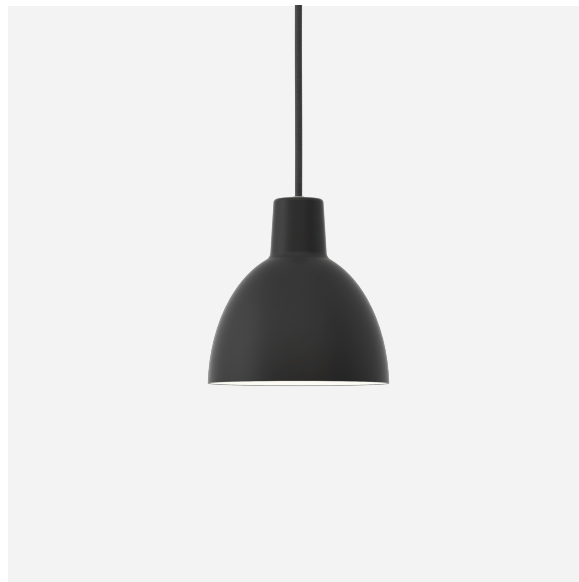

**Original Coffee,
Copenhagen**



Sparekassen Vendsyssel

Product info

Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

Information

Electrical: System Wattage: 4W or 22W LED Wattage: 4 W or 20 W Delivered lumens: 287 - 1,845 Efficacy: 71.8 lm/W - 83.9 lm/W Certifications: cULus, Dry Location Protection class IP20 Controllability: Phase dimming Actual performance dependent upon screw-base lamp used.

Mounting

Canopy: White. Cord type: 18 AWG fabric covered power cord. Black cord for black, dark rose, and blue-grey pendants, white cord for white and light grey pendants. Ø14.7"/Ø21.7" come with 1x stainless steel aircraft cable. Cord length: 12'.

Finish

Ø4.7"/Ø6.7"/Ø9.8": Black, White, Dark Rose, Light Grey or Blue-Grey. Matte powder coated. Ø14.7"/Ø21.7": Black or White. Matte powder coated.

Materials

Shade: Spun aluminum. Ø4.7" reflector: Spun white matte coated aluminum. Ø14.7"/Ø21.7" diffusor: Matte acrylic

Sizes and weight

Width x Height x Length (in.) | 6.7 x 6.8 x 6.7 Max 2.1 lbs | 9.8 x 10 x 9.8 Max 3.1 lbs | 15.7 x 16 x 15.7 Max 7.5 lbs | 21.7 x 22 x 21.7 Max 12.3 lbs | 4.7 x 4.8 x 4.7 Max 1.2 lbs

Compliance

cULus, Dry location.

Specification notes

a. 4.7 IN available only in 4W LED/T-4/G9. b. 6.7 IN available only in 10W LED/G16.5/candelabra. c. 9.8 IN available only in 10W LED/A-15/medium. d. 15.7 IN available only in 15W LED/A-19/medium. e. 21.7 IN available only in 22W LED/A-22/medium.

Light source

1x10W G16.5/candelabra

Information

Electrical:

System Wattage: 4W or 22W

LED Wattage: 4 W or 20 W

Delivered lumens: 287 - 1,845

Efficacy: 71.8 lm/W - 83.9 lm/W

Certifications:

cULus, Dry Location

Protection class IP20

Controllability: Phase dimming

Actual performance dependent upon screw-base lamp used.



Product family



Toldbod 6.1/8.7 Glass
Pendant



Toldbod 6.1 Wall




Toldbod 6.1 Bollard




Toldbod 11.4 Post

Light distribution diagrams


Cartesian

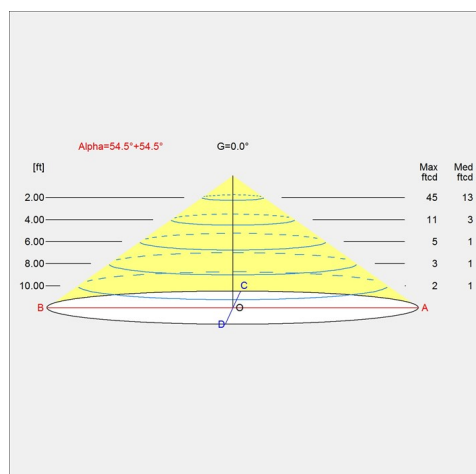

Isolux

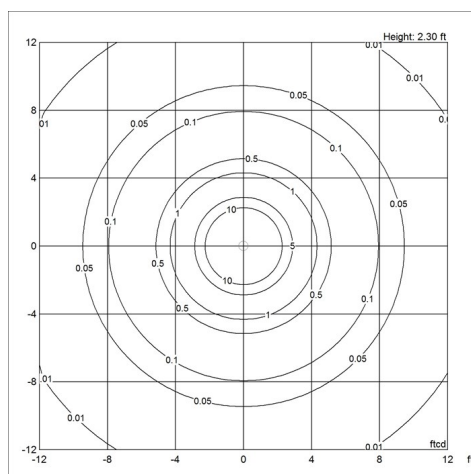

Polar

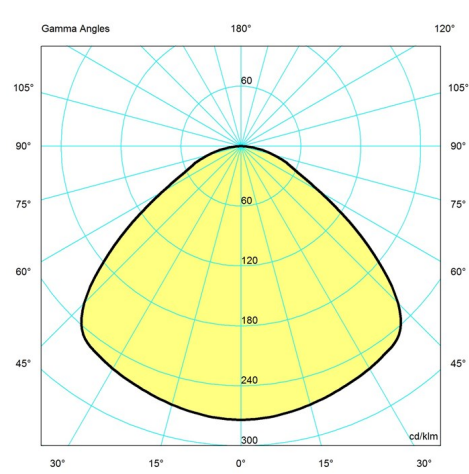

Data specifications

Colour	Black	Length	6.7
Width	6.7	Height	6.8
Built-in Height	-	IP class	20
Class	-	Net Weight	2.1
Standby (W)	-	Power Factor (P = 100 % / P = 50 %)	-
Inrush Current	-	Light source	1x10W G16.5/candelabra
Kelvin	-	CRI	-
SDCM	-	Lumen	-
Watt	-	Efficacy	-
Light control	-	Min. Dim Level (%)	-

Toldbod Pendant

UGR Transversal / Axial	21.4/21.4
-------------------------	-----------

Driver life	-
-------------	---

L80B50 (hours)	-
----------------	---
