







TECHNICAL DATA

VERSATILE

Fixture is available in many configurations, allowing it to be installed recessed in the ceiling, surface to it, or even suspended.

EFFICIENTLY DESIGNED


Custom designed heatsink to diffuse the heat produced by the two powerful lightsources in the most efficient way.

LAYERED SHADES

The two spun aluminium shades hides the light sources while encapsulating a soft layer of beautiful indirect light.

PRECISION

The COB offers a functional light precisely controlled by the polycarbonate TIR lens.

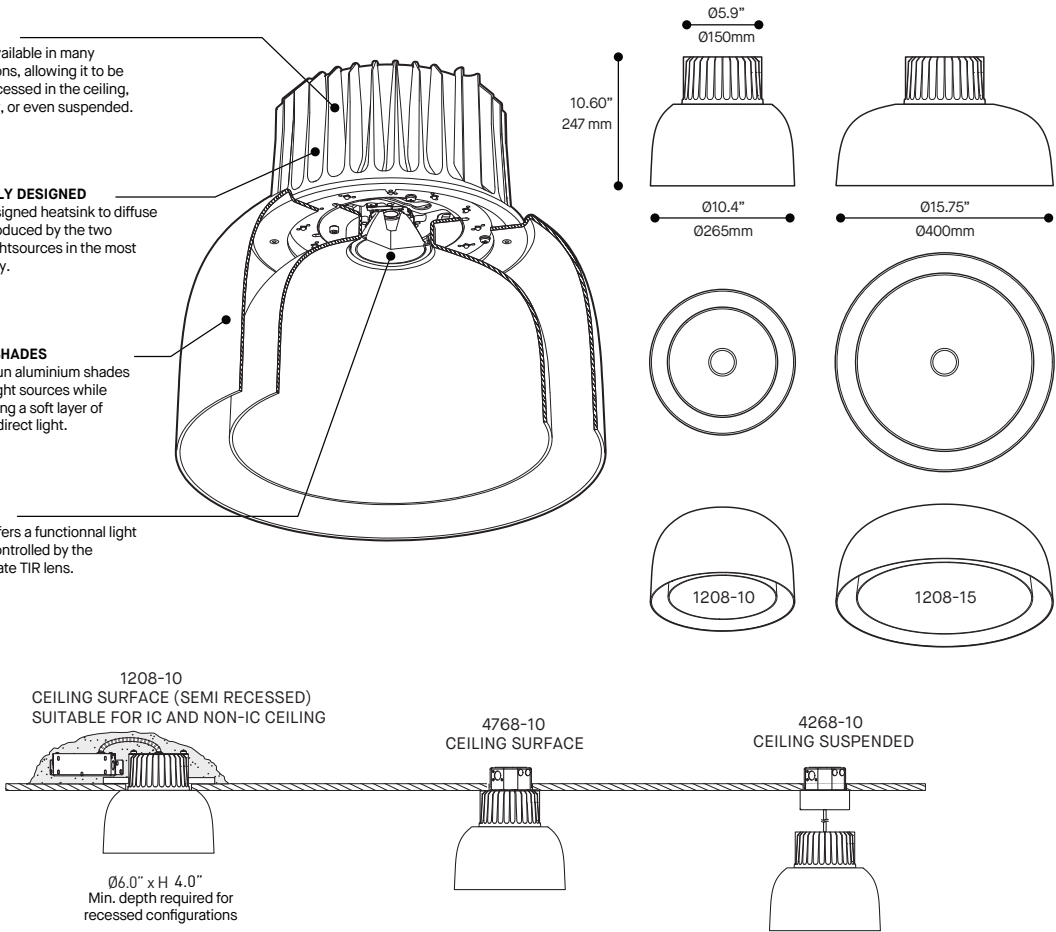


PRODUCT SPECIFICATION	1208/4268/4768-10		1208/4268/4768-15	
	COB	BOARD	COB	BOARD
PERFORMANCE				
SYSTEM WATTAGE	20 W		20 W	
DELIVERED LUMENS (4000K)	978 LM	212 LM	1046 LM	136 LM
EFFICACY	118 LM/W	18 LM/W	125 LM/W	12 LM/W
OTHER INFORMATION				
LUMINAIRE'S WEIGHT	8,27LBS / 3,76KG		9,75LBS / 4,43KG	
L70 (LUMEN MAINTENANCE)	> 55 000HRS	> 60 000 HRS	> 55 000 HRS	> 60 000 HRS
WELL & LEED STANDARD REQUIREMENTS				
MAX. LUMINANCE 45°-90° OF NADIR	748 CD/M²		527 CD/M²	
LIGHT QUALITY	R9 > 50 (90 CRI OPTION)			
FLICKERING TOLERANCE	LOW FLICKER, COMPLIANT TO CALIFORNIA TITLE 24			

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
80+	4000K	1.00
80+	3500K	0.99
80+	3000K	0.97
80+	2700K	0.94
90+	4000K	0.89
90+	3500K	0.86
90+	3000K	0.84
90+	2700K	0.80


LIGHT DISTRIBUTION





Twin is offered in two sizes, five finishes, and in semi-recessed, ceiling pendant or suspended configuration, so you can find the perfect fit for your space.



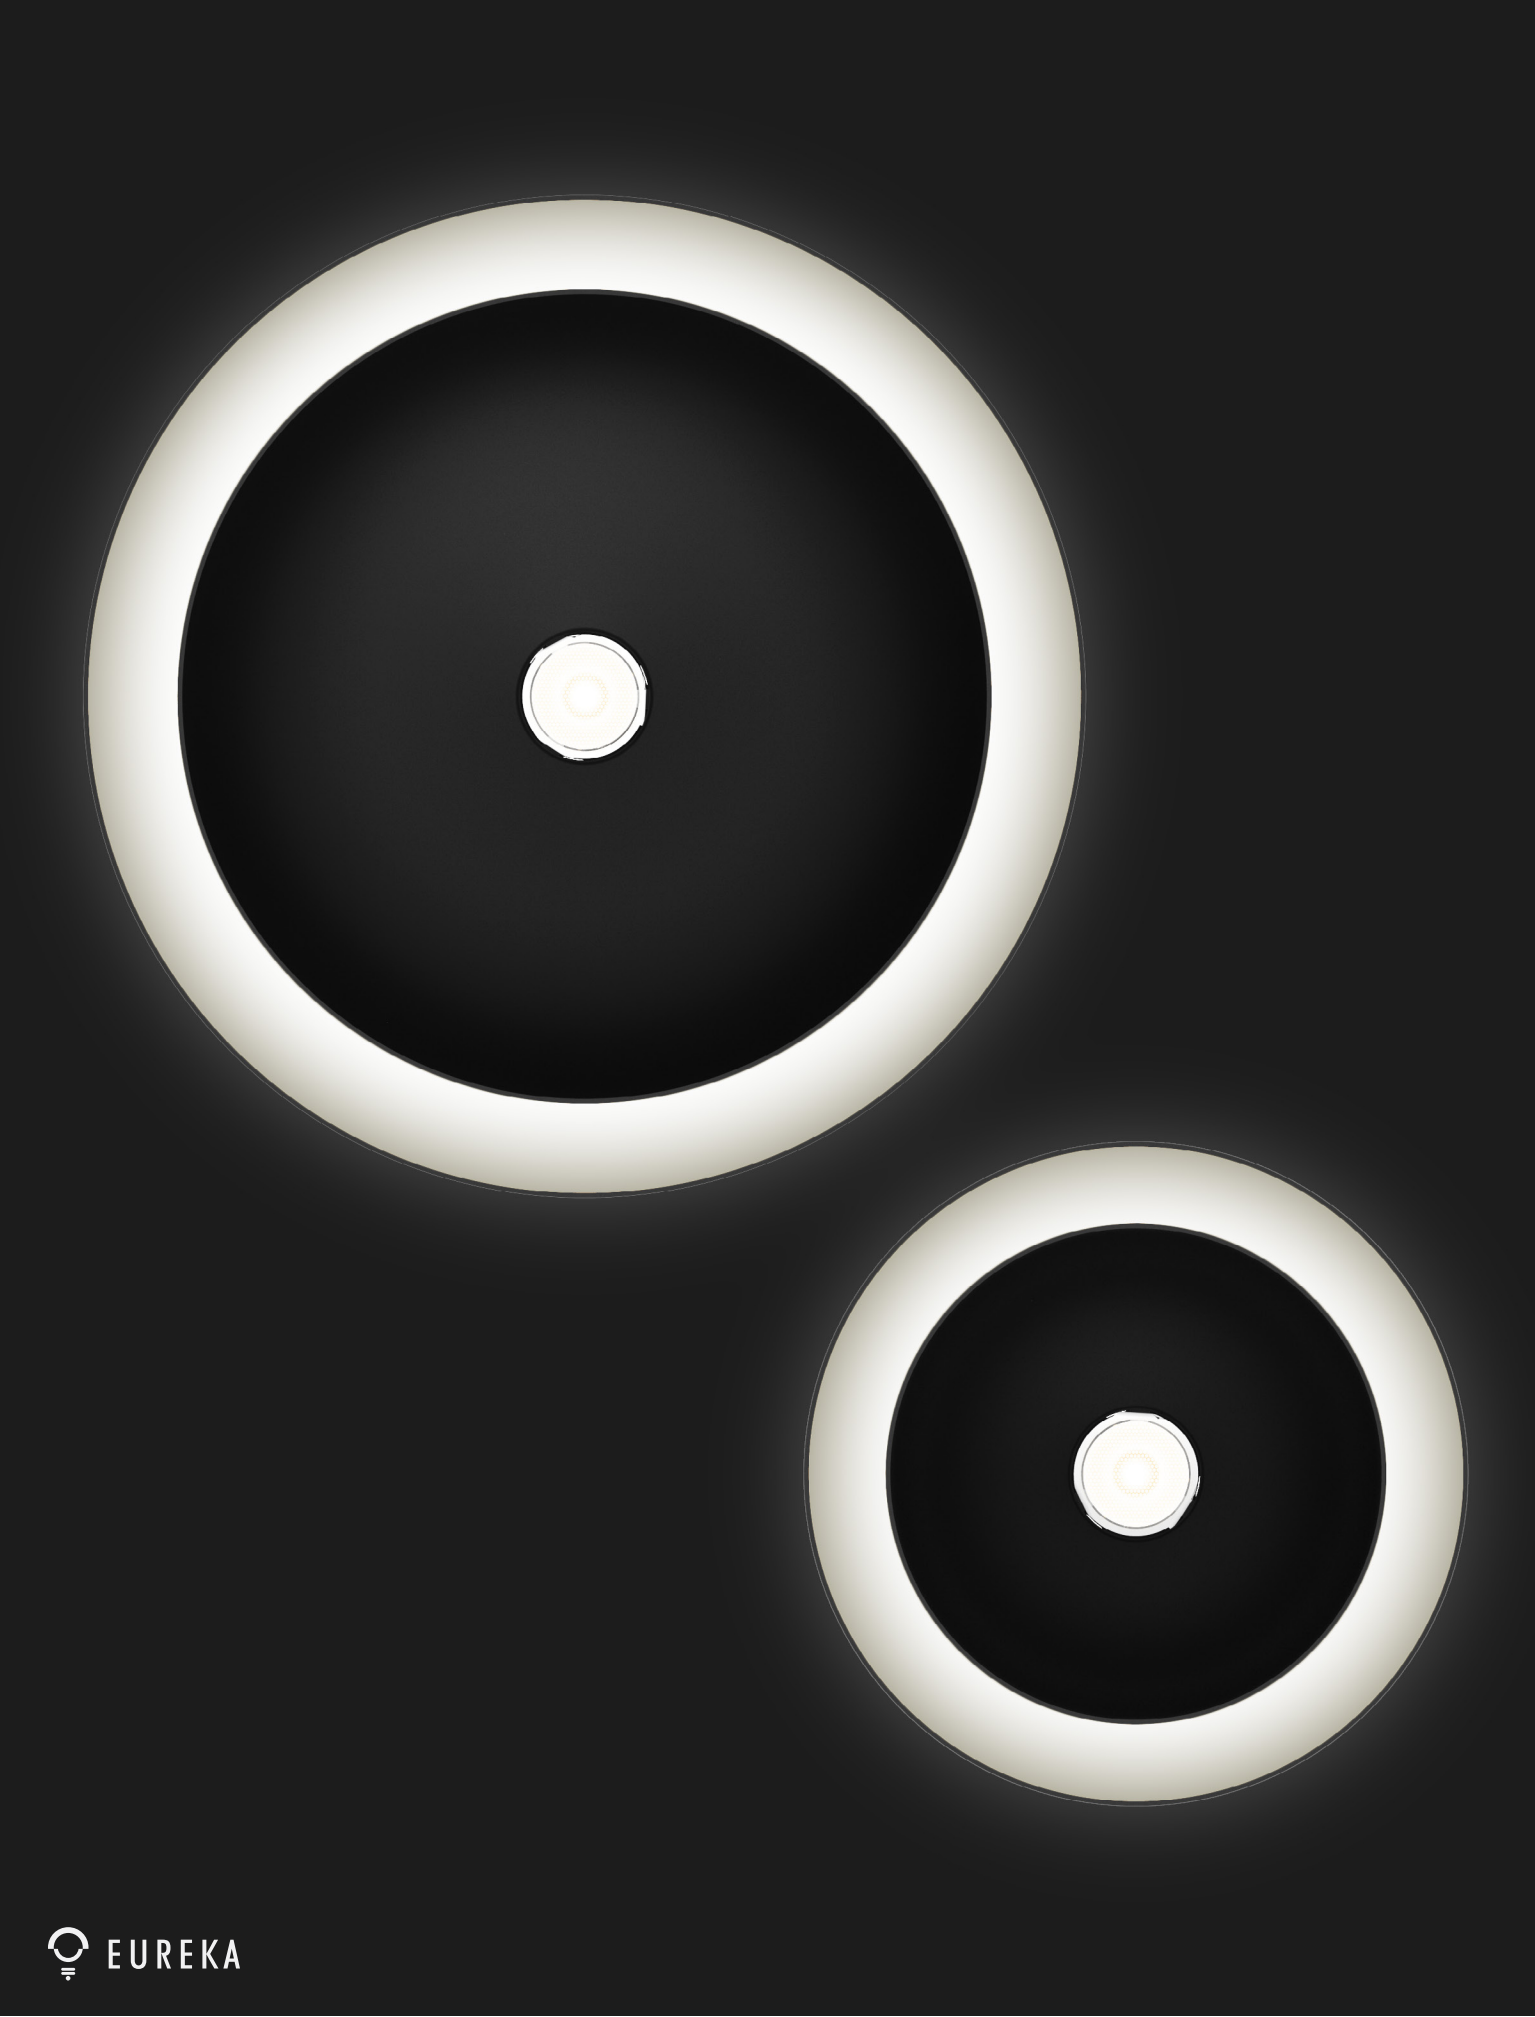


TWIN 1208

PROJECT	PROJET
SPEC TYPE	
NOTES	



FINISH FINI

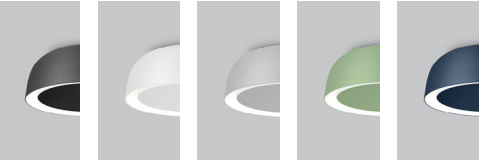

BLKE

WHE

LGE

PGE

NBE


FAMILY FAMILLE



4269-15

1200

4267

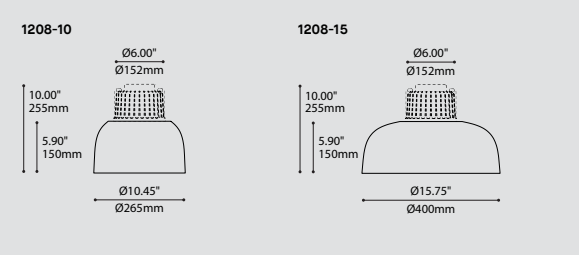

[QUICKSHIP](#) [CLICK HERE / CLIQUEZ ICI](#)

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL	MODÈLE	
1208-10	TWIN 10"	
1208-15	TWIN 15"	
1208-10-DD*	TWIN 10" (DUAL DIMMING)	
1208-15-DD*	TWIN 15" (DUAL DIMMING)	
* INNER AND OUTER LIGHT SOURCES ARE DIMMED INDEPENDANTLY		
LIGHT SOURCE	SOURCE LUMINEUSE	LED
LED	REGULAR OUTPUT	
COLOR TEMPERATURE	TEMPÉRATURE DE COULEUR	
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI)	INDICE DE RENDU DE COULEUR (IRC)	
80	80+ CRI	
90*	90+ CRI	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
VOLTAGE	VOLTAGE	
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION	OPTION DE GRADATION	
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.		
EMERGENCY BATTERY	BATTERIE D'URGENCE	
FOR 120-227V, EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.		
EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
* 3981EA ACCESSORY IS REQUIRED		
BEAM ANGLE	ANGLE DE FAISCEAU	40
40	40° LENS	
SHADE FINISH	FINI ABAT-JOUR ^(A)	
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
LGE	LIGHT GREY FINE TEXTURE	
PGE	PALE GREEN FINE TEXTURE	
NBE	NAVY BLUE FINE TEXTURE	
RAL*	PLEASE SPECIFY RAL CODE	
^(A) FINISH BETWEEN SHADES IS ALWAYS WHITE		
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
ACCESSORY	ACCESSOIRE	
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




DESIGN:	Twin is a light fixture with a simple and charming shape composed of a double layered shade sheltering a soft halo of indirect light. The core of these two shades hides a powerful projector providing a strong direct light. Twin is available in two sizes and in a variety of colorful finishes. Recessed mounting system allows for simple and secure installation in a variety of ceiling types from 0.375" (9.5mm) to 2.75" (70mm) thick, accommodating renovation projects.
INSTALLATION:	Powerful LED projector with a 20° or 40° projection angle, and a circular LED module that projects a soft and cozy indirect light, diffused between the shades. Offered with phase or 0-10V gradation options.
LIGHT SOURCE:	High-performance die-cast aluminum heatsink with textured black finish. Spun aluminum shades, offered in a wide variety of external finishes with a white internal finish for optimal light reflection.
CONSTRUCTION:	c-CSA-US
CERTIFIED:	

TWIN 1208

QUICKSHIP
PROJECT PROJÉT
SPEC TYPE
NOTES




FINISH FINI



BLKE

WHE

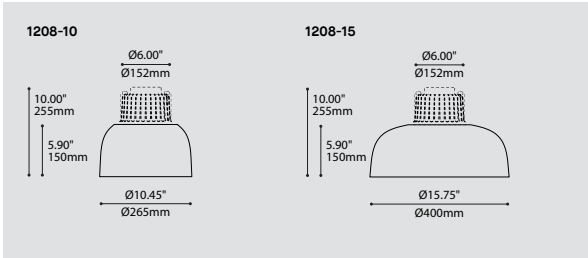

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
QUICKSHIP		
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS	QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS	QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS
MODEL	MODÈLE	
1208-10	TWIN 10"	
1208-15	TWIN 15"	
1208-10-DD*	TWIN 10" (DUAL DIMMING)	
1208-15-DD*	TWIN 15" (DUAL DIMMING)	
* INNER AND OUTER LIGHT SOURCES ARE DIMMED INDEPENDANTLY		
LIGHT SOURCE	SOURCE LUMINEUSE	LED
LED	REGULAR OUTPUT	
COLOR TEMPERATURE	TEMPÉRATURE DE COULEUR	
30	3000K	
35	3500K	
40	4000K	
COLOR RENDERING INDEX (CRI)	INDICE DE RENDU DE COULEUR (IRC)	80
80	80+ CRI	
VOLTAGE	VOLTAGE	
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION	OPTION DE GRADATION	
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.		
BEAM ANGLE	ANGLE DE FAISCEAU	40
40	40° LENS	
SHADE FINISH	FINI ABAT-JOUR ^(A)	
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
^(A) FINISH BETWEEN SHADES IS ALWAYS WHITE		

ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:	Twin is a light fixture with a simple and charming shape composed of a double layered shade sheltering a soft halo of indirect light. The core of these two shades hides a powerful projector providing a strong direct light. Twin is available in two sizes and in a variety of colorful finishes. Recessed mounting system allows for simple and secure installation in a variety of ceiling types from 0.375" (9.5mm) to 2.75" (70mm) thick, accommodating renovation projects.
INSTALLATION:	Powerful LED projector with a 20° or 40° projection angle, and a circular LED module that projects a soft and cozy indirect light, diffused between the shades. Offered with phase or 0-10V gradation options.
LIGHT SOURCE:	High-performance die-cast aluminum heatsink with textured black finish. Spun aluminum shades, offered in a wide variety of external finishes with a white internal finish for optimal light reflection.
CONSTRUCTION:	c-CSA-us
CERTIFIED:	

TWIN 4268

PROJECT PROJÉT
SPEC TYPE
NOTES



FINISH FINI



BLKE

WHE

LGE



PGE

NBE

FAMILY FAMILLE



MOUNTING OPTIONS OPTIONS DE MONTAGE

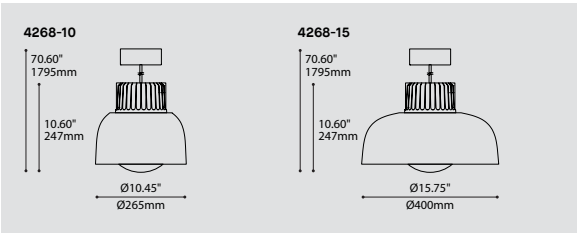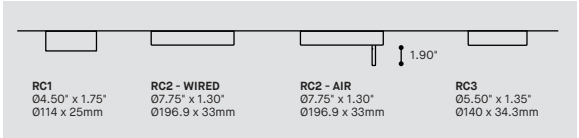

QUICKSHIP, CLICK HERE / CLIQUEZ ICI

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL	MODÈLE	
4268-10	TWIN 10"	
4268-15	TWIN 15"	
4268-10-DD*	TWIN 10" (DUAL DIMMING)	
4268-15-DD*	TWIN 15" (DUAL DIMMING)	
* INNER AND OUTER LIGHT SOURCES ARE DIMMED INDEPENDANTLY		
LIGHT SOURCE	SOURCE LUMINEUSE	LED
LED	REGULAR OUTPUT	
COLOR TEMPERATURE	TEMPÉRATURE DE COULEUR	
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI)	INDICE DE RENDU DE COULEUR (IRC)	
80	80+ CRI	
90*	90+ CRI	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
VOLTAGE	VOLTAGE	
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION	OPTION DE CONTRÔLE	
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
NLTAIR2*	NLIGHT AIR CONTROL GEN 2	
NLIGHT*	NLIGHT WIRED CONTROL	
* REQUIRES RC2 CANOPY		
* DUAL DIMMING NOT AVAILABLE WITH NLIGHT OPTIONS		
* EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS		
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.		
EMERGENCY BATTERY	BATTERIE D'URGENCE	
FOR 120-227V. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.		
EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
* 3981EA ACCESSORY IS REQUIRED		
BEAM ANGLE	ANGLE DE FAISCEAU	40
40	40° LENS	
CABLE	CABLE	C
C	BLACK CABLE, FIELD ADJUSTABLE	
CABLE LENGTH	LONGUEUR DE CABLE	
60	60" CABLE (STD LENGTH)	
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
MOUNTING	MONTAGE	
ROUND CANOPY / PAVILLON ROND		
RC1	SCREWLESS 1.75" CANOPY (2471H)	
RC2	NLIGHT SCREWLESS CANOPY 07.75" X 1.30" (2474H)	
RC3	SCREWLESS CANOPY 05.50" X 1.35" (2473F)	
CANOPY FINISH	FINI PAVILLON	
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
SHADE FINISH	FINI ABAT-JOUR ^{(A) (B)}	
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
LGE	LIGHT GREY FINE TEXTURE	
PGE	PALE GREEN FINE TEXTURE	
NBE	NAVY BLUE FINE TEXTURE	
RAL*	PLEASE SPECIFY RAL CODE	
^(A) FINISH BETWEEN SHADES IS ALWAYS WHITE		
^(B) HEATSINK IS ALWAYS BLACK		
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
ACCESSORY	ACCESSOIRE	
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




TWIN 4268

QUICKSHIP
PROJECT PROJET
SPEC TYPE
NOTES




FINISH FINI



BLKE WHE

MOUNTING OPTIONS OPTIONS DE MONTAGE

RC1 Ø4.50" x 1.75" Ø114 x 25mm	RC2 Ø5.50" x 1.35" Ø140 x 34.3mm
--------------------------------------	--

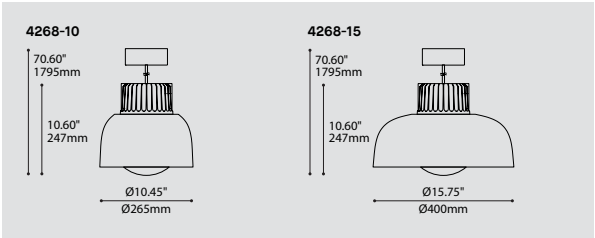

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
QUICKSHIP		
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS	
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS	
MODEL	MODÈLE	
4268-10	TWIN 10"	
4268-15	TWIN 15"	
4268-10-DD*	TWIN 10" (DUAL DIMMING)	
4268-15-DD*	TWIN 15" (DUAL DIMMING)	
	* INNER AND OUTER LIGHT SOURCES ARE DIMMED INDEPENDANTLY	
LIGHT SOURCE	SOURCE LUMINEUSE	LED
LED	REGULAR OUTPUT	
COLOR TEMPERATURE	TEMPÉRATURE DE COULEUR	
30	3000K	
35	3500K	
40	4000K	
COLOR RENDERING INDEX (CRI)	INDICE DE RENDU DE COULEUR (IRC)	80
80	80+ CRI	
VOLTAGE	VOLTAGE	
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION	OPTION DE GRADATION	
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.	
BEAM ANGLE	ANGLE DE FAISCEAU	40
40	40° LENS	
CABLE	CABLE	C
C	BLACK CABLE, FIELD ADJUSTABLE	
CABLE LENGTH	LONGUEUR DE CABLE	
60	60" CABLE (STD LENGTH)	
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.	
MOUNTING	MONTAGE	
RC1	ROUND CANOPY / PAVILLON ROND	
RC2	SCREWLESS 1.75" CANOPY (2471H)	
	SCREWLESS CANOPY Ø5.50" X 1.35" (2473F)	
CANOPY FINISH	FINI PAVILLON	
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
SHADE FINISH	FINI ABAT-JOUR ^(A) ^(B)	
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
	^(A) FINISH BETWEEN SHADES IS ALWAYS WHITE	
	^(B) HEATSINK IS ALWAYS BLACK	

ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

- BIM
- DIM
- EMB
- IES
- LED

TWIN 4768

PROJECT PROJET
SPEC TYPE
NOTES




FINISH FINI



BLKE WHE LGE PGE NBE

FAMILY FAMILLE

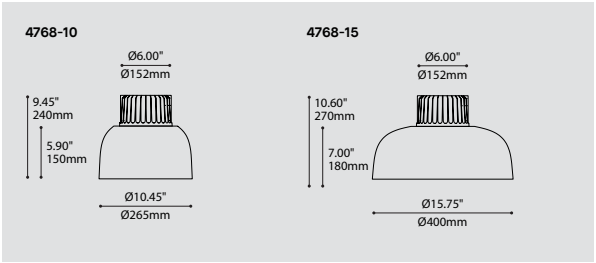

QUICKSHIP, CLICK HERE / CLIQUEZ ICI

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL	MODÈLE	
4768-10	TWIN 10"	
4768-15	TWIN 15"	
4768-10-DD*	TWIN 10" (DUAL DIMMING)	
4768-15-DD*	TWIN 15" (DUAL DIMMING)	
	* INNER AND OUTER LIGHT SOURCES ARE DIMMED INDEPENDANTLY	
LIGHT SOURCE	SOURCE LUMINEUSE	LED
LED	REGULAR OUTPUT	
COLOR TEMPERATURE	TEMPÉRATURE DE COULEUR	
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI)	INDICE DE RENDU DE COULEUR (IRC)	
80	80+ CRI	
90*	90+ CRI	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
VOLTAGE	VOLTAGE	
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION	OPTION DE CONTRÔLE	
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
NLTAIR2*	NLIGHT AIR CONTROL GEN 2	
NLIGHT*	NLIGHT WIRED CONTROL	
	* NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAB FOR NLTAIR2 OR 39NLWB FOR NLIGHT)	
	* DUAL DIMMING NOT AVAILABLE WITH NLIGHT OPTIONS	
	* EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS	
	REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	
EMERGENCY BATTERY	BATTERIE D'URGENCE	
	FOR 120-227V, EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.	
EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
	* 39B1EA ACCESSORY IS REQUIRED	
BEAM ANGLE	ANGLE DE FAISCEAU	40
40	40° LENS	
HEATSINK FINISH	FINI RADIATEUR	BLKE
BLKE	BLACK FINE TEXTURE	
SHADE FINISH	FINI ABAT-JOUR ^(A)	
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
LGE	LIGHT GREY FINE TEXTURE	
PGE	PALE GREEN FINE TEXTURE	
NBE	NAVY BLUE FINE TEXTURE	
RAL*	PLEASE SPECIFY RAL CODE	
	^(A) FINISH BETWEEN SHADES IS ALWAYS WHITE	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
ACCESSORY	ACCESSOIRE	3983
	ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING	
3983	DEEP JUNCTION BOX	
39NLAB*	NLIGHT AIR GEN 2 REMOTE CONTROL BOX	
39NLWB*	NLIGHT WIRED REMOTE CONTROL BOX	
	* FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.	
EMERGENCY BATTERY ACCESSORY	ACCESSOIRE BATTERIE D'URGENCE	
39B1EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

- BIM
- DIM
- EMB
- IES
- LED
-
-

DESIGN:	Twin is a light fixture with a simple and charming shape composed of a double layered shade sheltering a soft halo of indirect light. The core of these two shades hides a powerful projector providing a strong direct light. Twin is available in two sizes and in a variety of colorful finishes.
INSTALLATION:	Ceiling installation on deep junction box (supplied with light fixture).
LIGHT SOURCE:	Powerful LED projector with a 20° or 40° projection angle, and a circular LED module that projects a soft and cozy indirect light, diffused between the shades. Offered with phase or 0-10V gradation options.
CONSTRUCTION:	High-performance die-cast aluminum heatsink with textured black finish. Spun aluminum shades, offered in a wide variety of external finishes with a white internal finish for optimal light reflection.
CERTIFIED:	c-CSA-us, c-UL-us



TWIN 4768

QUICKSHIP

PROJECTPROJET

SPEC TYPE

NOTES

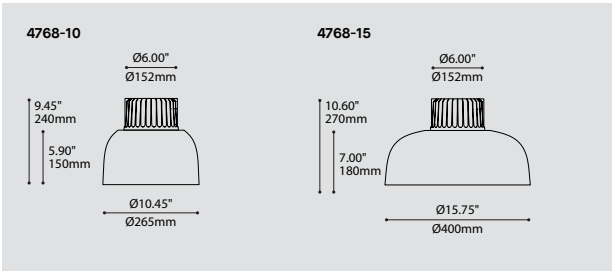

ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE	CODE
QUICKSHIP			
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS		
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS		
	QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS		
	QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS		
MODEL		MODÈLE	
4768-10	TWIN 10"		
4768-15	TWIN 15"		
4768-10-DD*	TWIN 10" (DUAL DIMMING)		
4768-15-DD*	TWIN 15" (DUAL DIMMING)		
	* INNER AND OUTER LIGHT SOURCES ARE DIMMED INDEPENDANTLY		
LIGHT SOURCE		SOURCE LUMINEUSE	LED
LED	REGULAR OUTPUT		
COLOR TEMPERATURE		TEMPÉRATURE DE COULEUR	
30	3000K		
35	3500K		
40	4000K		
COLOR RENDERING INDEX (CRI)		INDICE DE RENDU DE COULEUR (IRC)	80
80	80+ CRI		
VOLTAGE		VOLTAGE	
120V	120 VOLT		
277V	277 VOLT		
DIMMING OPTION		OPTION DE GRADATION	
DV	0-10V DIMMING (120V-277V)		
DP	PHASE DIMMING (120V ONLY)		
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.		
BEAM ANGLE		ANGLE DE FAISCEAU	40
40	40° LENS		
HEATSINK FINISH		FINI RADIATEUR	BLKE
BLKE	BLACK FINE TEXTURE		
SHADE FINISH		FINI ABAT-JOUR ^(A)	
BLKE	BLACK FINE TEXTURE		
WHE	WHITE FINE TEXTURE		
	^(A) FINISH BETWEEN SHADES IS ALWAYS WHITE		
ACCESSORY		ACCESSOIRE	3983
3983	DEEP JUNCTION BOX		
ADDITIONAL OPTIONS AVAILABLE ON STANDARD SHIPPING / OPTIONS ADDITIONNELLES DISPONIBLES EN LIVRAISON STANDARD			

PRODUCT CHARACTERISTICS

- BIM
- DIM
- EMB
- IES
- LED

DESIGN :	Twin is a light fixture with a simple and charming shape composed of a double layered shade sheltering a soft halo of indirect light. The core of these two shades hides a powerful projector providing a strong direct light. Twin is available in two sizes and in a variety of colorful finishes.
INSTALLATION:	Ceiling installation on deep junction box (supplied with light fixture).
LIGHT SOURCE:	Powerful LED projector with a 20° or 40° projection angle, and a circular LED module that projects a soft and cozy indirect light, diffused between the shades. Offered with phase or 0-10V gradation options.
CONSTRUCTION :	High-performance die-cast aluminum heatsink with textured black finish. Spun aluminum shades, offered in a wide variety of external finishes with a white internal finish for optimal light reflection.
CERTIFIED:	c-CSA-us, c-UL-us

Photometric Report

1208-10 - 4268-10 - 4768-10

CCT (K):	4000
Delivered Lumens (lm):	939
System wattage (W)*:	19.5
Distribution:	Direct
Delivered Efficacy (lm/W):	48.15
Photometric type	C



Luminous dimensions

Luminous shape:	Circle
Units:	in (mm)
0-180 Axis:	11.811 (300.00)
90-270 Axis:	11.811 (300.00)
Height:	7.874 (200.00)

Luminaire spacing criteria

2 luminaires, plane 0:	0.67
2 luminaires, plane 90:	0.67
4 luminaires:	0.71

*System wattage include driver and LED module consumption

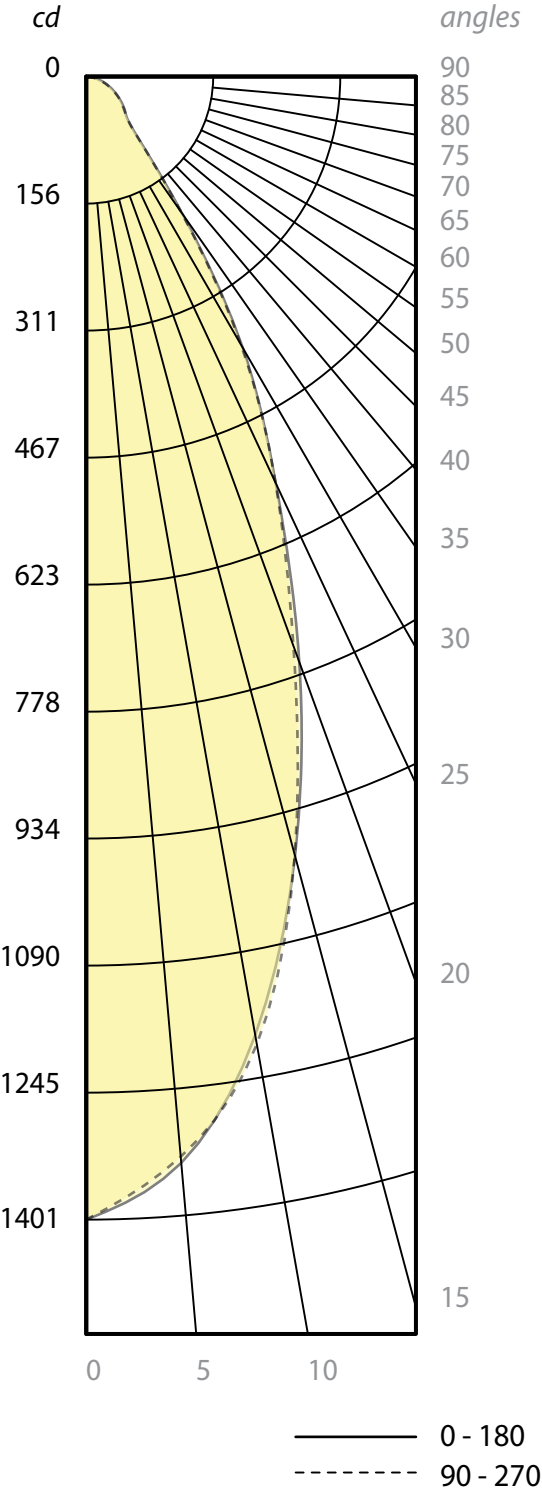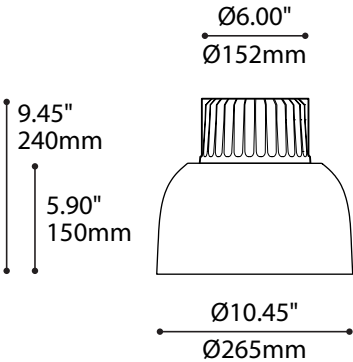

Photometric Report

1208-15 - 4268-15 - 4768-15

CCT (K): 4000
Delivered Lumens (lm): 872
System wattage (W)*: 19.5
Distribution: Direct
Delivered Efficacy (lm/W): 44.72
Photometric type: C



Luminous dimensions

Luminous shape: Circle
Units: in (mm)
0-180 Axis: 15.748 (400.00)
90-270 Axis: 15.748 (400.00)
Height: 7.874 (200.00)

Luminaire spacing criteria

2 luminaires, plane 0: 0.67
2 luminaires, plane 90: 0.66
4 luminaires: 0.69

*System wattage include driver and LED module consumption

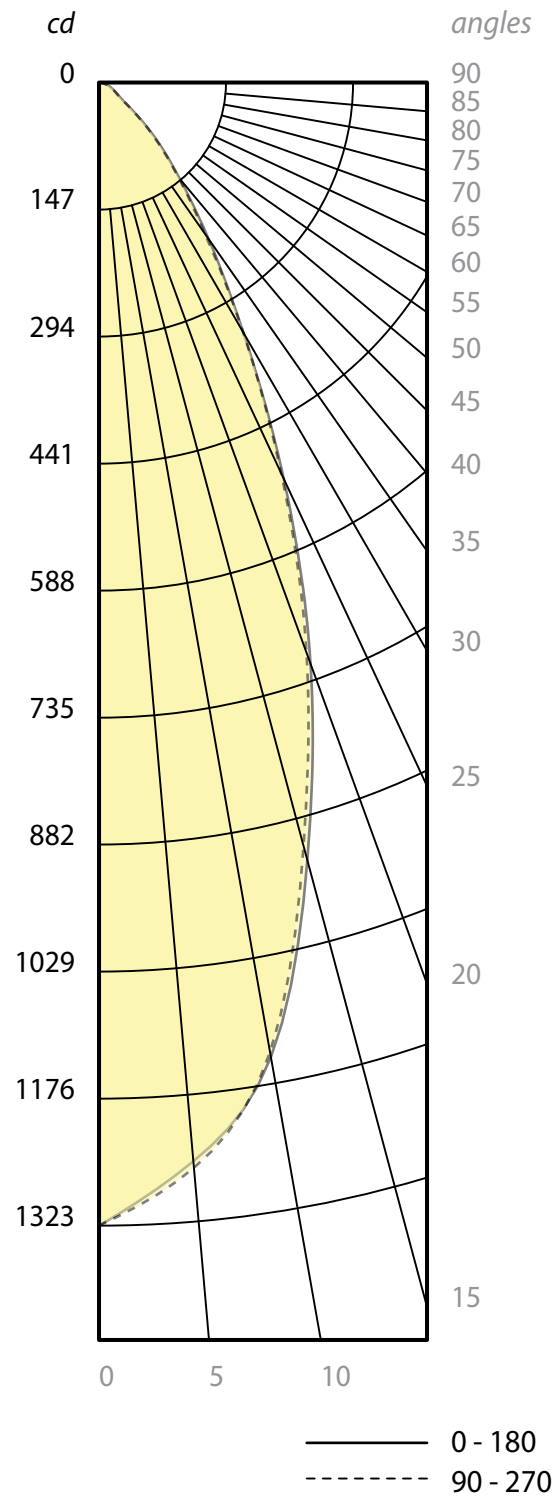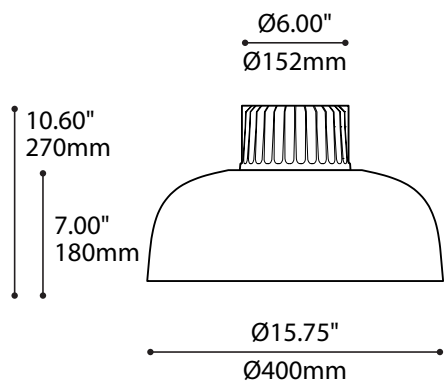

— 0 - 180
- - - 90 - 270

