


Vapor[®] Solid

Ceiling & Wall Panels

Our Key Features



Bring forth stunning textural vision with the endless possibilities of Vapor® Solid. These 2'x4' Torsion spring ceiling, and Vertika® Wall panels flow continuously throughout, transitioning from wall to ceiling, allowing you to cover any space thanks to easy installation and accessibility. These solid panels come in a wide array of powder-coated finishes with multiple color and metallic options to mix and match with other Vapor® patterns, or create a Mondrian style installation with color blocking. Optional inline lighting accessories are available to further customize your projects intent.






Easy Installation & Access

Vapor[®] panels offer easy install, using quick torsion spring attachment across standard ceiling grid systems or simple wall attachment using our Vertika[®] channel system.

Superior Flatness & Strength


Vapor[®] panels are manufactured from aluminum that is on average 50% thicker than the competition, which in combination with our precision processes result in unrivaled flatness.

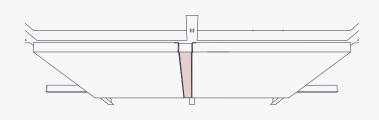

Integrated InLine Option

Arktura's Solid Panels makes it easy to seamlessly add illumination through linear integrated InLine lighting.

Inspiration

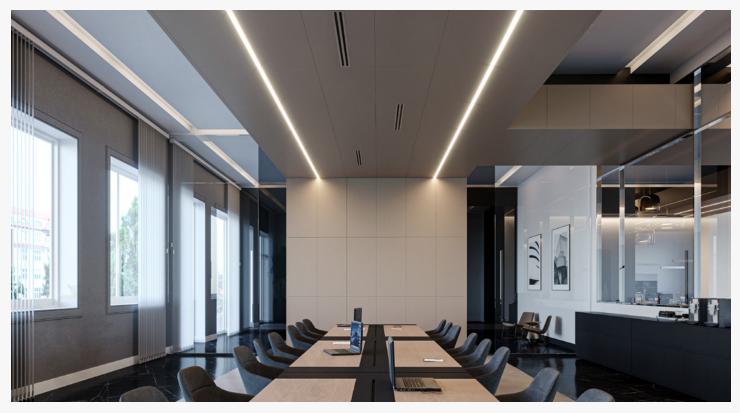

Seamless and Dynamic Wall to Ceiling Transitions



Easy Install with Access to Vital Building Infrastructure

Seamlessly Scalable to Fit Any Size Project


Overview

- 1 Understanding the System
- 2 Optional Accessories



Standard Panel

Vapor[®] is a modular accessible aluminum panel system designed to work with torsion grid. Customization is available.

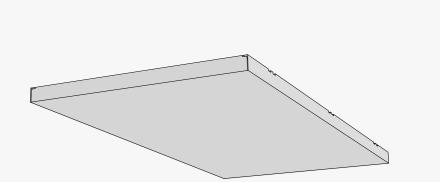


Available Finishes

Product Specifications

Seamlessly Join Walls & Ceilings

Vapor[®] easily transitions from one plane to another and around corners.

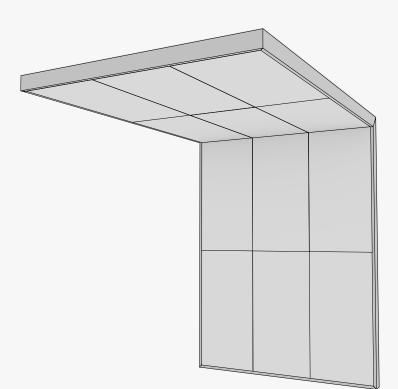




Understanding the Panel

The pattern surface is created by seamlessly tiling across your space.


Panel A: 0% Open

* Vertika® Trim



Panel Configuration, Wall or Ceiling

Ceiling Section

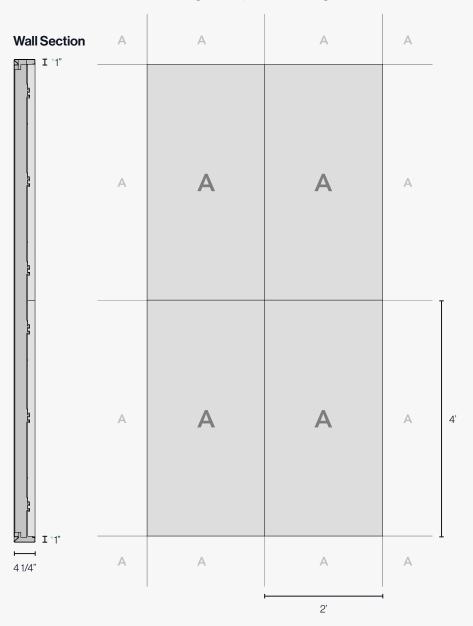


() All dimensions nominal.


1 Understanding the System

Accessory Options - Ceiling

InLine downlight

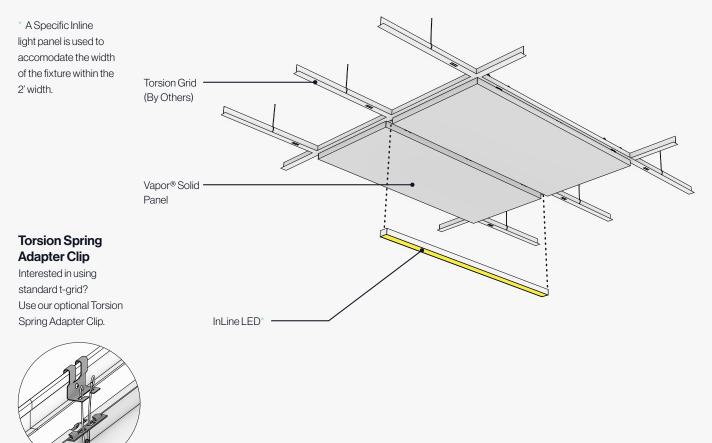

Attachment System - Ceiling

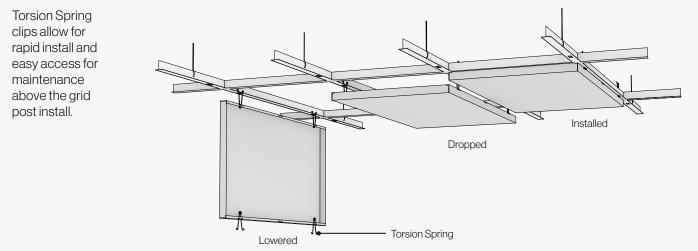




Accessory Options - Wall


InLine light

* A Specific Inline light panel is used to accomodate the width of the fixture within the 2' width.

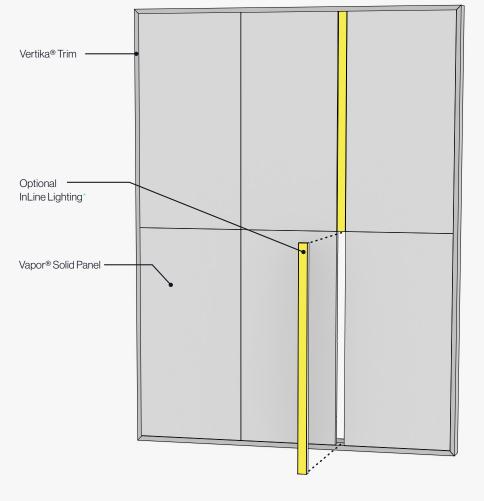

Attachment System - Wall


Panels are easily installed or removed by sliding onto or lifting off from the system's Vertika® channel hooks.



Available Finishes

Aluminum Panel

Powder Coat Standard Finish

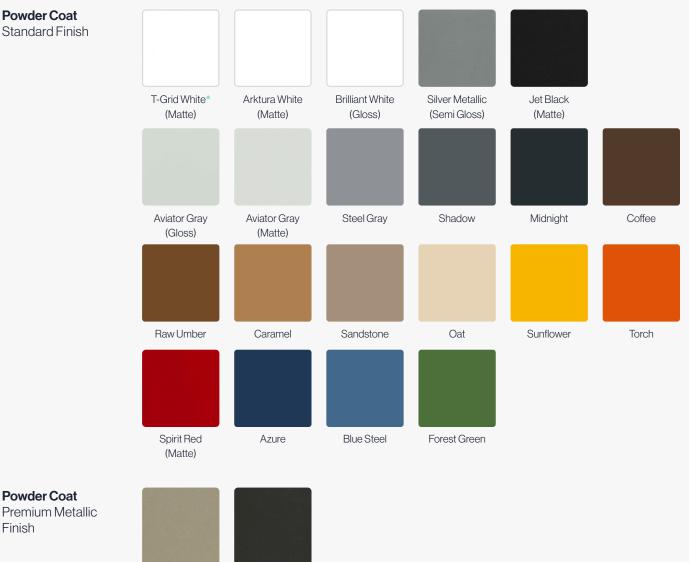

Chilled Champagne Burnished Bronze (Semi Gloss) (Semi Gloss)

Custom Powder Colors

Powder Coat

Finish

We offer premium non-stock RAL and custom color match options as well. Contact your sales rep for more information.



Metallic

* This color was designed to pair with Armstrong color "WH" grid and trim.

RAL

(1) All premium and standard finishes shown are designed for interior specifications. Products may be specified for exterior use, and with alt treatments required by local code or facility, including custom color match or specialty finishes. Any changes to specification from interior standard or interior premium will result in a custom powder coat fee.

4 Product Specifications & Certifications

System Specs


Panel Size (WxHxD)	2' x 4' x 11/2"	
Material	Aluminum	
Openness in Plan	0%	
Fire Rating	ASTM E84 - Class A	
Ceiling Attachment	Torsion Grid (By Others)	
Wall Attachment	Vertika® Wall (Refer to Vertika® Brochure)	
Accessibility	Torsion Spring Hinge	
Trimmability	Yes, per installation manual	
Optional Accessories	InLine Light	


Lighting Specs

Arktura InLine Lighting

Makes it easy to seamlessly integrate linear lighting into the design of your paneling.

Ceiling







Side - Length Options

48" 48" 96"

Specs			
Product Features	Arktura InLine Eco	Arktura InLine	
Total Lumens	640 Lm/Ft	1280 Lm/Ft	
Delivered Lumens	480 Lm/Ft	960 Lm/Ft	
Power Consumption	6W/Ft	12W/Ft	
CRI	95+		
Color Temperatures	3000K, 3500K, 4000K		
Size (LxWxD)	48" x 2" x 1.25", 96" x 2" x 1.25"		
UL Rating	Recognized		
Voltage	24 Volts		
Dimming Options	MLV, 1-10V, 0-10V		
Plenum Rated Wire	Standard		


Elevations

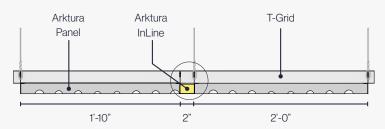

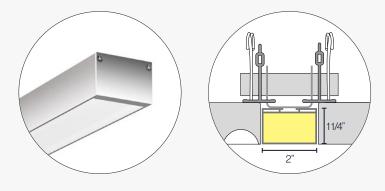

Photometric


Located At Horizontal Angle = 0, Vertical Angle = 0 **#1** - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.) **#2** - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)

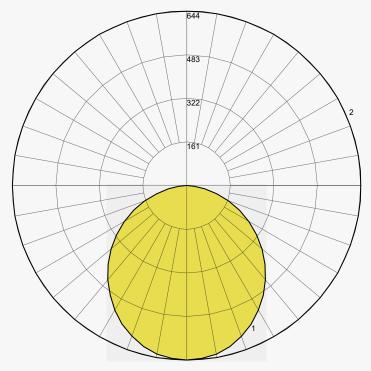

Product Line

Design Options


Vapor[®] offers a growing library of metal panels in preconfigured seamlessly tileable patterns that can also be mixed and matched as desired. For additional acoustic performance, take a look at our Soft Sound[®] faced VaporSoft[®].

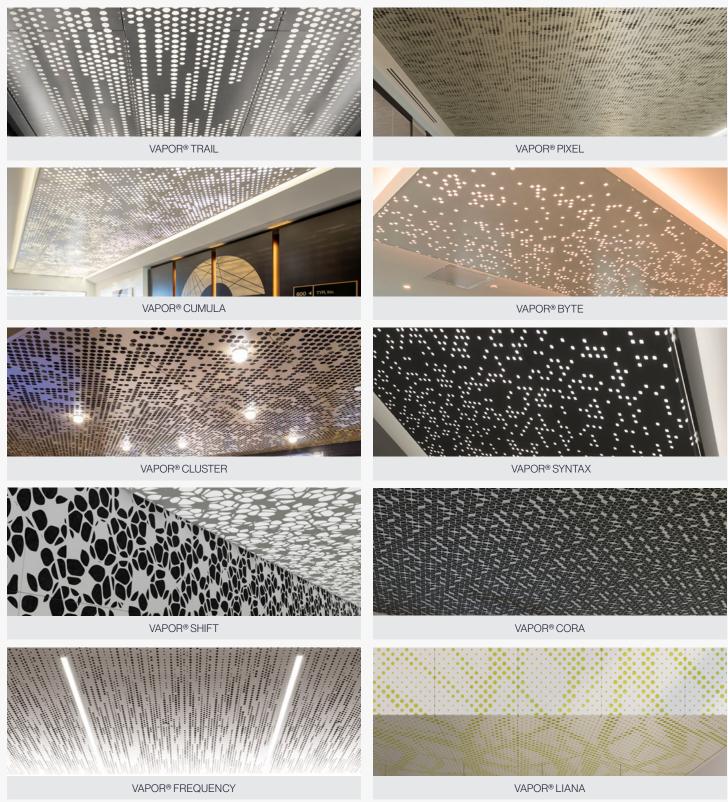

www.arktura.com | info@arktura.com

Product Line

Design Options

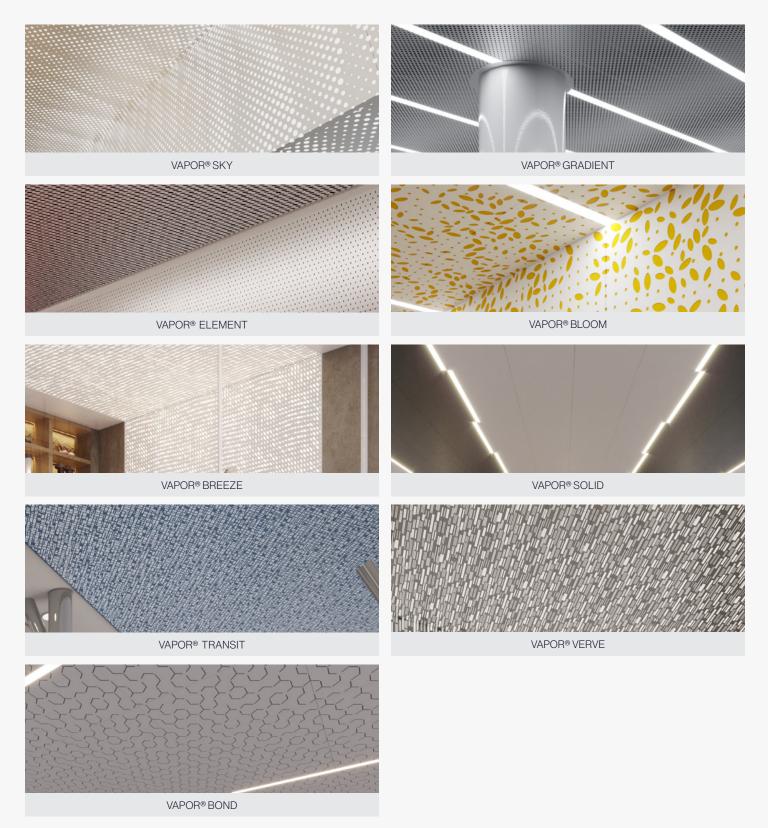

www.arktura.com | info@arktura.com